

Bond-Ply® 660P

Thermally Conductive, Film Reinforced, Pressure Sensitive Adhesive Tape

Features and Benefits

- Thermal impedance: 0.87°C-in²/W (@50 psi)
- Highly puncture resistant Polyimide reinforcement carrier
- Double-sided pressure sensitive adhesive tape
- Provides a mechanical bond, eliminating the need for mechanical fasteners or screws

Bond-Ply 660P is a thermally conductive, electrically insulating, double sided pressure sensitive adhesive tape. The tape consists of a high performance, thermally conductive acrylic adhesive coated on both sides of a Polyimide film. Use Bond-Ply 660P in applications to replace mechanical fasteners or screws.

Typical Applications Include:

- Heat sink onto BGA graphic processor
- Heat sink onto drive processor
- Heat spreader onto power converter PCB
- Heat spreader onto motor control PCB

Configurations Available:

- Roll form and die-cut parts


The material as delivered will include a continuous base liner with differential release properties to allow for simplicity in roll packaging and application assembly.

TYPICAL PROPERTIES OF BOND-PLY 660P				
PROPERTY	IMPERIAL VALUE	METRIC VALUE	TEST METHOD	
Color	Light Brown	Light Brown	Visual	
Reinforcement Carrier	Polyimide Film	Polyimide Film	—	
Thickness (inch) / (mm)	0.008	0.203	ASTM D374	
Glass Transition (°F) / (°C)	-22	-30	ASTM E1356	
Continuous Use Temp (°F) / (°C)	-22 to 248	-30 to 120	—	
ADHESION				
Lap Shear @ RT (psi) / (MPa)	100	0.7	ASTM D1002	
Lap Shear after 5 hr @ 100°C	200	1.4	ASTM D1002	
Lap Shear after 2 min @ 200°C	200	1.4	ASTM D1002	
ELECTRICAL				
Dielectric Breakdown Voltage (kVAC)	6000	6000	ASTM D149	
Flame Rating	V-O	V-O	UL.94	
THERMAL				
Post-Cured Thermal Conductivity (W/m-K)	0.4	0.4	ASTM D5470	
THERMAL PERFORMANCE vs PRESSURE				
Initial Assembly Pressure (psi for 5 seconds)	10	25	50	100
			200	
TO-220 Thermal Performance (°C/W)	5.48	5.47	5.15	5.05
Thermal Impedance (°C-in ² /W) (1)	0.83	0.82	0.81	0.80
				0.79

1) The ASTM D5470 test fixture was used. The recorded value includes interfacial thermal resistance. These values are provided for reference only. Actual application performance is directly related to the surface roughness, flatness and pressure applied.

Shelf Life: The double-sided pressure sensitive adhesive used in Bond-Ply products requires the use of dual liners to protect the surfaces from contaminants. Bergquist recommends a 6-month shelf life at a maximum continuous storage temperature of 35°C, or 3-month shelf life at a maximum continuous storage temperature of 45°C, for maintenance of controlled adhesion to the liner. The shelf life of the Bond-Ply material, without consideration of liner adhesion (which is often not critical for manual assembly processing), is recommended at 12 months from date of manufacture at a maximum continuous storage temperature of 60°C.

Building a Part Number

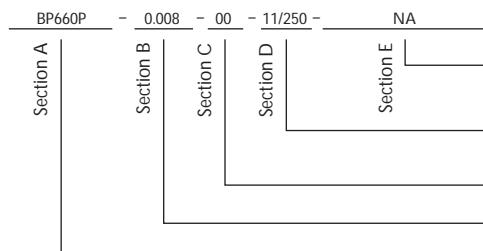

Standard Options

« example

NA = Selected standard option. If not selecting a standard option, insert company name, drawing number, and revision level.

11/250 = 11" x 250' rolls or 00 = custom configuration

00 = No adhesive

Standard thicknesses available: 0.008"

BP660P = Bond-Ply 660P Material

Note: To build a part number, visit our website at www.bergquistcompany.com.

Bond-Ply®: U.S. Patent 5,090,484 and others.



www.bergquistcompany.com

The Bergquist Company -
North American Headquarters
18930 West 78th Street
Chanhassen, MN 55317
Phone: 800-347-4572
Fax: 952-835-0430

The Bergquist Company -
European Headquarters
Bramenberg 9a, 3755 BT Eemnes
Netherlands
Phone: 31-35-5380684
Fax: 31-35-5380295

The Bergquist Company - Asia
Room 15, 8/F Wah Wai Industrial Centre
No. 38-40, Au Pui Wan Street
Fotan, Shatin, N.T. Hong Kong
Ph: 852.2690.9296
Fax: 852.2690.2344

All statements, technical information and recommendations herein are based on tests we believe to be reliable and THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MARKETABILITY AND FITNESS FOR PURPOSE. Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. Before using, user shall determine the suitability of the product for its intended use, and the user assumes all risks and liability whatsoever in connection therewith. NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE EITHER IN TORT OR IN CONTRACT FOR ANY LOSS OR DAMAGE, DIRECT, INCIDENTAL, OR CONSEQUENTIAL, INCLUDING LOSS OF PROFITS OR REVENUE ARISING OUT OF THE USE OR THE INABILITY TO USE A PRODUCT. No statement, purchase order or recommendations by seller or purchaser not contained herein shall have any force or effect unless in an agreement signed by the officers of the seller and manufacturer.

PDS_BP_660P_12.08