

Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform Per Device	60	A
V_{RRM}	15	V
I_{FSM} @ tp = 5 μ s sine	1850	A
V_F @ 30 Apk, $T_J = 125^\circ\text{C}$ (typical) per leg	0.28	V
T_J range	-55 to 125	$^\circ\text{C}$

Description/ Features

This center tap Schottky rectifier has been optimized for low forward voltage drop. The proprietary sub-micron technology allows for low power loss both in forward and reverse conduction.


- 125 $^\circ\text{C}$ T_J operation
- Center tap configuration
- Low forward voltage drop
- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance

Case Styles

60CTT015



TO-220



Voltage Ratings

Part number	60CTT015
V _R Max. DC Reverse Voltage (V) @ T _J = 125°C	15

Absolute Maximum Ratings

Parameters	Values	Units	Conditions
I _{F(AV)} Max. Average Forward Current (Per Leg) (Per Device)	30 60	A	50% duty cycle @ T _C = 105°C, rectangular wave form
I _{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg)	1850 360	A	5μs Sine or 3μs Rect. pulse 10ms Sine or 6ms Rect. pulse Following any rated load condition and with rated V _{RRM} applied
E _{AS} Non-Repetitive Avalanche Energy (Per Leg)	9.0	mJ	T _J = 25 °C, I _{AS} = 2 Amps, L = 4.5 mH
I _{AR} Repetitive Avalanche Current (Per Leg)	2	A	Current decaying linearly to zero in 1μsec Frequency limited by T _J max. V _A = 1.5 x V _R typical

Electrical Specifications

Parameters	Typ	Max	Units	Conditions
V _{FM} Max. Forward Voltage Drop (Per Leg) (1)	0.36	0.40	V	@ 30A T _J = 25°C
	0.44	0.49	V	@ 60A
	0.28	0.32	V	@ 30A T _J = 125°C
	0.39	0.45	V	@ 60A
I _{RM} Max. Reverse Leakage Current (Per Leg) (1)	2.0	3.5	mA	T _J = 25 °C
	450	600	mA	T _J = 125 °C
C _T Junction Capacitance (Per Leg)	2900	-	pF	V _R = 10V _{DC} (test signal range 100KHz to 1MHz) 25°C
L _S Series Inductance (Per Leg)	8.0	-	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change	-	10000	V/μs	(Rated V _R)

(1) Pulse Width < 300μs, Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters		Values	Units	Conditions
T _J	Max. Junction Temperature Range	-55 to 125	°C	
T _{stg}	Max. Storage Temperature Range	-55 to 150	°C	
R _{thJC}	Max. Thermal Resistance Junction to Case (Per Leg)	1.2	°C/W	DC operation
R _{thCS}	Typical Thermal Resistance, Case to Heatsink	0.5	°C/W	Mounting surface , smooth and greased
wt	Approximate Weight		2 (0.07)	g (oz.)
T	Mounting Torque	Min.	6 (5)	Kg-cm
		Max.	12 (10)	(lbf-in)
Case Style		TO-220AB		

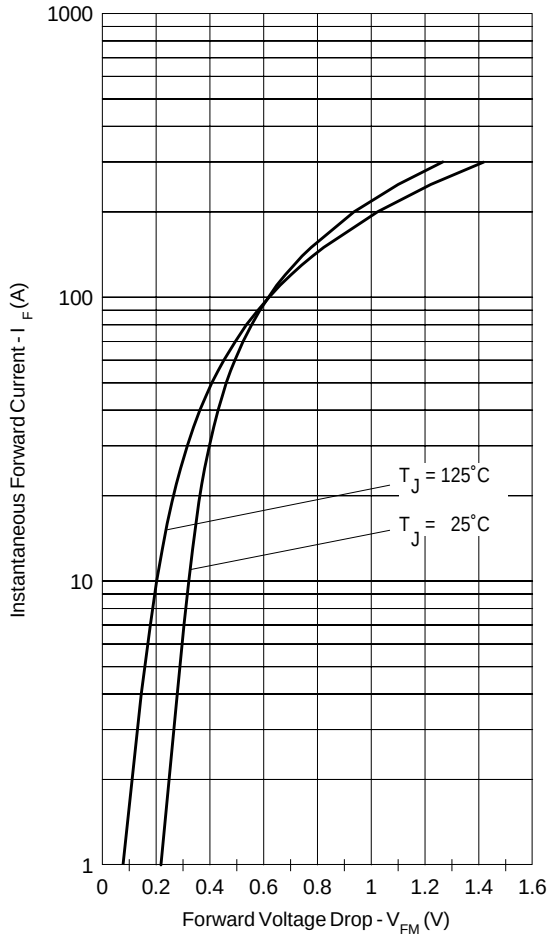


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

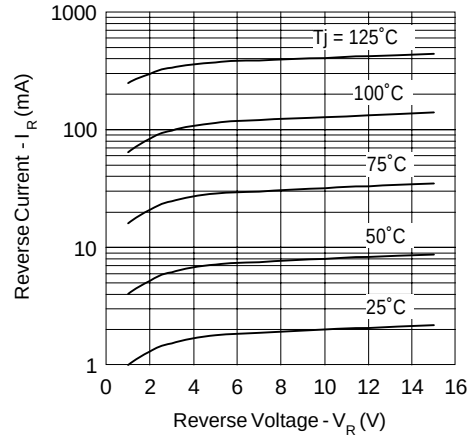


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

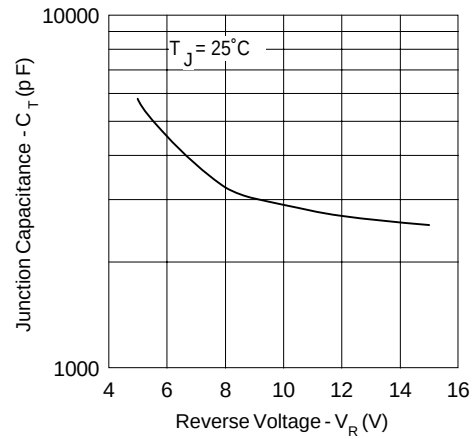


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

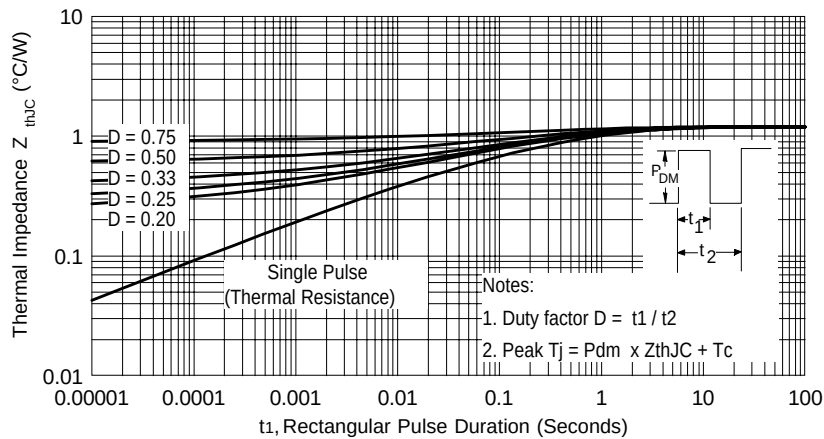


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

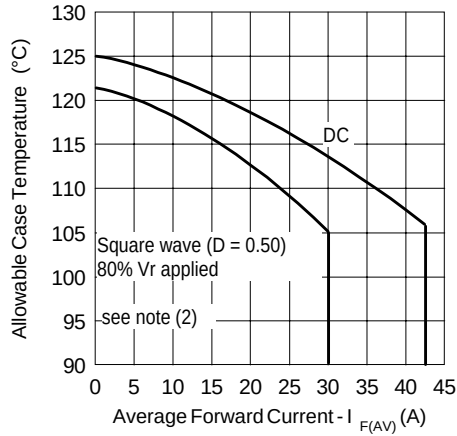


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

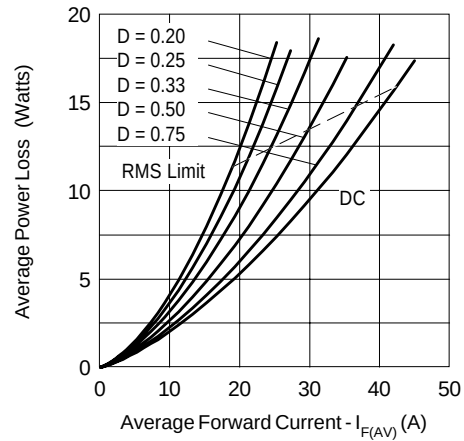


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

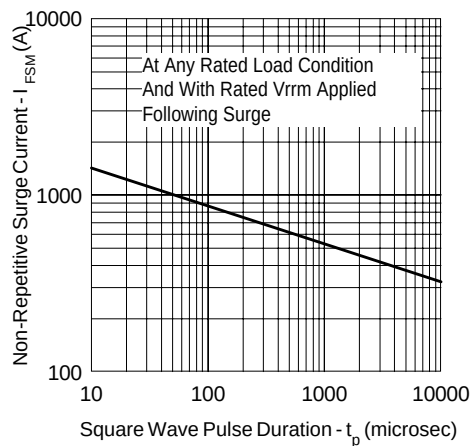


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

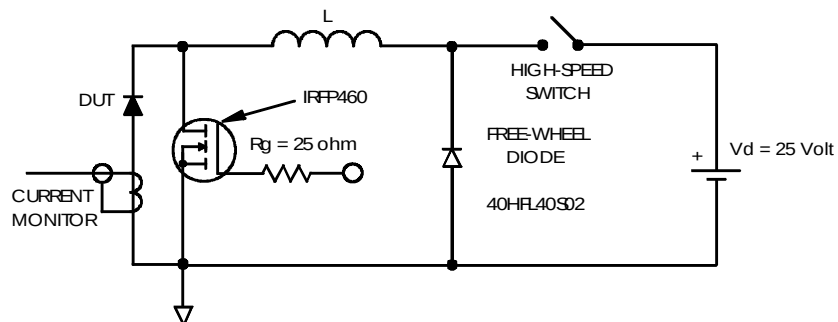



Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;

P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_{R1} (1 - D)$; I_{R1} @ 80% V_R applied

Outline Table

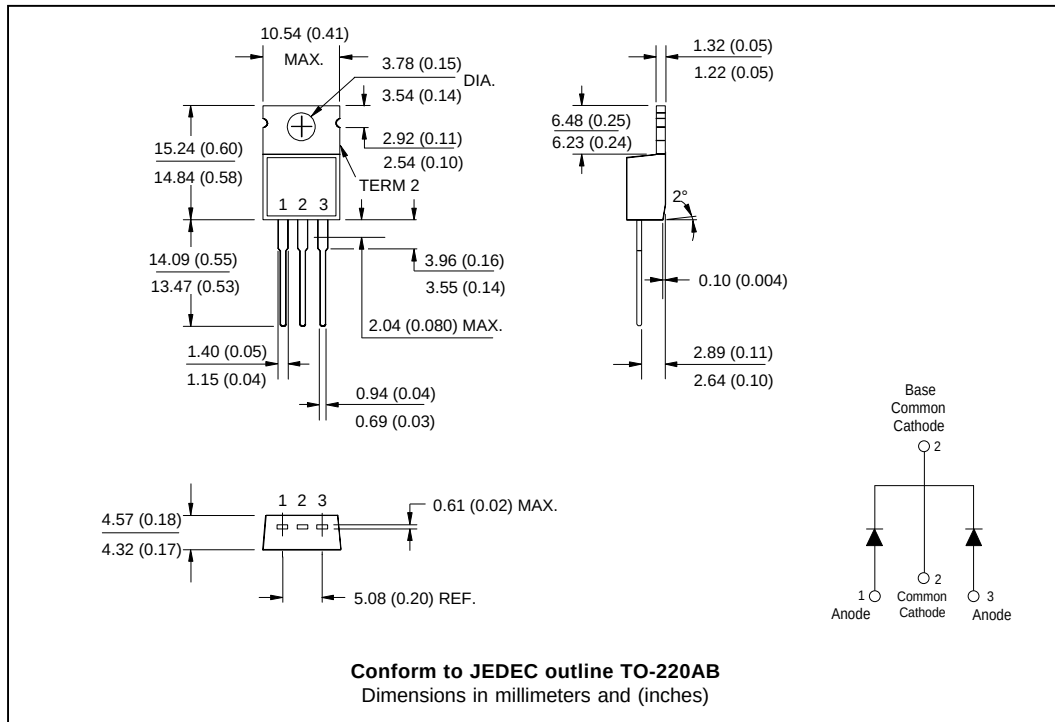

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.