

SERIES 1005 - MINIATURE SNAP-ACTION SWITCHES

TO 21 (8) A 250 V AC



PRODUCT FEATURES

- ◆ Friction contact system whose shearing movement can loosen weldings
- ◆ Very high inrush currents (capacitive)
- ◆ Contact distances less and greater than 3 mm
- ◆ Operating forces from 0.2 to 4.2 N

ON REQUEST

- ◆ Material conform with the filament wire test acc. to IEC 60335-1:2001 chap. 30
- ◆ Side bearing terminal
- ◆ Electrical rating 16 (16) A 250 V 5E4 for normally closed and normally open version

Design	DIN 41635 A
Mechanical life endurance	5E6 version with lever or contact spacing > 3 mm 10E6 standard version 5E4 version with curved spring steel lever
Contact resistance (new condition)	< 100 mOhm (1 A 12 V DC)
Insulation resistance (new condition)	> 100 MOhm (500 V DC)
Proof tracking	250 PTI
Ambient temperature	-40 °C ... +100 °C on request ... +125 °C ... +85 °C
Flammability	UL 94 (housing: V-0, actuator: V-2) UL 94 V-2
Glow wire test temperature	850 °C
Material	actuator PA additional actuator galvanized steel / spring steel / stainless steel housing Duroplast type 182 / PA glass fiber-reinforced terminals silver plated / chromated
Bounce time	< 10 ms
Approval marks	CE / UL / C
Suitable for appliances of protection class II under compliance with the installation conditions required on the equipment side	



SERIES 1005 - MINIATURE SNAP-ACTION SWITCHES

TO 21 (8) A 250 V AC

															
21 (8) A 250 V AC 25E3															
20 (4) A 400 V AC 1E4															
16 (16) A 250 V AC 5E4															
16 (4) A 400 V AC 5E4															
16 (4) A 250 V AC 5E4															
16 (4) A 250 V AC 25E3															
12 (12) A 250 V AC 5E4															
10 (6) A 250 V AC 5E4															
10 (4) A 400 V AC 1E4															
10 (4) A 250 V AC 5E4															
8 (8) A 250 V AC 5E4															
6 (2.5) A 400 V AC 5E4															
6 (2.5) A 250 V AC 5E4															
21 A 250 V AC 2 HP															
21 A 125 V AC 1 HP															
16 A 250 V AC 2 HP															
16 A 125 V AC 1 HP															
16 A 125 - 250 V AC 1/2 HP															
10 A 125 - 250 V AC 1/2 HP															
10 A 125 - 250 V AC 1/4 HP															
8 A 125 - 250 V AC 1/3 HP															
4 A 125 - 250 V AC 1/6 HP															
Terminal type															
Terminal description															
Contact distance in mm															
Contact material															
Operating force in N															
Operating position (OP) in mm															
Difference travel max. in mm															
Free position (FP) max. in mm															
Permissible total travel position (TP) in mm															
Actuator description															
Lever drawing															
Miscellaneous															
Stock version															

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

SERIES 1005 - MINIATURE SNAP-ACTION SWITCHES

TO 21 (8) A 250 V AC

	Changeover switch (SPDT momentary)															
	1005.0507	1005.1010	1004.0509	1005.0101	1005.0401	1005.1001	1005.3501	1006.0701	1006.0901	1006.1101	1006.1201	1006.1301	1006.1401	1006.1511	1006.1801	1006.4103
21 (8) A 250 V AC 25E3																
20 (4) A 400 V AC 1E4																
16 (16) A 250 V AC 5E4																
16 (4) A 400 V AC 5E4																
16 (4) A 250 V AC 5E4	●	●														
16 (4) A 250 V AC 25E3			●													
12 (12) A 250 V AC 5E4	●															
10 (6) A 250 V AC 5E4																
10 (4) A 400 V AC 1E4				●	●	●	●	●	●	●	●	●	●	●	●	●
10 (4) A 250 V AC 5E4			●													
8 (8) A 250 V AC 5E4		●														
6 (2.5) A 400 V AC 5E4				●	●	●	●	●	●	●	●	●	●	●	●	●
6 (2.5) A 250 V AC 5E4																
21 A 250 V AC 2 HP																
21 A 125 V AC 1 HP																
16 A 250 V AC 2 HP																
16 A 125 V AC 1 HP																
16 A 125 - 250 V AC 1/2 HP	●		●													
10 A 125 - 250 V AC 1/2 HP		●														
10 A 125 - 250 V AC 1/4 HP				●	●	●	●	●	●	●	●	●	●	●	●	●
8 A 125 - 250 V AC 1/3 HP																
4 A 125 - 250 V AC 1/6 HP																
Terminal type																
Terminal description		6.3		M3		6.3				6.3	6.3	6.3	6.3	6.3	6.3	
Contact distance in mm	< 3	> 3	< 3	< 3	< 3	< 3	< 3	< 3	< 3	< 3	< 3	< 3	< 3	< 3	< 3	< 3
Contact material	Ag	Ag	Ag	Ag	Ag	Ag	Ag	Ag	Ag	Ag	Ag	Ag	Ag	Ag	Ag	Ag
Operating force in N	2.4 - 3.8	2.4 - 3.8	0.8 - 1.8	1.5 - 2.5	1.5 - 2.5	1.5 - 2.5	1.5 - 2.5	1.5 - 2.5	0.8 - 1.4	1.5 - 2.5	1.5 - 2.5	0.3 - 0.55	0.8 - 1.4	0.7 - 1.25	1.5 - 2.5	1.5 - 2.5
Operating position (OP) in mm	14.7 ± 0.5	14.4 ± 0.3	14.7 ± 0.5	14.7 ± 0.5	14.7 ± 0.5	14.7 ± 0.5	14.7 ± 0.5	20.8 ± 0.5	15.4 ± 1.2	15.3 ± 0.5	20.8 ± 0.5	15.7 ± 2.7	15.4 ± 1.2	20.8 ± 1.2	22 ± 1	20.8 ± 0.5
Difference travel max. in mm	0.3	1.2	0.1 - 0.25	0.3	0.3	0.3	0.3	0.3	0.7	0.3	0.3	1.8	0.7	0.9	0.6	0.3
Free position (FP) max. in mm	13.4 16	13.4 16	13.4 16	13.4 16	13.4 16	13.4 16	13.4 16	19.5 22.1	12.6 18.2	14 16.6	19.5 22.1	9.8 21.5	12.6 18.2	18 23.5	18.5 24.5	19.5 22.1
Permissible total travel position (TP) in mm	13.4 16	13.4 16	13.4 16	13.4 16	13.4 16	13.4 16	13.4 16	19.5 22.1	12.6 18.2	14 16.6	19.5 22.1	9.8 21.5	12.6 18.2	18 23.5	18.5 24.5	19.5 22.1
Actuator description	□	□	□	□	□	□	□									
Lever drawing								L11	L02	L01	L11	L04	L02	L12	L31	L11
Miscellaneous			milled bearing blade													
Stock version				●	●	●		●			●	●	●	●	●	

SERIES 1005 - MINIATURE SNAP-ACTION SWITCHES

TO 21 (8) A 250 V AC

		Changeover switch (SPDT momentary)			
		1006.4203	1004.4601	1004.0402	1004.1002
21 (8) A 250 V AC 25E3					
20 (4) A 400 V AC 1E4					
16 (16) A 250 V AC 5E4					
16 (4) A 400 V AC 5E4					
16 (4) A 250 V AC 5E4					
16 (4) A 250 V AC 25E3					
12 (12) A 250 V AC 5E4					
10 (6) A 250 V AC 5E4					
10 (4) A 400 V AC 1E4		●			
10 (4) A 250 V AC 5E4			●		
8 (8) A 250 V AC 5E4					
6 (2.5) A 400 V AC 5E4		●			
6 (2.5) A 250 V AC 5E4				●	●
21 A 250 V AC 2 HP					
21 A 125 V AC 1 HP					
16 A 250 V AC 2 HP					
16 A 125 V AC 1 HP					
16 A 125 - 250 V AC 1/2 HP					
10 A 125 - 250 V AC 1/2 HP					
10 A 125 - 250 V AC 1/4 HP		●			
8 A 125 - 250 V AC 1/3 HP			●		
4 A 125 - 250 V AC 1/6 HP				●	●
Terminal type					
Terminal description			6.3		6.3
Contact distance in mm		< 3	< 3	< 3	< 3
Contact material		Ag	Ag	Ag	Ag
Operating force in N		1.5 - 2.5	0.5 - 1.1	0.2 - 0.6	0.2 - 0.6
Operating position (OP) in mm		20.8 ± 0.5	20.8 ± 0.5	14.7 ± 0.5	14.7 ± 0.5
Difference travel max. in mm		0.3	0.3	0.3	0.3
Free position (FP) max. in mm		19.5 22.1	19.5 22.1	13.4 16	13.4 16
Permissible total travel position (TP) in mm		19.5 22.1	19.5 22.1	13.4 16	13.4 16
Actuator description					
Lever drawing		L11	L11		
Miscellaneous			milled bearing blade	milled bearing blade	milled bearing blade
Stock version				●	●

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

SERIES 1005 - MINIATURE SNAP-ACTION SWITCHES

TO 21 (8) A 250 V AC

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES


SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES


SENSORS




Basic type 1005

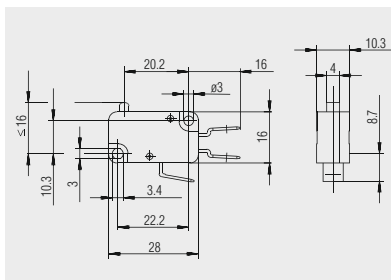


Quick-connect terminal 6.3 x 0.8

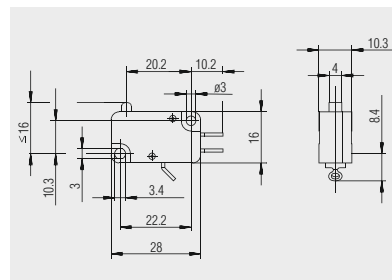


Solder terminal

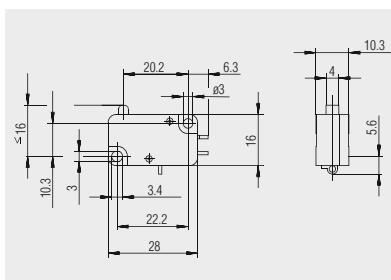


Short solder terminal

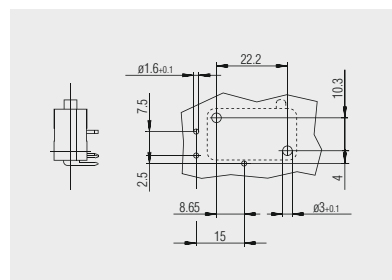

PCB terminal (cover side)
right angled

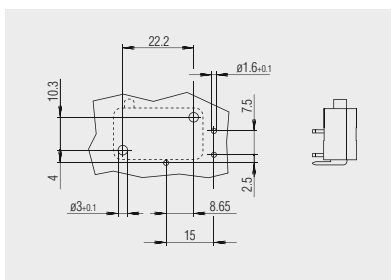


PCB terminal (base side)
left angled

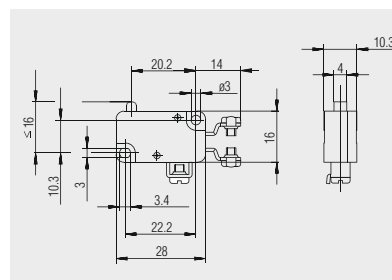


Screw terminal M3




Basic type 1005

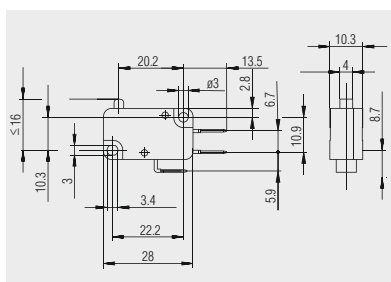


Quick-connect terminal 4.8 x 0.8
straight

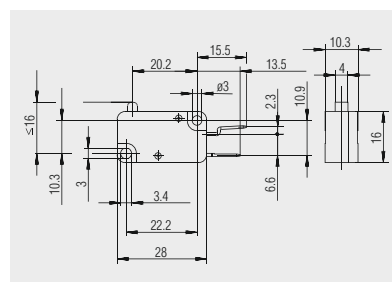

Quick-connect terminal 4.8 x 0.8
top side

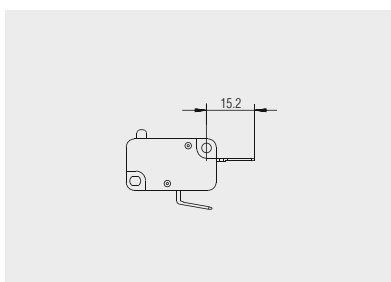

Quick-connect terminal 6.3 x 0.8
normally open contact version

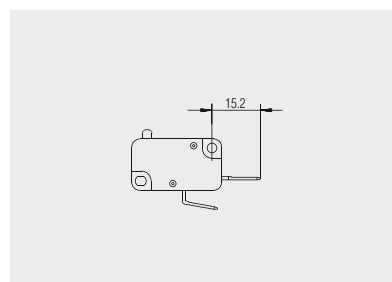


Quick-connect terminal 6.3 x 0.8
normally closed contact version

SERIES 1005 - MINIATURE SNAP-ACTION SWITCHES

TO 21 (8) A 250 V AC




Basic types 1004 and 1005
switching positions




FP: free position
OP: operating position
TP: permissible total travel position




Basic type 1006
auxiliary actuator




L01: straight lever




L02: straight lever




L04: straight lever




L11: roller lever



L12: roller lever



L21: simulated roller



L31: spring lever

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES


SENSORS

SERIES 1005 - MINIATURE SNAP-ACTION SWITCHES


TO 21 (8) A 250 V AC




Additional parts



Insulating plate for solder terminal
0.5 mm: 231.009.011



Insulating plate for quick-connect terminal
0.5 mm: 231.010.011
0.8 mm: 231.010.021



Stainless spring steel

lever 20.6 long with roller diameter 5
out of PA yellow (to be mounted lateral
with the switch using screws)

191.013.013

Further information under

WWW.MARQUARDT-SWITCHES.COM