




REVISIONS						
P	LTR	DESCRIPTION			DATE	OWN
S		REVISED	PER	ECO-12-015521	28SEP12	KH
T		REVISED	PER	ECO-17-000037	10MAR2017	RS

D

C



B

A

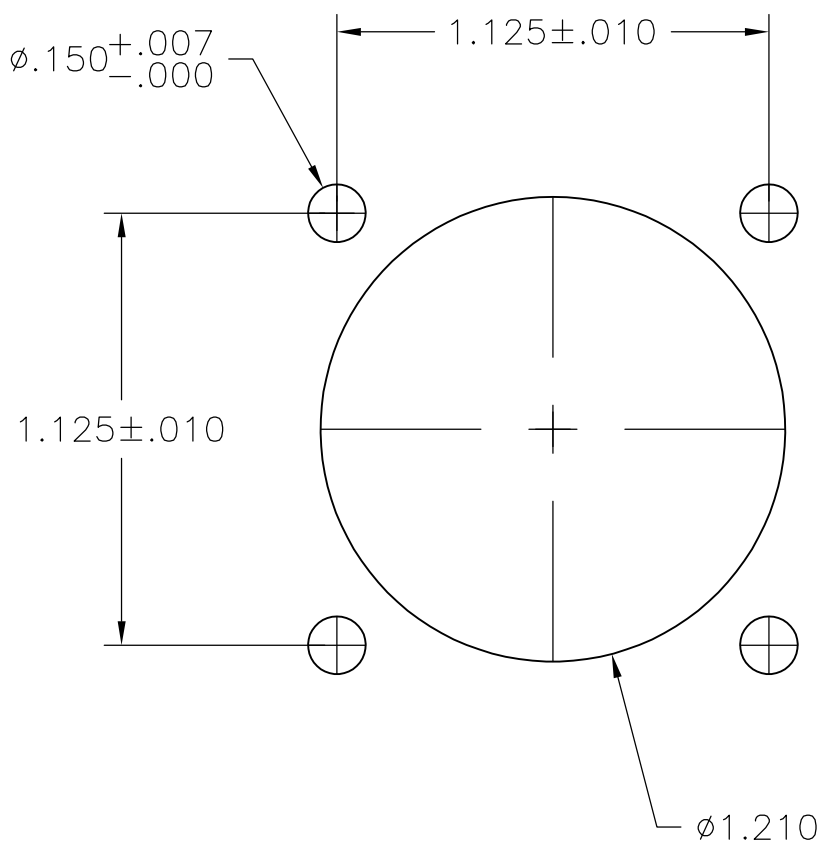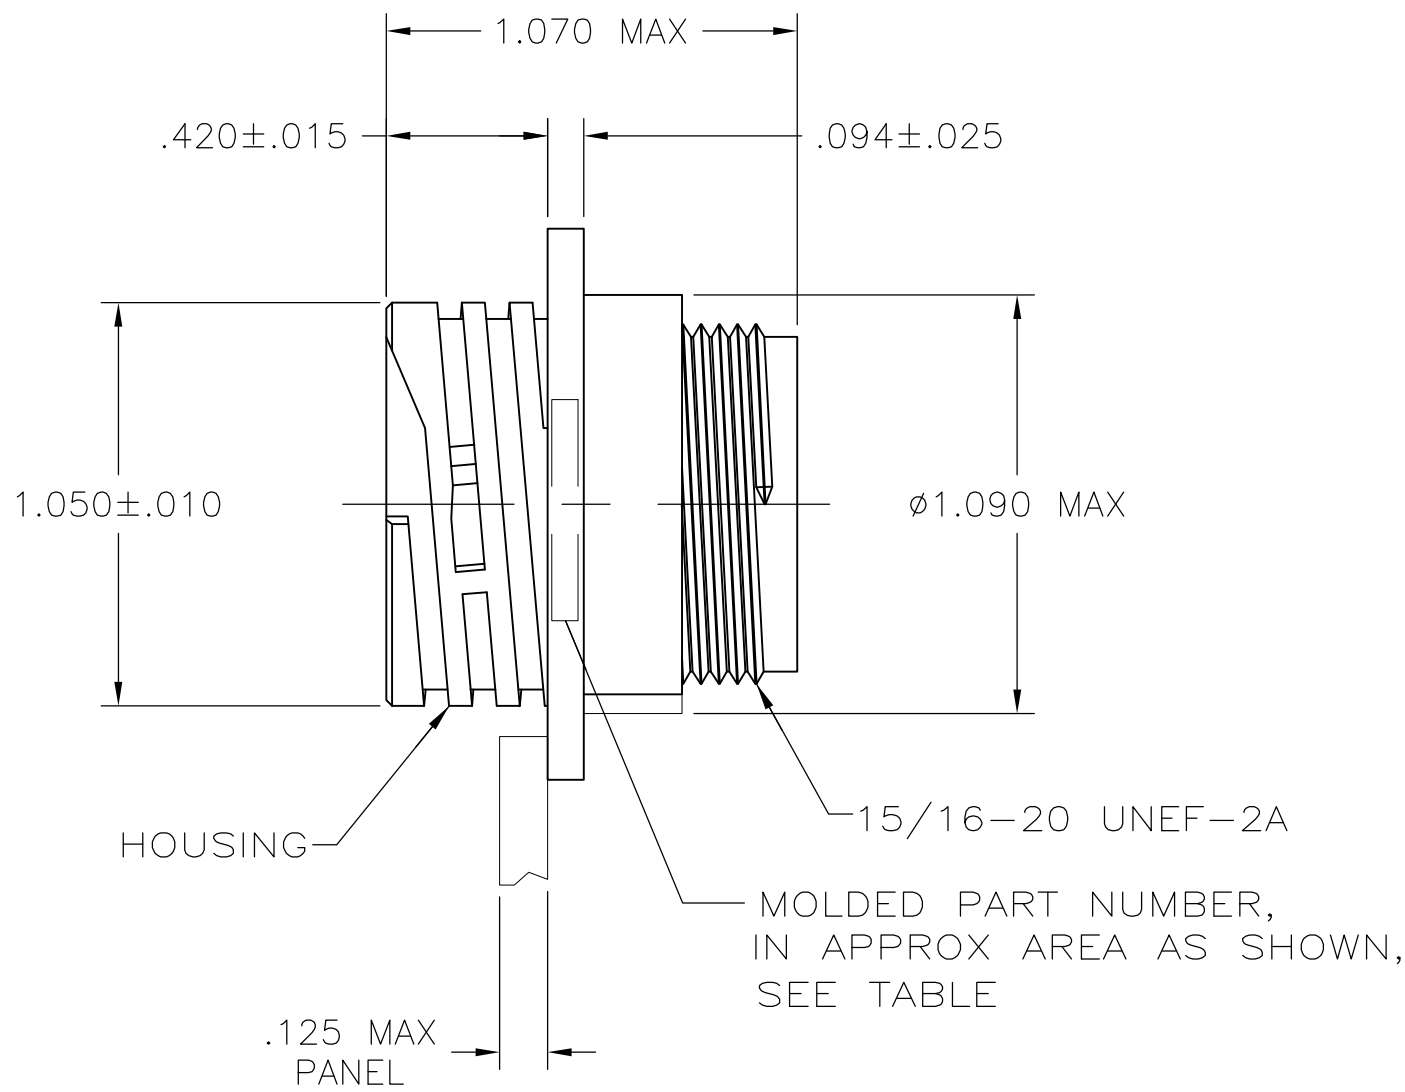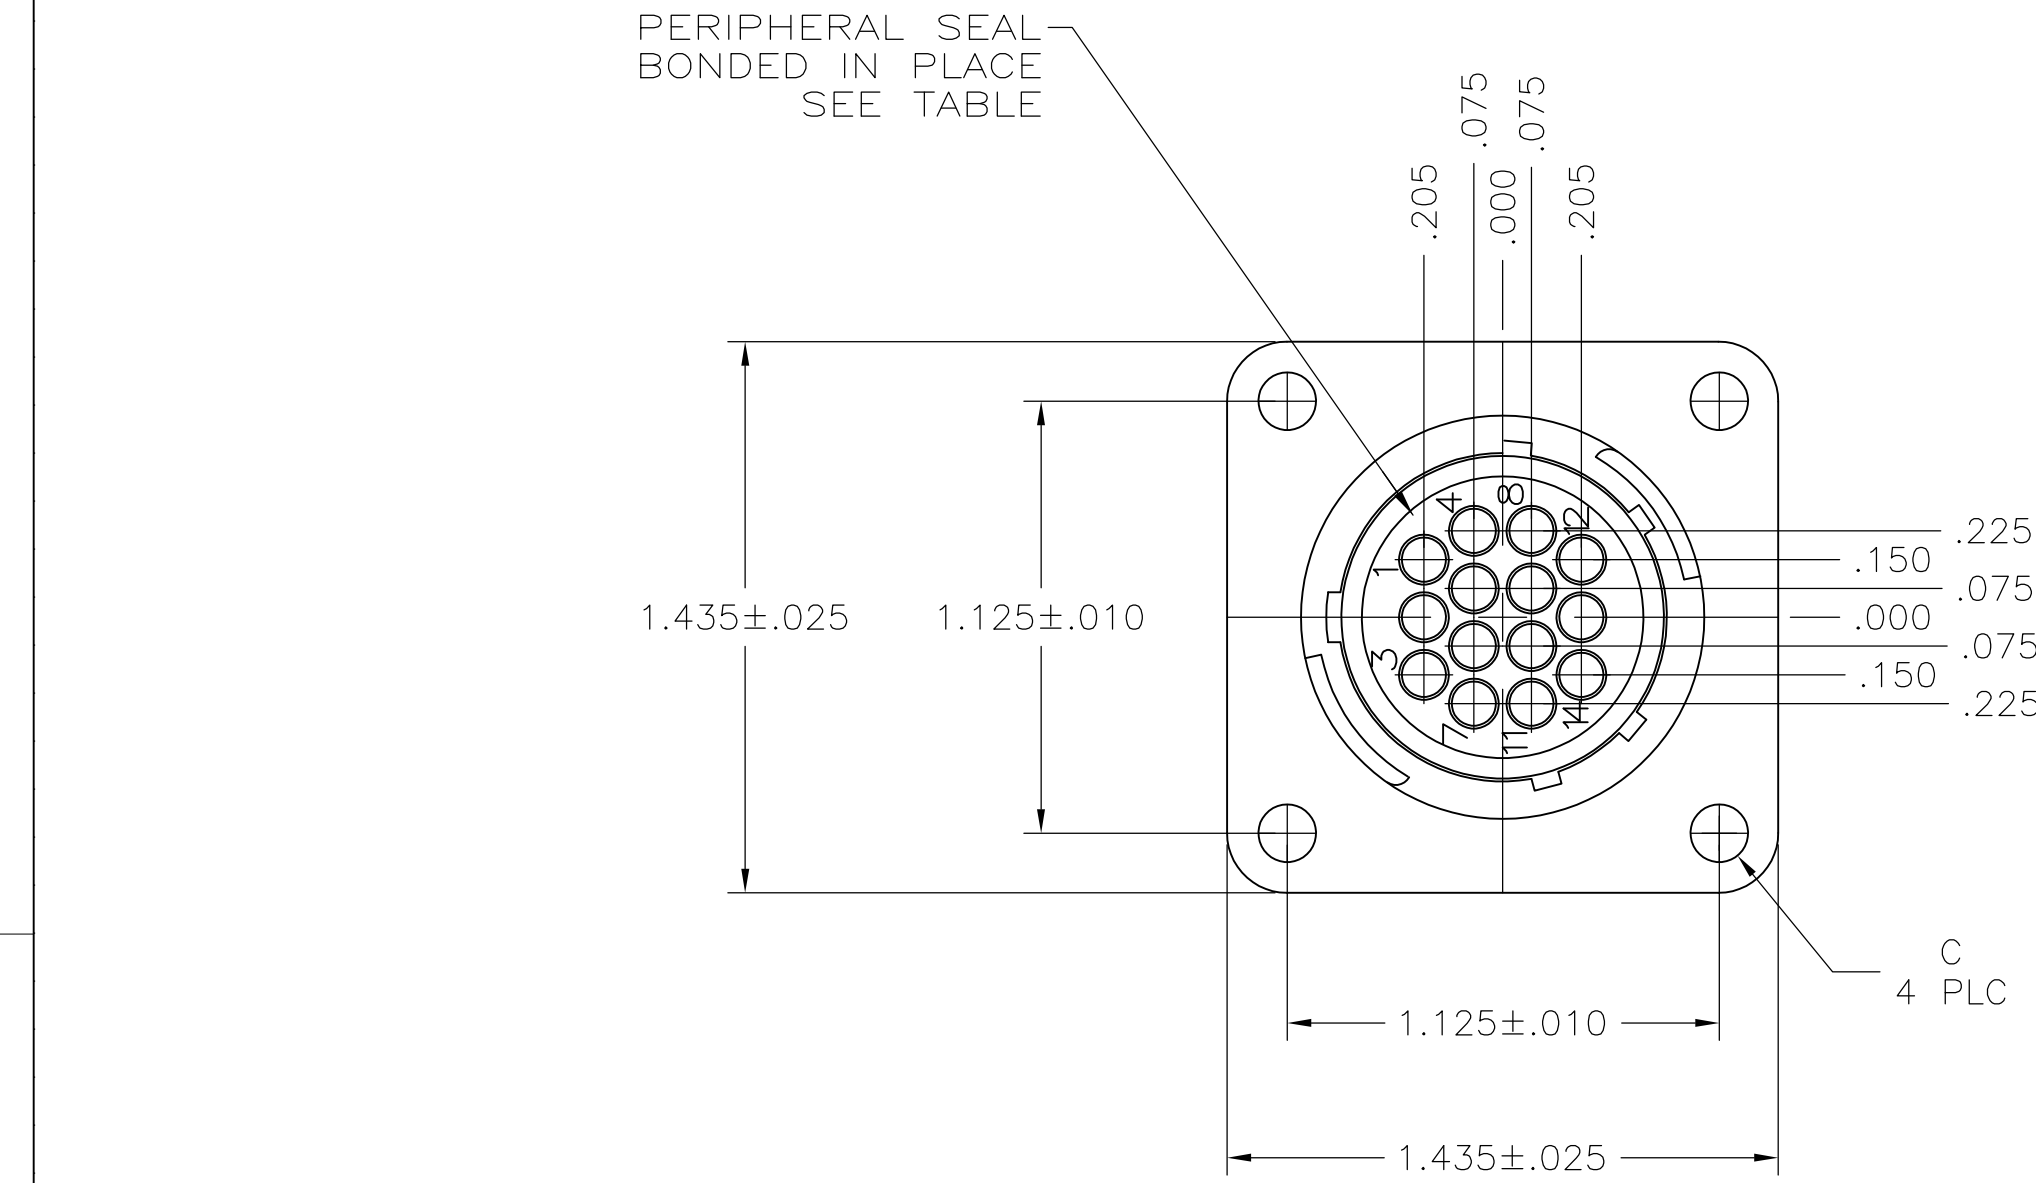

RECOMMENDED PANEL CUTOUT


DETAIL A

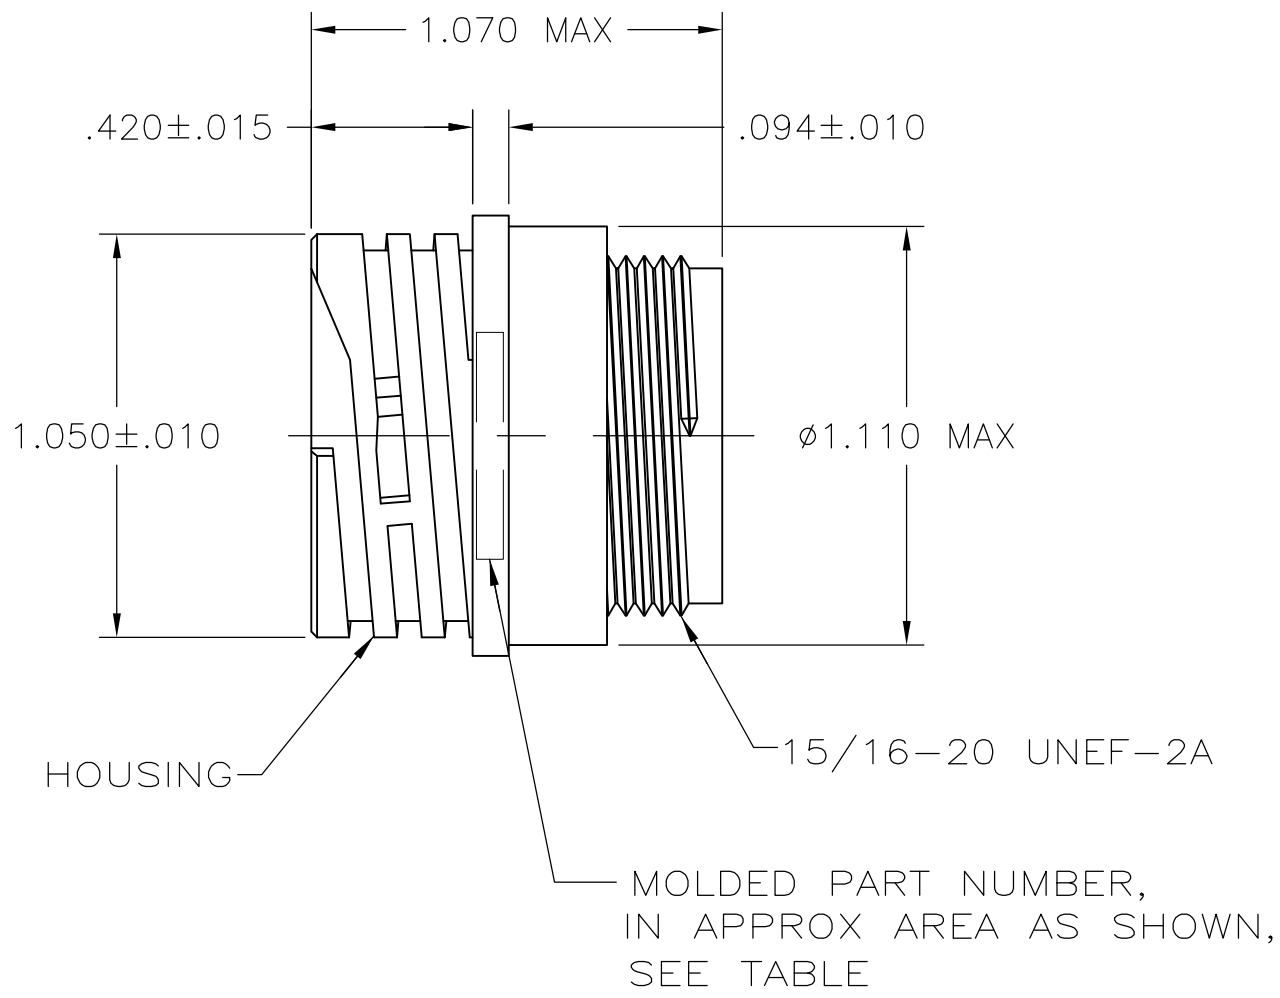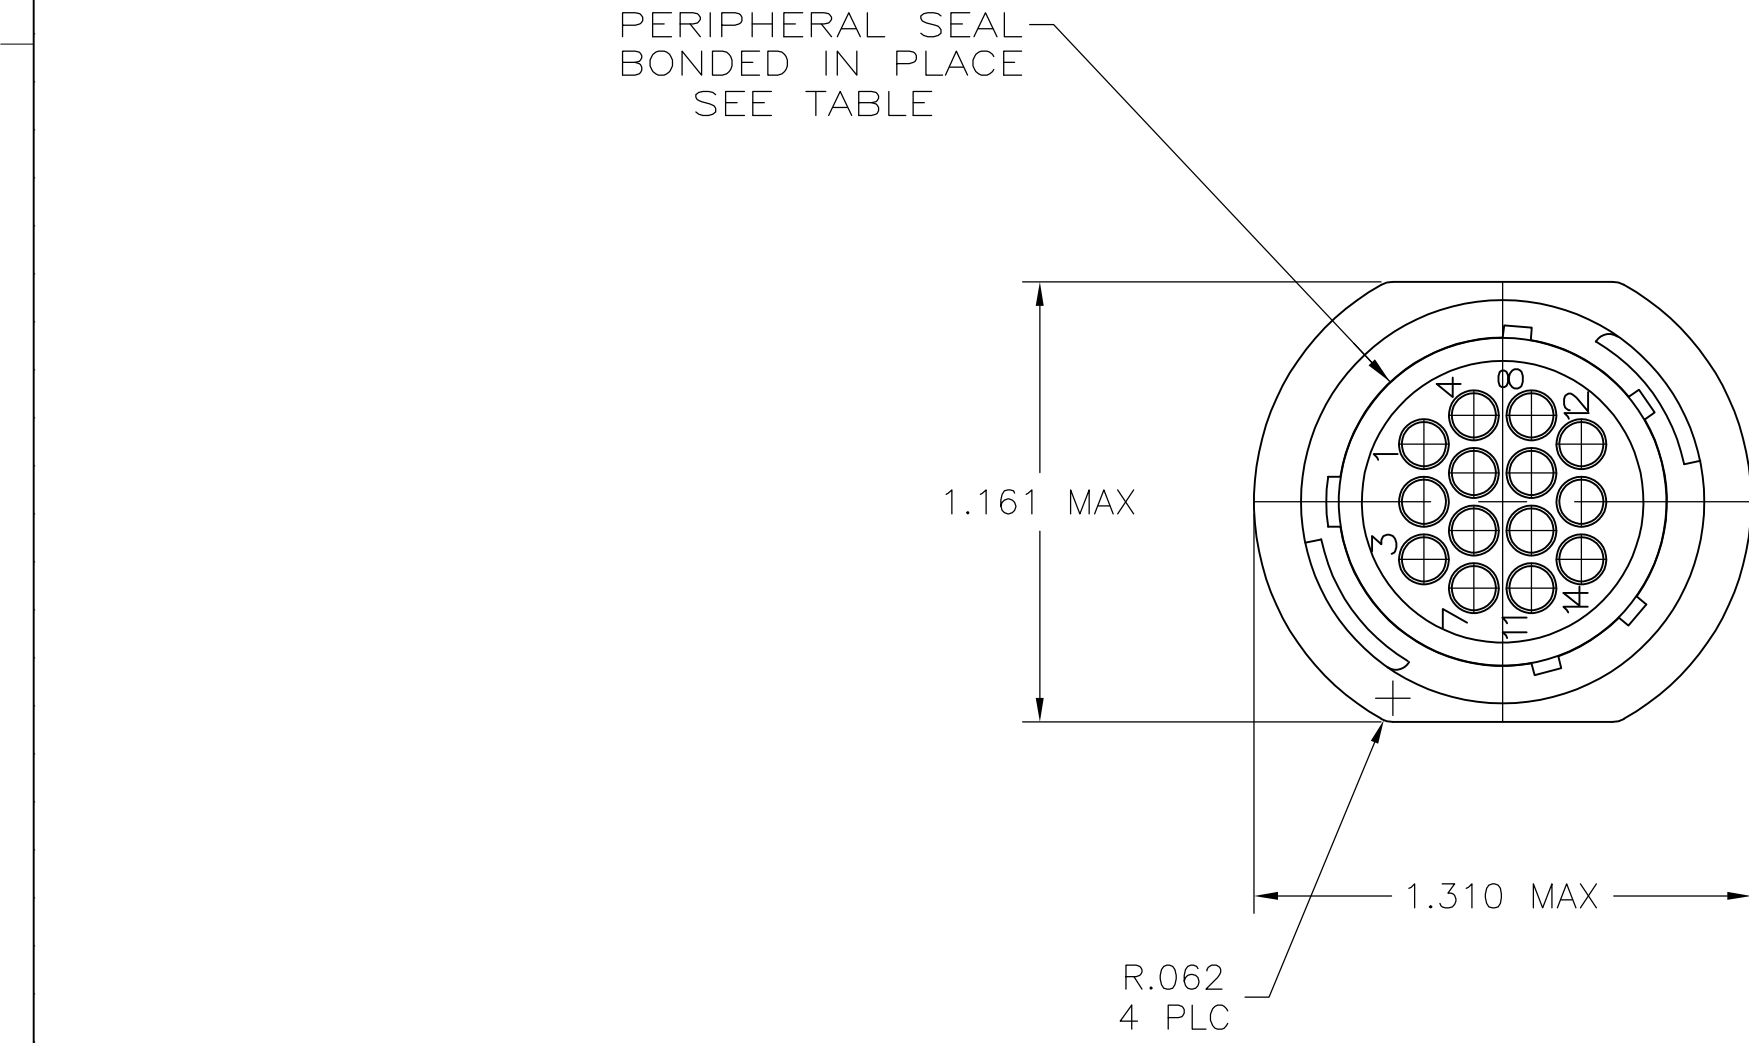

DETAIL B

- 1 CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
- 2 WILL ACCEPT FOURTEEN (14) MULTIMATE SOCKET CONTACTS.

OBsolete	4-40 THREADED INSERTS	-	STANDARD	YES	A	206043-8
OBsolete	Ø.150	-	SMALL PACK	NO	A	206043-6
-	-	-	STANDARD	YES	B	206043-5
Ø.150	-	-	STANDARD	YES	A	206043-4
-	-	-	STANDARD	NO	B	206043-3
Ø.150	206043-1	-	STANDARD	NO	A	206043-1
DIM C		MOLDED PART NUMBER	PACKAGING	PERIPHERAL SEAL	SEE DETAIL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN W. LENKER CHK R. STONE APVD -		09/10/92 08/11/93		 TE Connectivity				
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		RECEPTACLE ASSEMBLY, REVERSE SEX, SERIES 1, 17-14, CPC					
		0 PLC ± -		1 PLC ± -		PRODUCT SPEC					
		2 PLC ± 0.13 [.005]		3 PLC ± -		APPLICATION SPEC					
		4 PLC ± -		5 ANGLES ± -		SIZE					
		FINISH		WEIGHT		CAGE CODE		DRAWING NO		RESTRICTED TO	
		-		-		A1		00779		C=206043	
MATERIAL HOUSING: NYLON BLACK				CUSTOMER DRAWING		SCALE 2:1		SHEET 1 OF 1		REV T	