

## 34μA Micro-power Single and Dual Rail-to-Rail Input-Output (RRIO) Low Input Bias Current Op Amps

The ISL28168 and ISL28268 are micro-power operational amplifiers optimized for single supply operation over a power supply range of 2.4VDC to 5.5VDC. These devices draw minimal supply current and operate rail-to-rail at the input and output, while providing excellent DC-accuracy, noise and output drive specifications. Competing devices seriously degrade these parameters to achieve micro-power supply current.

The parts feature an Input Range Enhancement Circuit (IREC), which enables them to maintain CMRR performance for input voltages greater than the positive supply. The input signal is capable of swinging 0.25V above the positive supply and to 100mV below the negative supply with only a slight degradation of the CMRR performance. The output operation is rail-to-rail.

The 1/f corner of the voltage noise spectrum is at 100Hz. This results in low frequency noise performance, which can only be found on devices with an order of magnitude higher supply current.

ISL28168 and ISL28268 can be operated from one lithium cell or two Ni-Cd batteries. The ISL28168 contains an enable pin feature that allows the device to be shutdown when not in use.




## Features

- 34μA typical supply current
- 10pA typical input bias current
- 200kHz gain bandwidth product
- 2.4V to 5.5V single supply voltage range
- Rail-to-rail input and output
- Enable pin (ISL28168 only)
- Pb-free (RoHS compliant)





## Applications

- Battery- or solar-powered systems
- 4mA to 20mA current loops
- Handheld consumer products
- Medical devices
- Sensor amplifiers
- ADC buffers
- DAC output amplifiers

## Pinouts



## Pin Descriptions

| ISL28168<br>(6 Ld SOT-23) | ISL28268<br>(8 Ld SOIC)<br>(8 Ld MSOP) | PIN NAME               | FUNCTION            | EQUIVALENT CIRCUIT                                                                                     |
|---------------------------|----------------------------------------|------------------------|---------------------|--------------------------------------------------------------------------------------------------------|
| 4                         | 2 (A)<br>6 (B)                         | IN-<br>IN-_A<br>IN-_B  | Inverting input     |  <p>CIRCUIT 1</p>   |
| 3                         | 3 (A)<br>5 (B)                         | IN+<br>IN+_A<br>IN+_B  | Non-inverting input | See Circuit 1                                                                                          |
| 2                         | 4                                      | V-                     | Negative supply     |  <p>CIRCUIT 2</p>   |
| 1                         | 1 (A)<br>7 (B)                         | OUT<br>OUT_A<br>OUT_B  | Output              |  <p>CIRCUIT 3</p>  |
| 6                         | 8                                      | V+                     | Positive supply     | See Circuit 2                                                                                          |
| 5                         |                                        | $\overline{\text{EN}}$ | Chip enable         |  <p>CIRCUIT 3</p> |

**Ordering Information**

| <b>PART NUMBER</b><br><b>(Notes 3, 4)</b> | <b>PART</b><br><b>MARKING</b>  | <b>PACKAGE</b><br><b>(Pb-free)</b> | <b>PKG.</b><br><b>DWG. #</b> |
|-------------------------------------------|--------------------------------|------------------------------------|------------------------------|
| ISL28168FHZ-T7 (Note 1)                   | GACA (Note 5)                  | 6 Ld SOT-23                        | P6.064A                      |
| ISL28168FHZ-T7A (Note 1)                  | GACA (Note 5)                  | 6 Ld SOT-23                        | P6.064A                      |
| ISL28268FBZ (Note 2)                      | 28268 FBZ                      | 8 Ld SOIC                          | M8.15E                       |
| ISL28268FUZ (Note 2)                      | 8268Z                          | 8 Ld MSOP                          | M8.118A                      |
| ISL28168EVAL1Z                            | Evaluation Board - 6 Ld SOT-23 |                                    |                              |
| ISL28268SOICEVAL1Z                        | Evaluation Board - 8 Ld SOIC   |                                    |                              |
| ISL28268MSOPEVAL1Z                        | Evaluation Board - 8 Ld MSOP   |                                    |                              |

1. Please refer to TB347 for details on reel specifications.
2. Add "-T\*" suffix for tape and reel. Please refer to [TB347](#) for details on reel specifications
3. These Intersil Pb-free plastic packaged products employ special Pb-free material sets, molding compounds/die attach materials, and 100% matte tin plate plus anneal (e3 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations). Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.
4. For Moisture Sensitivity Level (MSL), please see device information page for [ISL28168, ISL28268](#). For more information on MSL please see techbrief [TB363](#).
5. The part marking is located on the bottom of the part.

**Absolute Maximum Ratings** ( $T_A = +25^\circ\text{C}$ )

|                                  |                        |
|----------------------------------|------------------------|
| Supply Voltage                   | 5.75V                  |
| Supply Turn-on Voltage Slew Rate | 1V/ $\mu\text{s}$      |
| Differential Input Current       | 5mA                    |
| Differential Input Voltage       | 0.5V                   |
| Input Voltage                    | V- - 0.5V to V+ + 0.5V |
| ESD Rating                       |                        |
| Human Body Model                 | 3kV                    |
| Machine Model                    | 300V                   |
| Charge Device Model              | 1500V                  |

**Thermal Information**

|                                                                                                                 |                                      |
|-----------------------------------------------------------------------------------------------------------------|--------------------------------------|
| Thermal Resistance (Note 6)                                                                                     | $\theta_{JA}$ ( $^\circ\text{C/W}$ ) |
| 6 Ld SOT-23 Package                                                                                             | 230                                  |
| 8 Ld SOIC Package                                                                                               | 120                                  |
| 8 Ld MSOP Package                                                                                               | 160                                  |
| Output Short-Circuit Duration                                                                                   | Indefinite                           |
| Ambient Operating Temperature Range                                                                             | -40°C to +125°C                      |
| Storage Temperature Range                                                                                       | -65°C to +150°C                      |
| Operating Junction Temperature                                                                                  | +125°C                               |
| <b>Pb-Free Reflow Profile</b> see link below                                                                    |                                      |
| <a href="http://www.intersil.com/pbfree/Pb-FreeReflow.asp">http://www.intersil.com/pbfree/Pb-FreeReflow.asp</a> |                                      |

**CAUTION:** Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.

**NOTE:**

6.  $\theta_{JA}$  is measured with the component mounted on a high effective thermal conductivity test board in free air. See Tech Brief [TB379](#) for details.

**IMPORTANT NOTE:** All parameters having Min/Max specifications are guaranteed. Typical values are for information purposes only. Unless otherwise noted, all tests are at the specified temperature and are pulsed tests, therefore:  $T_J = T_C = T_A$

**Electrical Specifications**  $V_+ = 5\text{V}$ ,  $V_- = 0\text{V}$ ,  $V_{CM} = 2.5\text{V}$ ,  $R_L = \text{Open}$ ,  $T_A = +25^\circ\text{C}$  unless otherwise specified.  
**Boldface limits apply over the operating temperature range, -40°C to +125°C.** Temperature data established by characterization.

| PARAMETER                        | DESCRIPTION                         | CONDITIONS                                                                   | MIN<br>(Note 7)       | TYP        | MAX<br>(Note 7)   | UNIT                         |
|----------------------------------|-------------------------------------|------------------------------------------------------------------------------|-----------------------|------------|-------------------|------------------------------|
| <b>DC SPECIFICATIONS</b>         |                                     |                                                                              |                       |            |                   |                              |
| $V_{OS}$                         | Input Offset Voltage                | ISL28168                                                                     | -1.6<br><b>-1.8</b>   | $\pm 0.09$ | 1.6<br><b>1.8</b> | mV                           |
|                                  |                                     | ISL28268                                                                     | -2.4<br><b>-2.6</b>   | $\pm 0.09$ | 2.4<br><b>2.6</b> | mV                           |
| $\frac{\Delta V_{OS}}{\Delta T}$ | Input Offset Voltage vs Temperature |                                                                              |                       | 0.3        |                   | $\mu\text{V}/^\circ\text{C}$ |
| $I_{OS}$                         | Input Offset Current                | $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$                             | -35<br><b>-80</b>     | $\pm 5$    | 35<br><b>80</b>   | pA                           |
| $I_B$                            | Input Bias Current                  | $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$                             | -30<br><b>-80</b>     | $\pm 10$   | 30<br><b>80</b>   | pA                           |
| CMIR                             | Common-Mode Voltage Range           | Guaranteed by CMRR                                                           | 0                     |            | 5                 | V                            |
| CMRR                             | Common-Mode Rejection Ratio         | $V_{CM} = 0\text{V}$ to $5\text{V}$                                          | 75<br><b>70</b>       | 98         |                   | dB                           |
| PSRR                             | Power Supply Rejection Ratio        | $V_+ = 2.4\text{V}$ to $5.5\text{V}$                                         | 80<br><b>75</b>       | 98         |                   | dB                           |
| $A_{VOL}$                        | Large Signal Voltage Gain           | $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 100\text{k}\Omega$ to $V_{CM}$ | 100<br><b>75</b>      | 220        |                   | V/mV                         |
|                                  |                                     | $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 1\text{k}\Omega$ to $V_{CM}$   |                       | 45         |                   | V/mV                         |
| $V_{OUT}$                        | Maximum Output Voltage Swing        | Output low, $R_L = 100\text{k}\Omega$ to $V_{CM}$                            |                       | 5.5        | 6<br><b>20</b>    | mV                           |
|                                  |                                     | Output low, $R_L = 1\text{k}\Omega$ to $V_{CM}$                              |                       | 135        | 150<br><b>250</b> | mV                           |
|                                  |                                     | Output high, $R_L = 100\text{k}\Omega$ to $V_{CM}$                           | 4.992<br><b>4.990</b> | 4.995      |                   | V                            |
|                                  |                                     | Output high, $R_L = 1\text{k}\Omega$ to $V_{CM}$                             | 4.84<br><b>4.77</b>   | 4.874      |                   | V                            |
| $I_{S,ON}$                       | Quiescent Supply Current, Enabled   | Per Amp                                                                      |                       | 34         | 43<br><b>55</b>   | $\mu\text{A}$                |

# ISL28168, ISL28268

## Electrical Specifications

$V_+ = 5V$ ,  $V_- = 0V$ ,  $V_{CM} = 2.5V$ ,  $R_L = \text{Open}$ ,  $T_A = +25^\circ\text{C}$  unless otherwise specified.

**Boldface limits apply over the operating temperature range,  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$ .** Temperature data established by characterization. (Continued)

| PARAMETER                    | DESCRIPTION                                                                                    | CONDITIONS                                                                                                                       | MIN<br>(Note 7) | TYP  | MAX<br>(Note 7)   | UNIT                         |
|------------------------------|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------|------|-------------------|------------------------------|
| $I_{S,OFF}$                  | Quiescent Supply Current, Disabled (ISL28168)                                                  |                                                                                                                                  |                 | 10   | 14<br><b>19</b>   | $\mu\text{A}$                |
| $I_{O+}$                     | Short-Circuit Output Source Current                                                            | $R_L = 10\Omega$ to $V_{CM}$                                                                                                     | 27<br><b>15</b> | 30   |                   | $\text{mA}$                  |
| $I_{O-}$                     | Short-Circuit Output Sink Current                                                              | $R_L = 10\Omega$ to $V_{CM}$                                                                                                     |                 | -25  | -22<br><b>-15</b> | $\text{mA}$                  |
| $V_{SUPPLY}$                 | Supply Operating Range                                                                         | $V_+$ to $V_-$                                                                                                                   | 2.4             |      | 5.5               | $\text{V}$                   |
| $V_{INH}$                    | $\overline{\text{EN}}$ Pin High Level (ISL28168)                                               |                                                                                                                                  | 2               |      |                   | $\text{V}$                   |
| $V_{INL}$                    | $\overline{\text{EN}}$ Pin Low Level (ISL28168)                                                |                                                                                                                                  |                 |      | 0.8               | $\text{V}$                   |
| $I_{ENH}$                    | $\overline{\text{EN}}$ Pin Input High Current (ISL28168)                                       | $V_{\overline{\text{EN}}} = V_+$                                                                                                 |                 | 1    | 1.5<br><b>1.6</b> | $\mu\text{A}$                |
| $I_{ENL}$                    | $\overline{\text{EN}}$ Pin Input Low Current (ISL28168)                                        | $V_{\overline{\text{EN}}} = V_-$                                                                                                 |                 | 12   | 25<br><b>30</b>   | $\text{nA}$                  |
| <b>AC SPECIFICATIONS</b>     |                                                                                                |                                                                                                                                  |                 |      |                   |                              |
| GBW                          | Gain Bandwidth Product                                                                         | $A_V = 100$ , $R_F = 100\text{k}\Omega$ , $R_G = 1\text{k}\Omega$ ,<br>$R_L = 10\text{k}\Omega$ to $V_{CM}$                      |                 | 200  |                   | $\text{kHz}$                 |
| Unity Gain Bandwidth         | -3dB Bandwidth                                                                                 | $A_V = 1$ , $R_F = 0\Omega$ , $V_{OUT} = 10\text{mV}_{P-P}$ ,<br>$R_L = 10\text{k}\Omega$ to $V_{CM}$                            |                 | 420  |                   | $\text{kHz}$                 |
| $e_N$                        | Input Noise Voltage Peak-to-Peak                                                               | $f = 0.1\text{Hz}$ to $10\text{Hz}$                                                                                              |                 | 1.4  |                   | $\mu\text{V}_{P-P}$          |
|                              | Input Noise Voltage Density                                                                    | $f_O = 1\text{kHz}$                                                                                                              |                 | 64   |                   | $\text{nV}/\sqrt{\text{Hz}}$ |
| $i_N$                        | Input Noise Current Density                                                                    | $f_O = 10\text{kHz}$                                                                                                             |                 | 0.19 |                   | $\text{pA}/\sqrt{\text{Hz}}$ |
| CMRR @ 60Hz                  | Input Common Mode Rejection Ratio                                                              | $V_{CM} = 1\text{V}_{P-P}$ , $R_L = 10\text{k}\Omega$ to $V_{CM}$                                                                |                 | -70  |                   | $\text{dB}$                  |
| PSRR+ @ 120Hz                | Power Supply Rejection Ratio - +V                                                              | $V_+$ , $V_- = \pm 1.2\text{V}$ and $\pm 2.5\text{V}$ ,<br>$V_{SOURCE} = 1\text{V}_{P-P}$ , $R_L = 10\text{k}\Omega$ to $V_{CM}$ |                 | -64  |                   | $\text{dB}$                  |
| PSRR- @ 120Hz                | Power Supply Rejection Ratio - -V                                                              | $V_+$ , $V_- = \pm 1.2\text{V}$ and $\pm 2.5\text{V}$ ,<br>$V_{SOURCE} = 1\text{V}_{P-P}$ , $R_L = 10\text{k}\Omega$ to $V_{CM}$ |                 | -85  |                   | $\text{dB}$                  |
| <b>TRANSIENT RESPONSE</b>    |                                                                                                |                                                                                                                                  |                 |      |                   |                              |
| SR                           | Slew Rate                                                                                      |                                                                                                                                  |                 | 0.1  |                   | $\text{V}/\mu\text{s}$       |
| $t_r$ , $t_f$ , Large Signal | Rise Time, 10% to 90%, $V_{OUT}$                                                               | $A_V = +2$ , $V_{OUT} = 1\text{V}_{P-P}$ , $R_g = R_f = 10\text{k}\Omega$ ,<br>$R_L = 10\text{k}\Omega$ to $V_{CM}$              |                 | 10   |                   | $\mu\text{s}$                |
|                              | Fall Time, 90% to 10%, $V_{OUT}$                                                               | $A_V = +2$ , $V_{OUT} = 1\text{V}_{P-P}$ , $R_g = R_f = 10\text{k}\Omega$ ,<br>$R_L = 10\text{k}\Omega$ to $V_{CM}$              |                 | 9    |                   | $\mu\text{s}$                |
| $t_r$ , $t_f$ , Small Signal | Rise Time, 10% to 90%, $V_{OUT}$                                                               | $A_V = +2$ , $V_{OUT} = 10\text{mV}_{P-P}$ ,<br>$R_g = R_f = R_L = 10\text{k}\Omega$ to $V_{CM}$                                 |                 | 650  |                   | $\text{ns}$                  |
|                              | Fall Time, 90% to 10%, $V_{OUT}$                                                               | $A_V = +2$ , $V_{OUT} = 10\text{mV}_{P-P}$ ,<br>$R_g = R_f = R_L = 10\text{k}\Omega$ to $V_{CM}$                                 |                 | 640  |                   | $\text{ns}$                  |
| $t_{\overline{\text{EN}}}$   | Enable to Output Turn-on Delay Time, 10% $\overline{\text{EN}}$ to 10% $V_{OUT}$ , (ISL28168)  | $V_{\overline{\text{EN}}} = 5\text{V}$ to $0\text{V}$ , $A_V = +2$ ,<br>$R_g = R_f = R_L = 1\text{k}\Omega$ to $V_{CM}$          |                 | 15   |                   | $\mu\text{s}$                |
|                              | Enable to Output Turn-off Delay Time, 10% $\overline{\text{EN}}$ to 10% $V_{OUT}$ , (ISL28168) | $V_{\overline{\text{EN}}} = 0\text{V}$ to $5\text{V}$ , $A_V = +2$ ,<br>$R_g = R_f = R_L = 1\text{k}\Omega$ to $V_{CM}$          |                 | 0.5  |                   | $\mu\text{s}$                |

NOTE:

7. Compliance to datasheet limits is assured by one or more methods: production test, characterization and/or design.

**Typical Performance Curves**  $V_+ = 5V$ ,  $V_- = 0V$ ,  $V_{CM} = 2.5V$ ,  $R_L = \text{Open}$

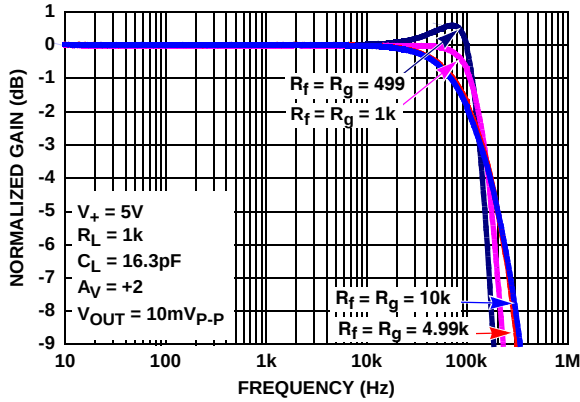


FIGURE 1. GAIN vs FREQUENCY vs FEEDBACK RESISTOR VALUES  $R_f/R_g$

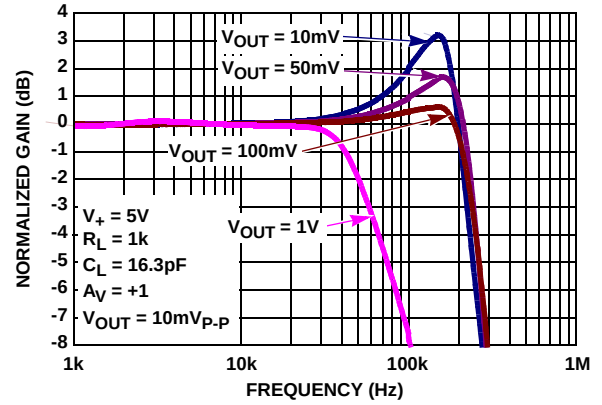


FIGURE 2. GAIN vs FREQUENCY vs  $V_{OUT}$ ,  $R_L = 1k$

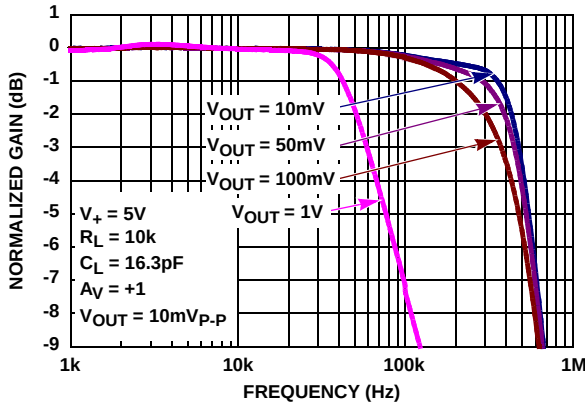


FIGURE 3. GAIN vs FREQUENCY vs  $V_{OUT}$ ,  $R_L = 10k$

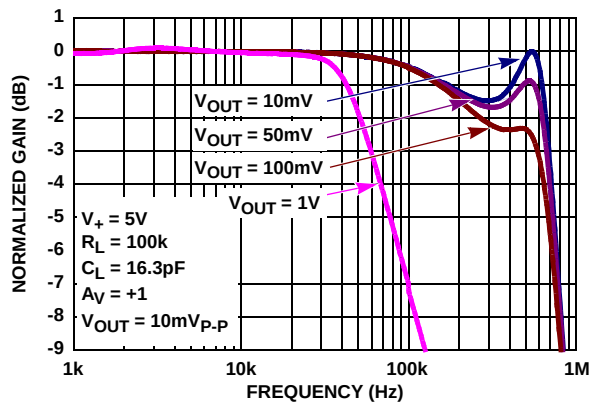


FIGURE 4. GAIN vs FREQUENCY vs  $V_{OUT}$ ,  $R_L = 100k$

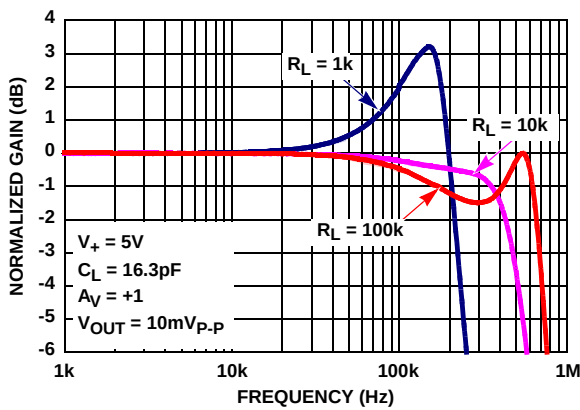


FIGURE 5. GAIN vs FREQUENCY vs  $R_L$

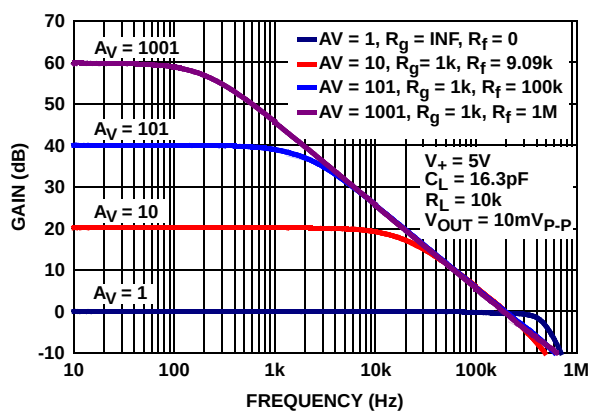


FIGURE 6. FREQUENCY RESPONSE vs CLOSED LOOP GAIN

**Typical Performance Curves**  $V_+ = 5V$ ,  $V_- = 0V$ ,  $V_{CM} = 2.5V$ ,  $R_L = \text{Open}$  (Continued)

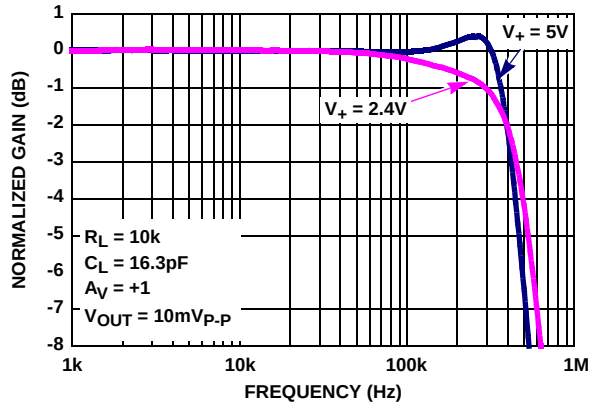


FIGURE 7. GAIN vs FREQUENCY vs SUPPLY VOLTAGE

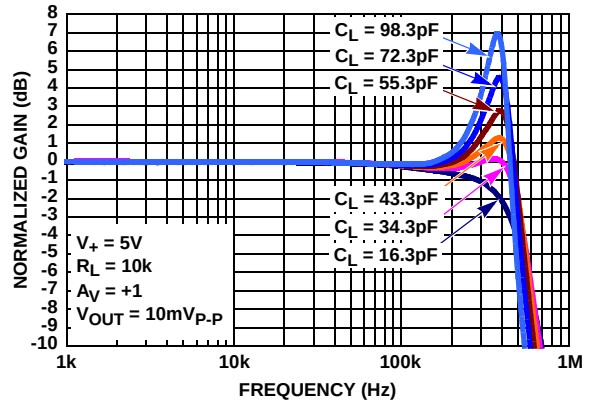


FIGURE 8. GAIN vs FREQUENCY vs  $C_L$

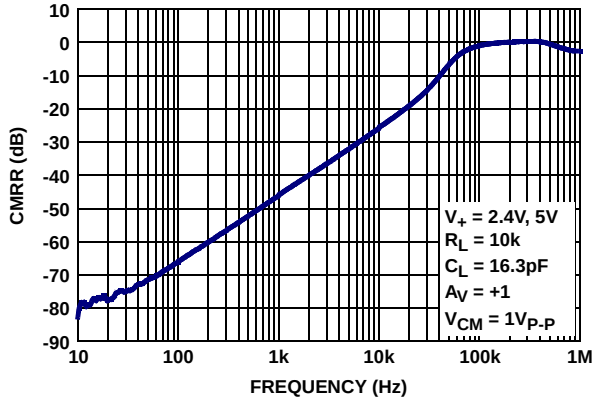


FIGURE 9. CMRR vs FREQUENCY,  $V_+ = 2.4V$  AND  $5V$

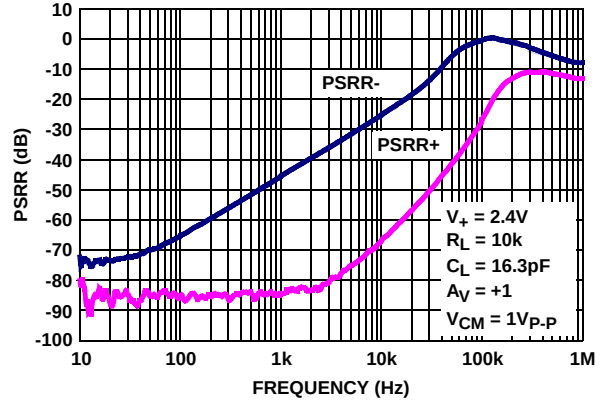


FIGURE 10. PSRR vs FREQUENCY,  $V_+$ ,  $V_- = \pm 1.2V$

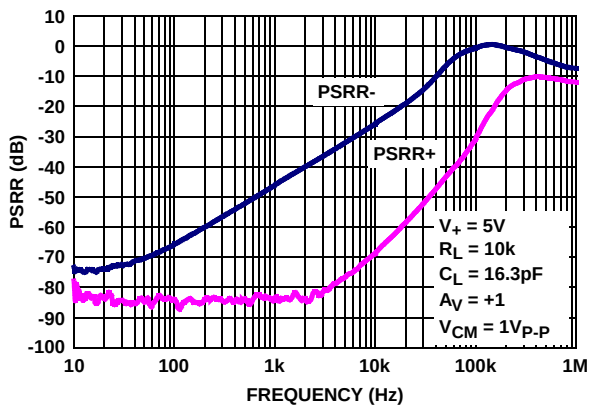


FIGURE 11. PSRR vs FREQUENCY,  $V_+$ ,  $V_- = \pm 1.2V$

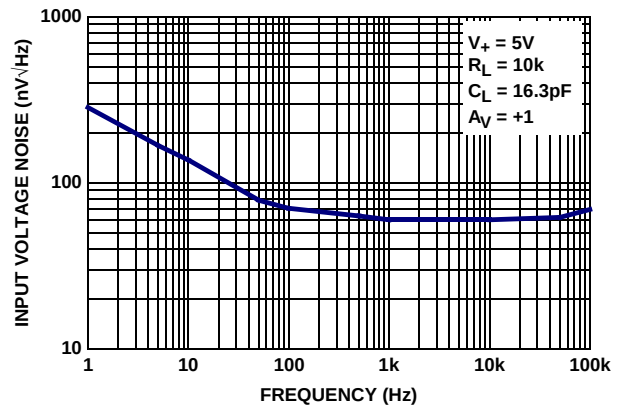


FIGURE 12. INPUT VOLTAGE NOISE DENSITY vs FREQUENCY

**Typical Performance Curves**  $V_+ = 5V$ ,  $V_- = 0V$ ,  $V_{CM} = 2.5V$ ,  $R_L = \text{Open}$  (Continued)

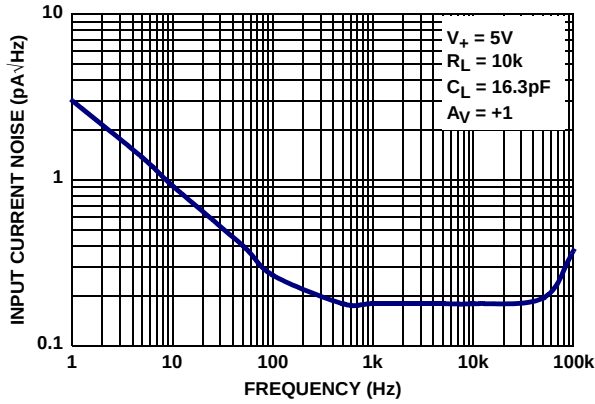


FIGURE 13. INPUT CURRENT NOISE DENSITY vs FREQUENCY

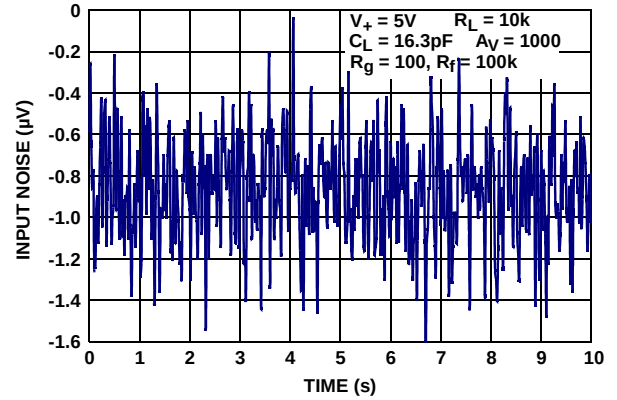


FIGURE 14. INPUT VOLTAGE NOISE 0.1Hz TO 10Hz

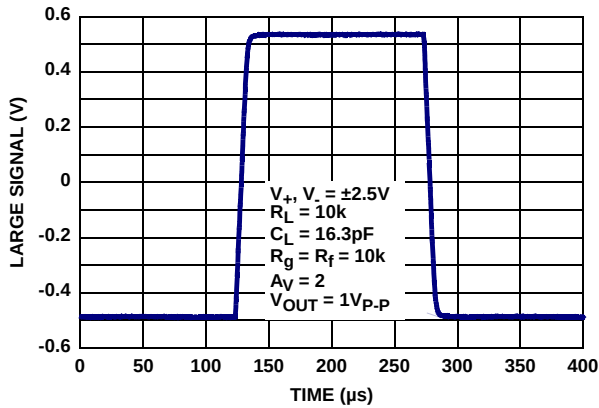


FIGURE 15. LARGE SIGNAL STEP RESPONSE

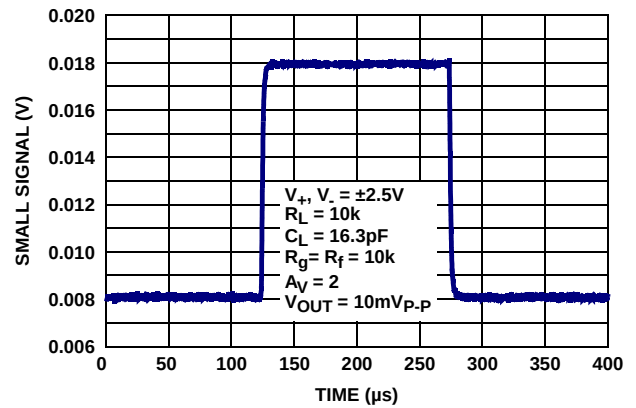


FIGURE 16. SMALL SIGNAL STEP RESPONSE

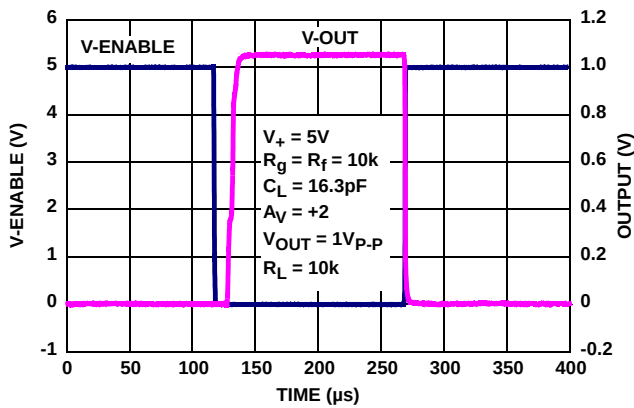


FIGURE 17. ISL28168 ENABLE TO OUTPUT RESPONSE

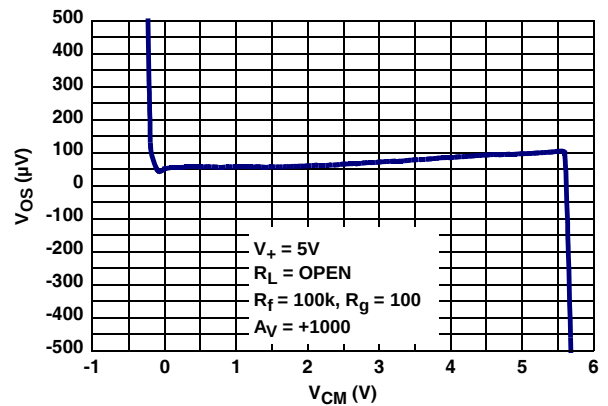


FIGURE 18. INPUT OFFSET VOLTAGE vs COMMON MODE INPUT VOLTAGE



**Typical Performance Curves**  $V_+ = 5V$ ,  $V_- = 0V$ ,  $V_{CM} = 2.5V$ ,  $R_L = \text{Open}$  (Continued)

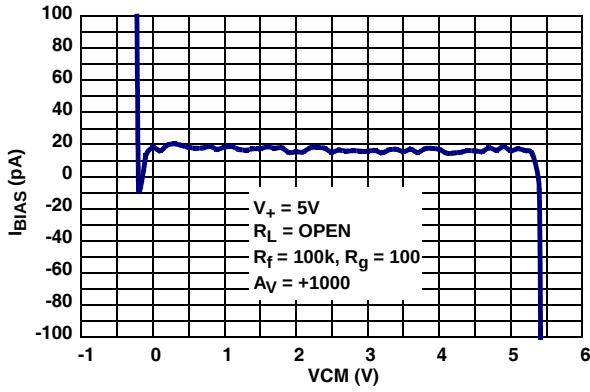


FIGURE 19. INPUT BIAS CURRENT vs COMMON MODE INPUT VOLTAGE

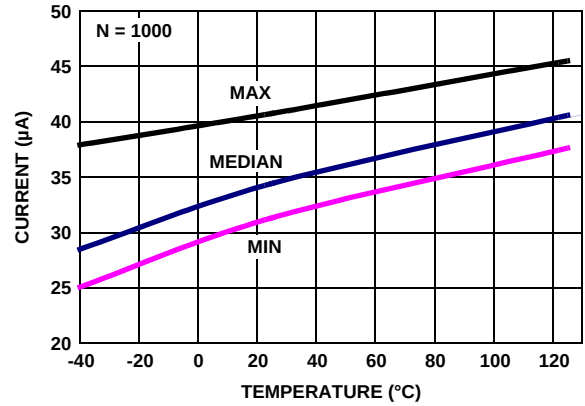


FIGURE 20. SUPPLY CURRENT ENABLED vs TEMPERATURE,  $V_+$ ,  $V_- = \pm 2.5V$

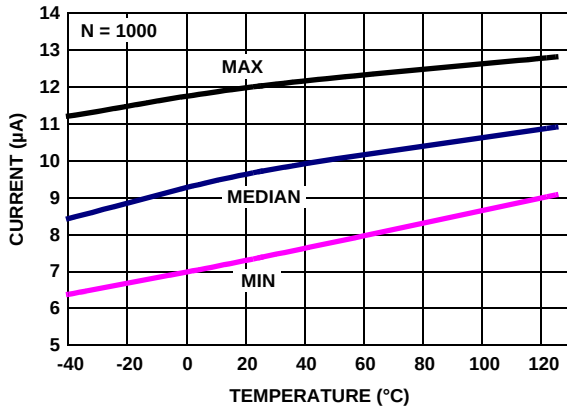


FIGURE 21. SUPPLY CURRENT DISABLED vs TEMPERATURE,  $V_+$ ,  $V_- = \pm 2.5V$

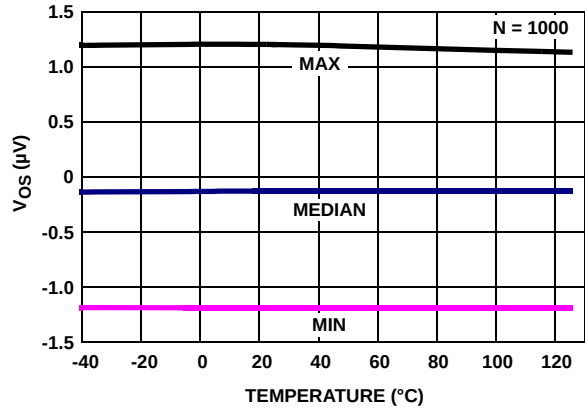


FIGURE 22.  $V_{OS}$  (SOT PKG) vs TEMPERATURE,  $V_{IN} = 0V$ ,  $V_+$ ,  $V_- = \pm 2.75V$

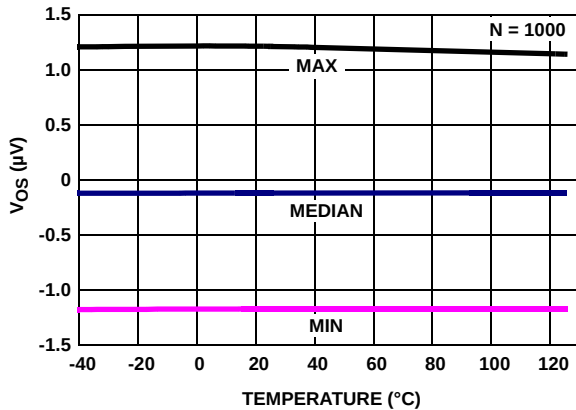


FIGURE 23.  $V_{OS}$  (SOT PKG) vs TEMPERATURE,  $V_{IN} = 0V$ ,  $V_+$ ,  $V_- = \pm 2.5V$

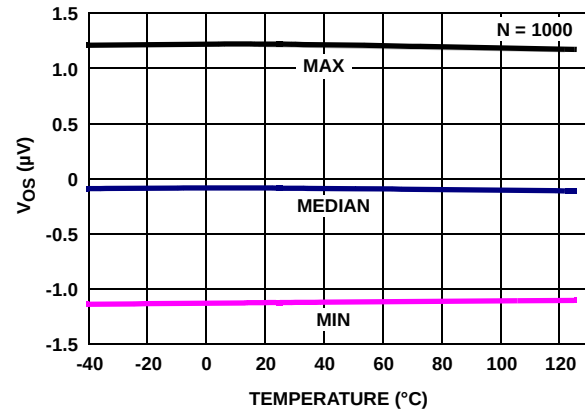


FIGURE 24.  $V_{OS}$  (SOT PKG) vs TEMPERATURE,  $V_{IN} = 0V$ ,  $V_+$ ,  $V_- = \pm 1.2V$

**Typical Performance Curves**  $V_+ = 5V$ ,  $V_- = 0V$ ,  $V_{CM} = 2.5V$ ,  $R_L = \text{Open}$  (Continued)

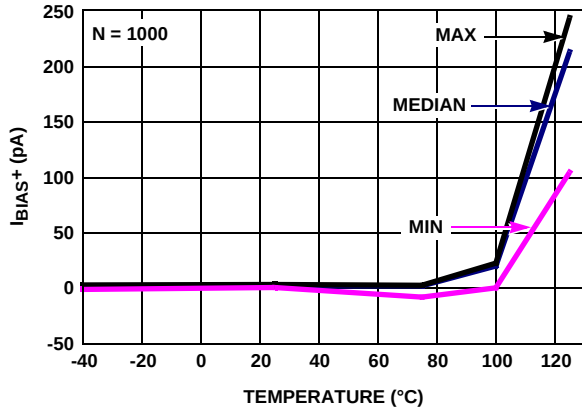


FIGURE 25.  $I_{BIAS+}$  vs TEMPERATURE,  $V_+$ ,  $V_- = \pm 2.5V$

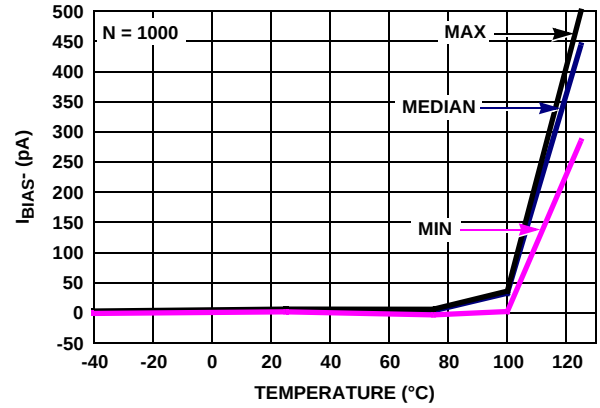


FIGURE 26.  $I_{BIAS-}$  vs TEMPERATURE,  $V_+$ ,  $V_- = \pm 2.5V$

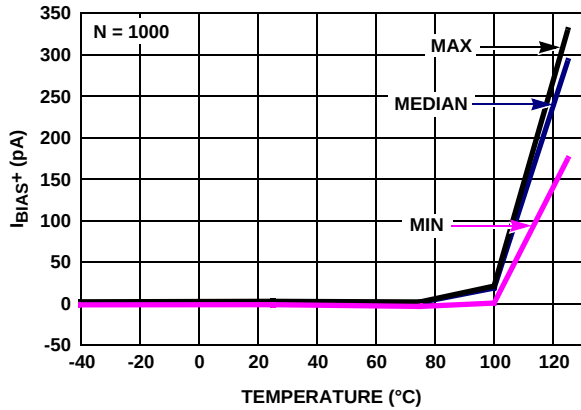


FIGURE 27.  $I_{BIAS+}$  vs TEMPERATURE,  $V_+$ ,  $V_- = \pm 1.2V$

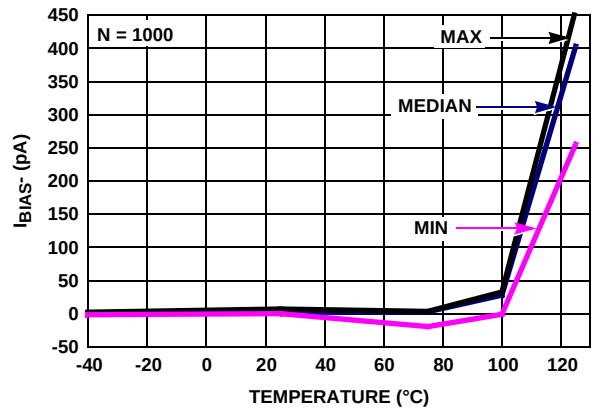


FIGURE 28.  $I_{BIAS-}$  vs TEMPERATURE,  $V_+$ ,  $V_- = \pm 1.2V$

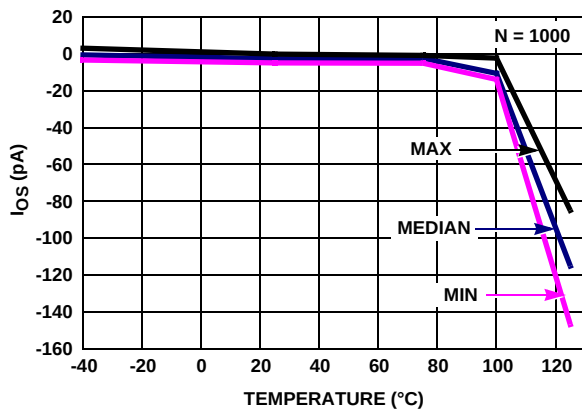


FIGURE 29.  $I_{OS}$  vs TEMPERATURE,  $V_+$ ,  $V_- = \pm 2.5V$

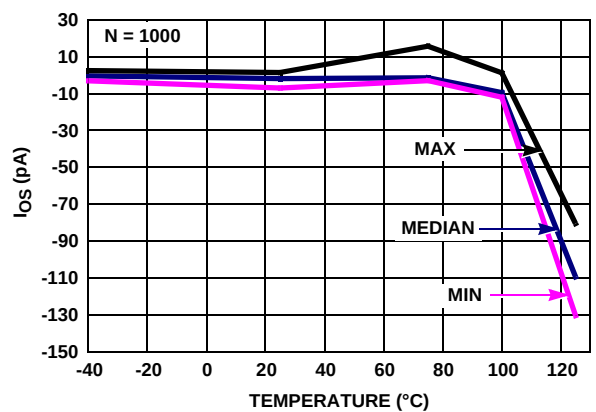


FIGURE 30.  $I_{OS}$  vs TEMPERATURE,  $V_+$ ,  $V_- = \pm 1.2V$

**Typical Performance Curves**  $V_+ = 5V$ ,  $V_- = 0V$ ,  $V_{CM} = 2.5V$ ,  $R_L = \text{Open}$  (Continued)

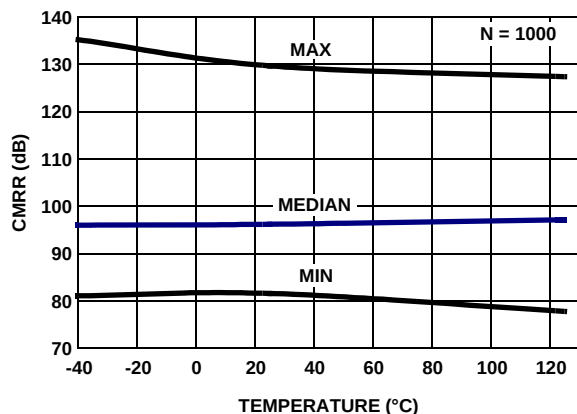


FIGURE 31. CMRR vs TEMPERATURE,  $V_{CM} = -2.5V$  TO  $+2.5V$ ,  $V_+$ ,  $V_- = \pm 2.5V$

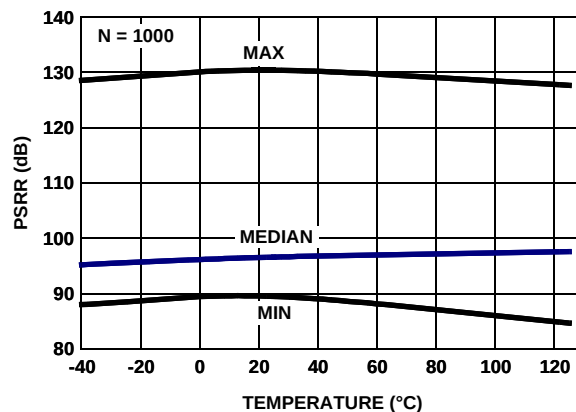


FIGURE 32. PSRR vs TEMPERATURE,  $V_+$ ,  $V_- = \pm 1.2V$  TO  $\pm 2.75V$

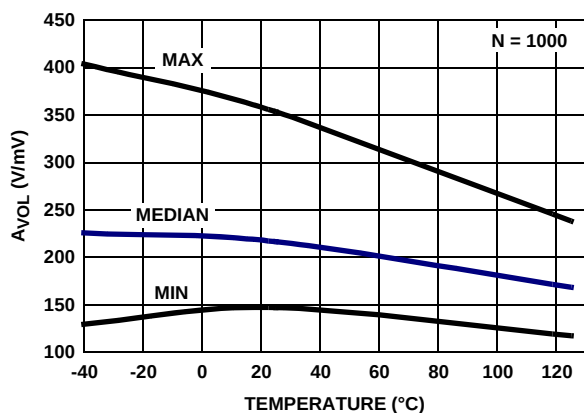


FIGURE 33.  $A_{VOL}$  vs TEMPERATURE,  $V_+$ ,  $V_- = \pm 2.5V$ ,  $V_O = -2V$  TO  $+2V$ ,  $R_L = 100k$

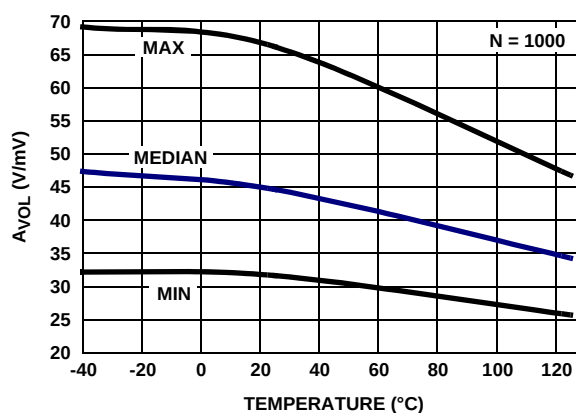


FIGURE 34.  $A_{VOL}$  vs TEMPERATURE,  $V_+$ ,  $V_- = \pm 2.5V$ ,  $V_O = -2V$  TO  $+2V$ ,  $R_L = 1k$

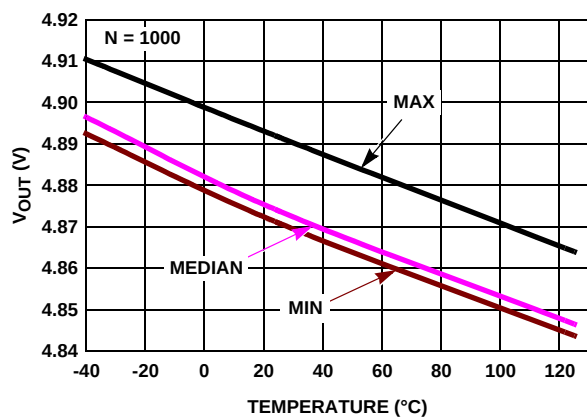


FIGURE 35.  $V_{OUT}$  HIGH vs TEMPERATURE,  $V_+$ ,  $V_- = \pm 2.5V$ ,  $R_L = 1k$

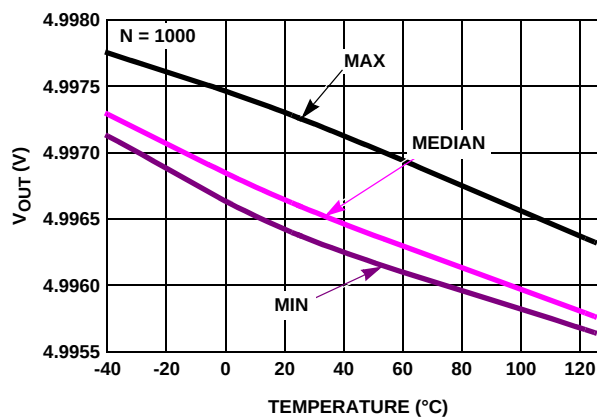


FIGURE 36.  $V_{OUT}$  HIGH vs TEMPERATURE,  $V_+$ ,  $V_- = \pm 2.5V$ ,  $R_L = 100k$

# **Typical Performance Curves** $V_+ = 5V$ , $V_- = 0V$ , $V_{CM} = 2.5V$ , $R_L = \text{Open}$ (Continued)

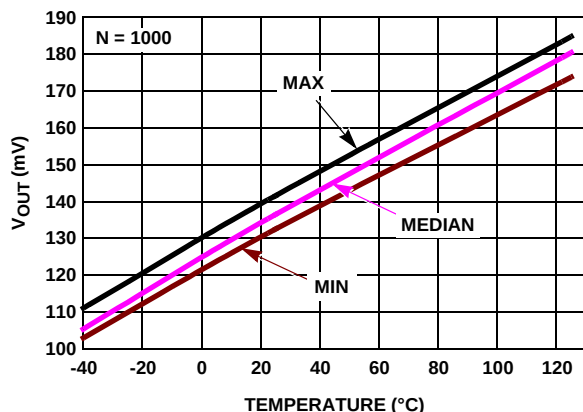


FIGURE 37.  $V_{OUT\ LOW}$  vs TEMPERATURE,  $V_+$ ,  $V_- = \pm 2.5V$ ,  $R_L = 1k$

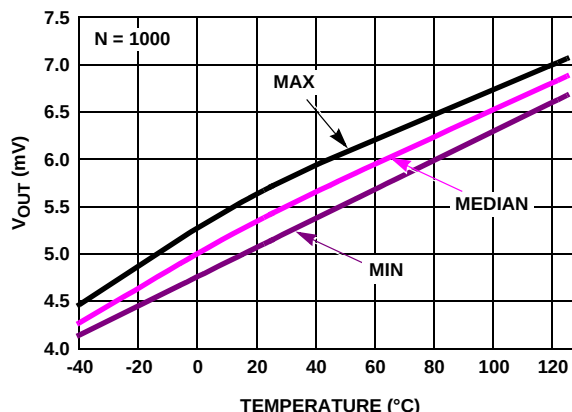


FIGURE 38.  $V_{OUT\ LOW}$  vs TEMPERATURE,  $V_+$ ,  $V_- = \pm 2.5V$ ,  $R_L = 100k$

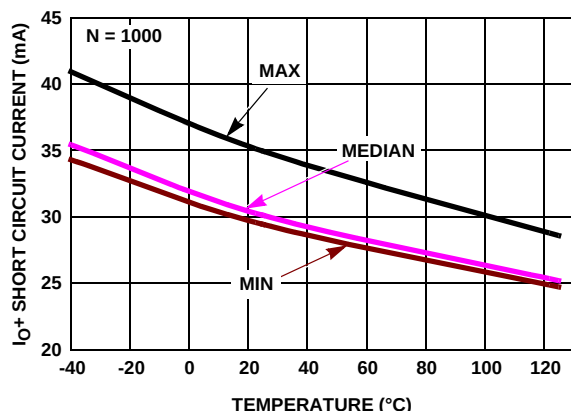


FIGURE 39.  $I_{O+}$  SHORT CIRCUIT OUTPUT CURRENT vs TEMPERATURE,  $V_{IN} = -2.55V$ ,  $R_L = 10k$ ,  $V_+$ ,  $V_- = \pm 2.5V$

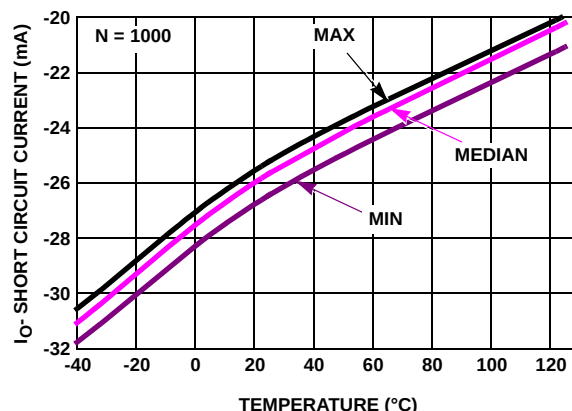


FIGURE 40.  $I_{O-}$  SHORT CIRCUIT OUTPUT CURRENT vs TEMPERATURE,  $V_{IN} = +2.55V$ ,  $R_L = 10k$ ,  $V_+$ ,  $V_- = \pm 2.5V$

## **Applications Information**

### **Introduction**

The ISL28168 is a single CMOS rail-to-rail input, output (RRIO) operational amplifier with an enable feature. The ISL28268 is a dual version without the enable feature. Both devices are designed to operate from single supply (2.4V to 5.5V) or dual supplies ( $\pm 1.2V$  to  $\pm 2.75V$ ).

### **Rail-to-Rail Input/Output**

Many rail-to-rail input stages use two differential input pairs, a long-tail PNP (or PFET) and an NPN (or NFET). Severe penalties have to be paid for this circuit topology. As the input signal moves from one supply rail to another, the operational amplifier switches from one input pair to the other causing drastic changes in input offset voltage and an undesired change in magnitude and polarity of input offset current.

The ISL28168 and ISL28268 achieve input rail-to-rail operation without sacrificing important precision specifications and degrading distortion performance. The devices' input offset voltage exhibits a smooth behavior throughout the entire common-mode input range. The input bias current versus the common-mode voltage range gives us an undistorted behavior from typically 100mV below the negative rail, and 0.25V higher than the  $V_+$  rail. The CMOS output stage features excellent drive capability, typically swinging to within 6mV of either rail with a 100k $\Omega$  load.

### **Results of Over-Driving the Output**

Caution should be used when over-driving the output for long periods of time. Over-driving the output can occur in two ways.

1. The input voltage times the gain of the amplifier exceeds the supply voltage by a large value

2. The output current required is higher than the output stage can deliver. These conditions can result in a shift in the Input Offset Voltage ( $V_{OS}$ ) as much as  $1\mu\text{V/hr}$  of exposure under these conditions.

### IN+ and IN- Input Protection

All input terminals have internal ESD protection diodes to both positive and negative supply rails, limiting the input voltage to within one diode beyond the supply rails. They also contain back-to-back diodes across the input terminals (see “Pin Descriptions” on page 2 - Circuit 1). For applications where the input differential voltage is expected to exceed  $0.5\text{V}$ , an external series resistor must be used to ensure the input currents never exceed  $5\text{mA}$  (see Figure 41).

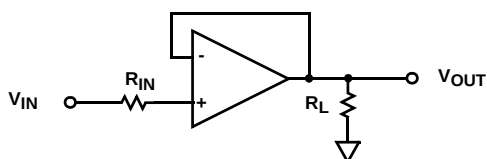


FIGURE 41. INPUT CURRENT LIMITING

### Enable/Disable Feature

The ISL28168 offers an  $\overline{\text{EN}}$  pin that disables the device when pulled up to at least  $2.0\text{V}$ . In the disabled state (output in a high impedance state), the part consumes typically  $10\mu\text{A}$  at room temperature. By disabling the part, multiple ISL28168 parts can be connected together as a MUX. In this configuration, the outputs are tied together in parallel and a channel can be selected by the  $\overline{\text{EN}}$  pin. The loading effects of the feedback resistors of the disabled amplifier must be considered when multiple amplifier outputs are connected together. Note that feed through from the IN+ to IN- pins occurs on any Mux Amp disabled channel where the input differential voltage exceeds  $0.5\text{V}$  (e.g., active channel  $V_{OUT} = 1\text{V}$ , while disabled channel  $V_{IN} = \text{GND}$ ), so the Mux implementation is best suited for small signal applications. If large signals are required, use series IN+ resistors, or large value  $R_F$  to keep the feed-through current low enough to minimize the impact on the active channel. See “Limitations of the Differential Input Protection” on page 13 for more details.

To disable the part, the user needs to supply the  $1.5\mu\text{A}$  required to pull the  $\overline{\text{EN}}$  pin to the  $V_+$  rail. If left open, the  $\overline{\text{EN}}$  pin will pull to the negative rail and the device will be enabled by default. If the  $\overline{\text{EN}}$  function is not required (no need to turn the part off), as a precaution, it is recommended that the user tie the  $\overline{\text{EN}}$  pin to the  $V_-$  pin.

### Limitations of the Differential Input Protection

If the input differential voltage is expected to exceed  $0.5\text{V}$ , an external current limiting resistor must be used to ensure the input current never exceeds  $5\text{mA}$ . For non inverting unity gain applications, the current limiting can be via a series IN+ resistor, or via a feedback resistor of appropriate value. For other gain configurations, the series IN+ resistor is the best

choice, unless the feedback ( $R_F$ ) and gain setting ( $R_G$ ) resistors are both sufficiently large to limit the input current to  $5\text{mA}$ .

Large differential input voltages can arise from several sources:

1. During open loop (comparator) operation. Used this way, the IN+ and IN- voltages don't track, so differentials arise.
2. When the amplifier is disabled but an input signal is still present. An  $R_L$  or  $R_G$  to GND keeps the IN- at GND, while the varying IN+ signal creates a differential voltage. Mux Amp applications are similar, except that the active channel  $V_{OUT}$  determines the voltage on the IN- terminal.
3. When the slew rate of the input pulse is considerably faster than the op amp's slew rate. If the  $V_{OUT}$  can't keep up with the IN+ signal, a differential voltage results, and visible distortion occurs on the input and output signals. To avoid this issue, keep the input slew rate below  $0.1\text{V}/\mu\text{s}$ , or use appropriate current limiting resistors.

Large ( $>2\text{V}$ ) differential input voltages can also cause an increase in disabled  $I_{CC}$ .

### Using Only One Channel

The ISL28268 is a dual op amp. If the application only requires one channel, the user must configure the unused channel to prevent it from oscillating. The unused channel will oscillate if the input and output pins are floating. This will result in higher than expected supply currents and possible noise injection into the channel being used. The proper way to prevent this oscillation is to short the output to the negative input and ground the positive input (as shown in Figure 42).




FIGURE 42. PREVENTING OSCILLATIONS IN UNUSED CHANNELS

### Proper Layout Maximizes Performance

To achieve the maximum performance of the high input impedance and low offset voltage, care should be taken in the circuit board layout. The PC board surface must remain clean and free of moisture to avoid leakage currents between adjacent traces. Surface coating of the circuit board will reduce surface moisture and provide a humidity barrier, reducing parasitic resistance on the board. When input leakage current is a concern, the use of guard rings around the amplifier inputs will further reduce leakage currents. Figure 43 shows a guard ring example for a unity gain amplifier that uses the low impedance amplifier output at the same voltage as the high impedance input to eliminate surface leakage. The guard ring does not need to be a specific width, but it should form a continuous loop around both inputs. For further reduction of leakage currents,

components can be mounted to the PC board using Teflon standoff insulators.

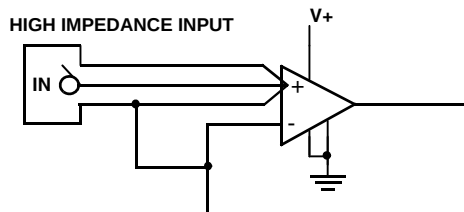


FIGURE 43. GUARD RING EXAMPLE FOR UNITY GAIN AMPLIFIER

### Current Limiting

These devices have no internal current-limiting circuitry. If the output is shorted, it is possible to exceed the Absolute Maximum Rating for output current or power dissipation, potentially resulting in the destruction of the device.

### Power Dissipation

It is possible to exceed the +125°C maximum junction temperatures under certain load and power-supply conditions. It is therefore important to calculate the maximum junction temperature ( $T_{JMAX}$ ) for all applications to determine if power supply voltages, load conditions, or package type need to be modified to remain in the safe operating area. These parameters are related in Equation 1:

$$T_{JMAX} = T_{MAX} + (\theta_{JA} \times PD_{MAXTOTAL}) \quad (EQ. 1)$$

where:

- $PD_{MAXTOTAL}$  is the sum of the maximum power dissipation of each amplifier in the package ( $PD_{MAX}$ )
- $PD_{MAX}$  for each amplifier can be calculated using Equation 2:

$$PD_{MAX} = 2 \times V_S \times I_{SMAX} + (V_S - V_{OUTMAX}) \times \frac{V_{OUTMAX}}{R_L} \quad (EQ. 2)$$

where:

- $T_{MAX}$  = Maximum ambient temperature
- $\theta_{JA}$  = Thermal resistance of the package
- $PD_{MAX}$  = Maximum power dissipation of 1 amplifier
- $V_S$  = Supply voltage (Magnitude of  $V_+$  and  $V_-$ )
- $I_{MAX}$  = Maximum supply current of 1 amplifier
- $V_{OUTMAX}$  = Maximum output voltage swing of the application

$R_L$  = Load resistance

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems. Intersil Corporation's quality certifications can be viewed at [www.intersil.com/design/quality](http://www.intersil.com/design/quality)

*Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)








## Package Outline Drawing

### M8.15E

#### 8 LEAD NARROW BODY SMALL OUTLINE PLASTIC PACKAGE

Rev 0, 08/09

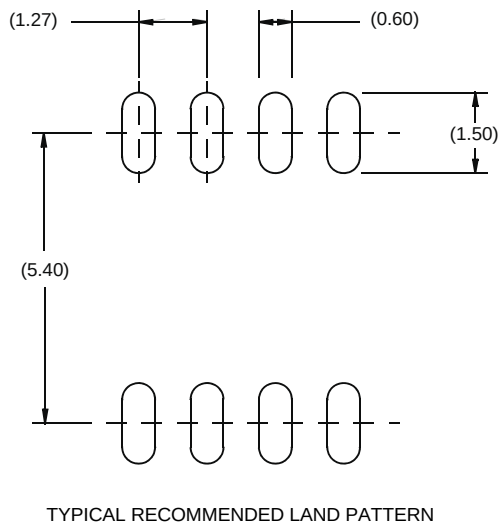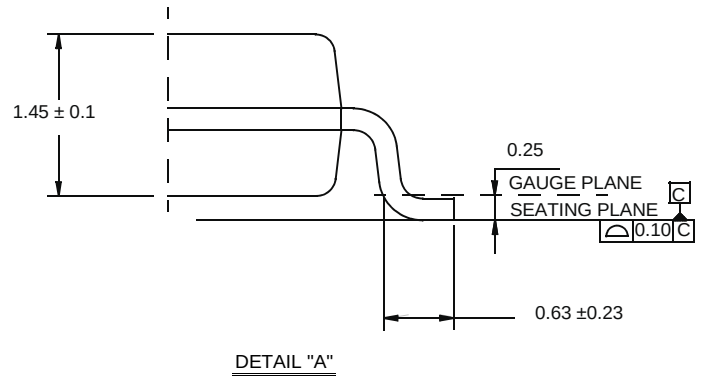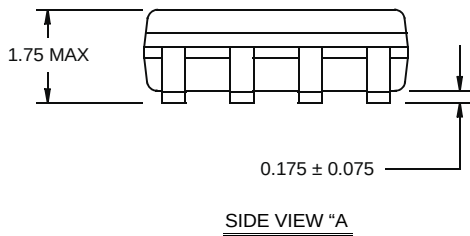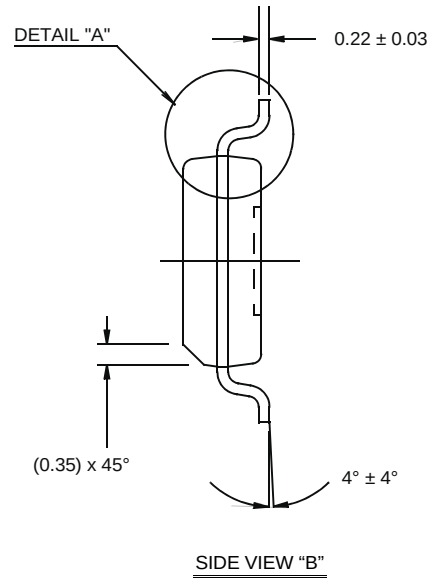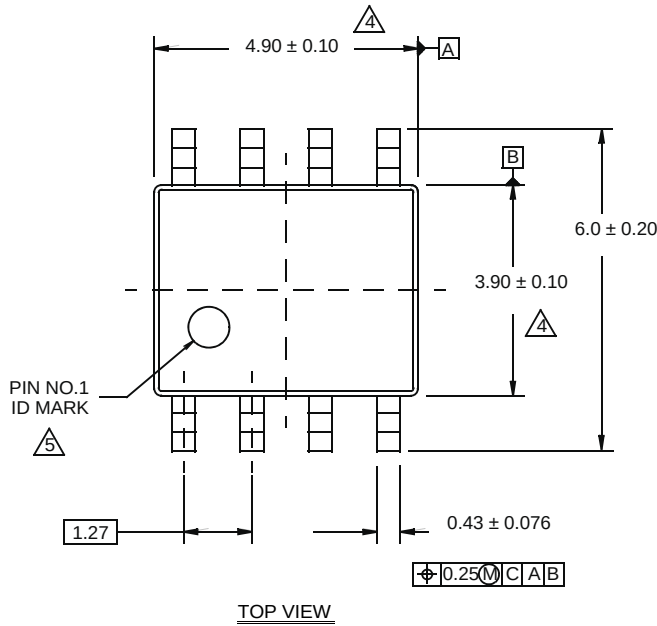

#### NOTES:

1. Dimensions are in millimeters.  
Dimensions in ( ) for Reference Only.
2. Dimensioning and tolerancing conform to AMSE Y14.5m-1994.
3. Unless otherwise specified, tolerance : Decimal  $\pm 0.05$
4. Dimension does not include interlead flash or protrusions.  
Interlead flash or protrusions shall not exceed 0.25mm per side.
5. The pin #1 identifier may be either a mold or mark feature.
6. Reference to JEDEC MS-012.




# Package Outline Drawing


## M8.118A

8 LEAD MINI SMALL OUTLINE PLASTIC PACKAGE (MSOP)


Rev 0, 9/09

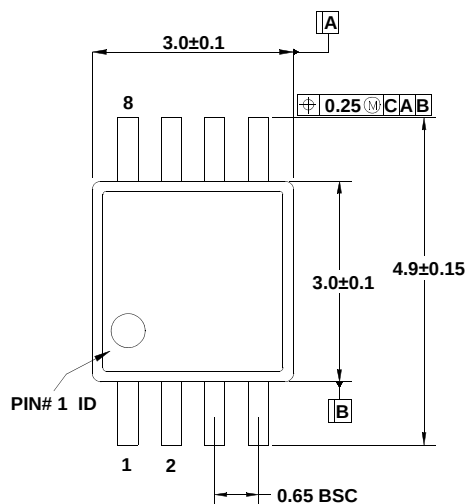


**TOP VIEW**

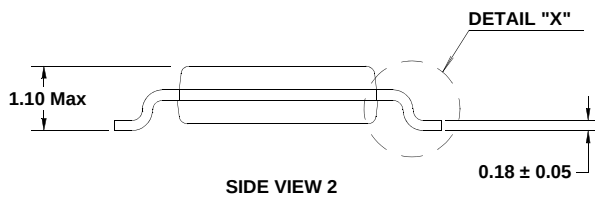


**SIDE VIEW 2**

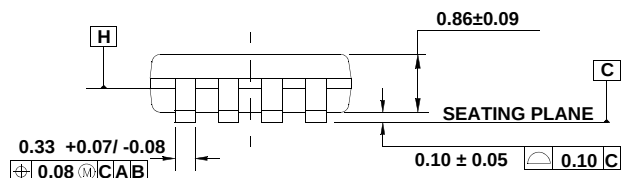

**SIDE VIEW 1**

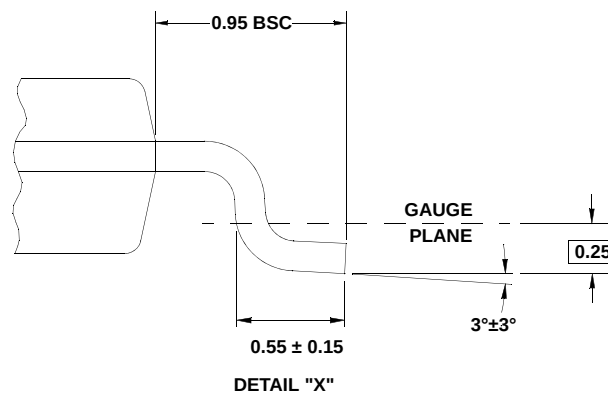

**DETAIL "X"**

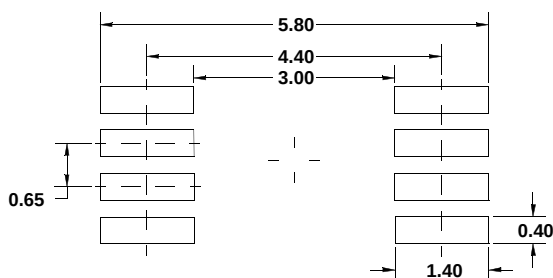

**TYPICAL RECOMMENDED LAND PATTERN**

### NOTES:

1. Dimensions are in millimeters.
2. Dimensioning and tolerancing conform to JEDEC MO-187-AA and AMSE Y14.5m-1994.
3. Plastic or metal protrusions of 0.15mm max per side are not included.
4. Plastic interlead protrusions of 0.25mm max per side are not included.
5. Dimensions "D" and "E1" are measured at Datum Plane "H".
6. This replaces existing drawing # MDP0043 MSOP 8L.