

SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE: 30 --- 100 V
CURRENT: 16 A


FEATURES

- ◇ Metal-Semiconductor junction with guard ring
- ◇ Epitaxial construction
- ◇ Low forward voltage drop, low switching losses
- ◇ High surge capability
- ◇ For use in low voltage, high frequency inverters free wheeling, and polarity protection applications
- ◇ The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- ◇ Case: JEDEC TO-220AB, molded plastic
- ◇ Terminals: Leads solderable per MIL-STD-750, Method 2026
- ◇ Polarity: As marked
- ◇ Weight: 0.08 ounce, 2.24 grams
- ◇ Mounting position: Any

TO-220AB

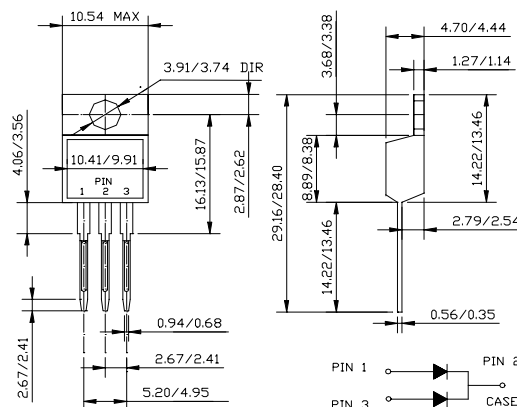

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase,half wave,60 Hz,resistive or inductive load. For capacitive load,derate by 20%.

		SBL 1630CT	SBL 1635CT	SBL 1640CT	SBL 1645CT	SBL 1650CT	SBL 1660CT	SBL 1680CT	SBL 16100CT	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	30	35	40	45	50	60	80	100	V
Maximum RMS voltage	V_{RMS}	21	25	28	32	35	42	56	70	V
Maximum DC blocking voltage	V_{DC}	30	35	40	45	50	60	80	100	V
Maximum average forward rectified current $T_C=95\text{ }^{\circ}\text{C}$	$I_{F(AV)}$	16								A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load $T_J=125^{\circ}\text{C}$	I_{FSM}	250								A
Maximum instantaneous forward voltage @ 8.0A	V_F	0.55				0.75		0.85		V
Maximum reverse current @ $T_C=25^{\circ}\text{C}$ at rated DC blocking voltage @ $T_C=100^{\circ}\text{C}$	I_R	0.5 50								mA
Typical thermal resistance (Note1)	$R_{\theta JC}$	2.0								$^{\circ}\text{C/W}$
Operating junction temperature range	T_J	-55--- + 150								$^{\circ}\text{C}$
Storage temperature range	T_{STG}	-55--- + 150								$^{\circ}\text{C}$

Note: 1. Thermal resistance junction to case.

www.galaxycn.com

FIG.1 – PEAK FORWARD SURGE CURRENT

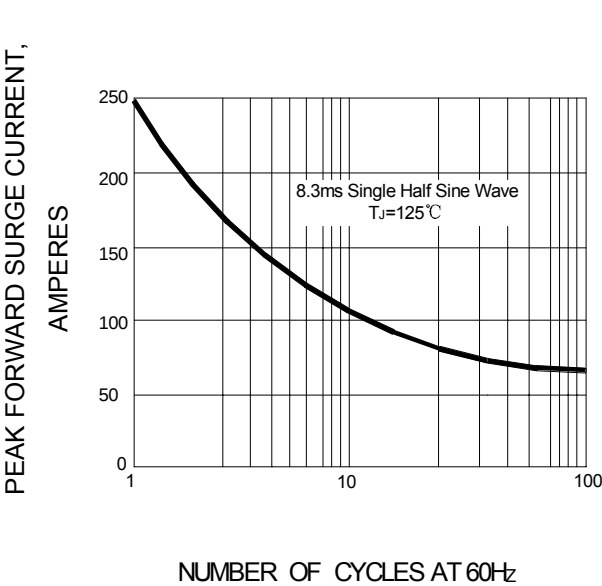


FIG.2 – FORWARD DERATING CURVE

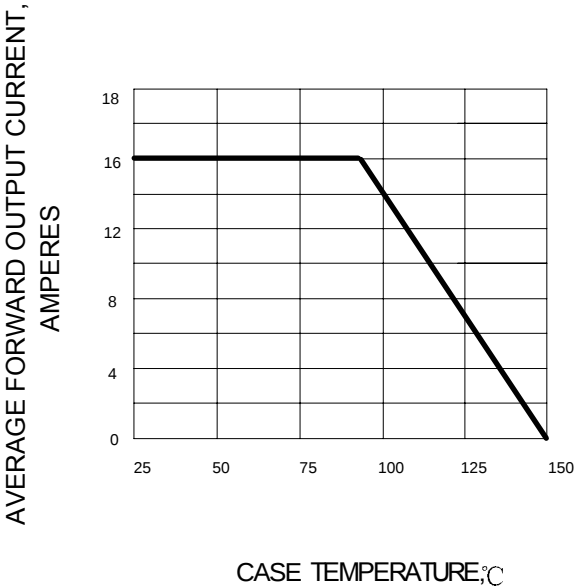


FIG.3 – TYPICAL FORWARD CHARACTERISTIC

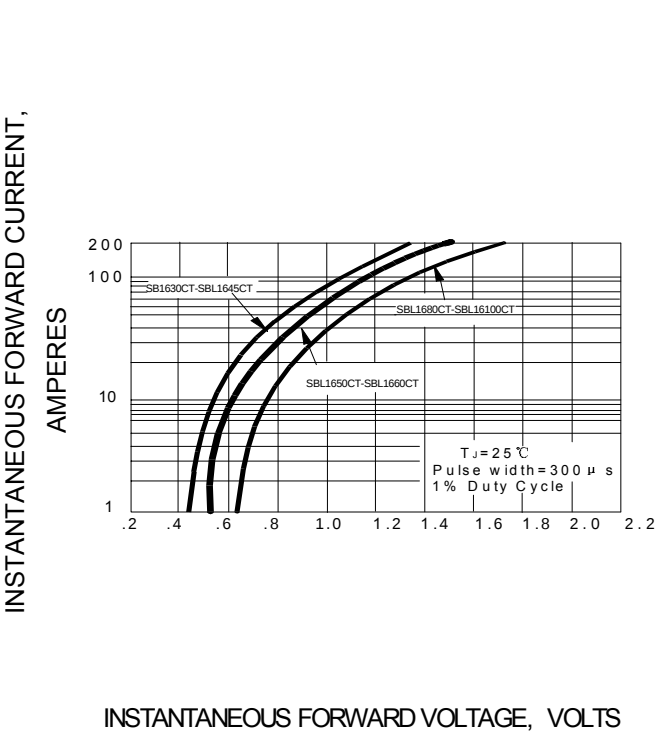


FIG.4 – TYPICAL REVERSE CHARACTERISTIC

