

Power Quality Products

TVSS Products

Straight Blade, 2 Pole, 3 Wire Grounding

15 and 20 Ampere, 125 Volts AC 60 Hz

Specification Grade and Hospital Grade

Surge Suppression Duplex and 4-PLEX® Receptacles

NEMA 5-15R
15A 125V
UL CSANEMA 5-20R
20A 125V
UL CSA

Circuit Guard®, Specification Grade Duplex Receptacles

Description	Color	Catalog Numbers	
Surge suppression receptacles with light, 240 joules/15000A per mode.	Blue	HBL5260SA	HBL5360SA
	Ivory	HBL5260ISA	HBL5360ISA
	Office White	HBL5260OWSA	HBL5360OWSA
Surge suppression receptacles with light and alarm, 240 joules/15000A per mode.	Blue	HBL5262SA	HBL5362SA
	Ivory	HBL5262ISA	HBL5362ISA
	Gray	HBL5262GYSA	HBL5362GYSA
	White	HBL5262WSA	HBL5362WSA
	Office White	HBL5262OWSA	HBL5362OWSA
Isolated ground, surge suppression receptacles with light and alarm, 240 joules/15000A per mode.	Blue	IG5262SA	IG5362SA
	Ivory	IG5262ISA	IG5362ISA
	Gray	IG5262GYSA	IG5362GYSA
	White	IG5262WSA	IG5362WSA
	Office White	IG5262OWSA	IG5362OWSA
4-PLEX surge suppression receptacles with lights. 80 joules/6500A per mode.	Blue	HBL415S	HBL420S
	Ivory	HBL415IS	HBL420IS

Circuit Guard, Hospital Grade Duplex Receptacles

Description	Color	Catalog Numbers	
Surge suppression receptacles with light and alarm, 240 joules/15000A per mode.	Blue	HBL8262SA	HBL8362SA
	Ivory	HBL8262ISA	HBL8362ISA
	Gray	HBL8262GYSA	HBL8362GYSA
	White	HBL8262WSA	HBL8362WSA
	Red	HBL8262RSA	HBL8362RSA
Isolated ground, surge suppression receptacles with light and alarm, 240 joules/15000A per mode.	Blue	IG8262SA	IG8362SA
	Ivory	IG8262ISA	IG8362ISA
	Gray	IG8262GYSA	IG8362GYSA
	White	IG8262WSA	IG8362WSA
	Orange	IG8262OSA	IG8362OSA
4-PLEX surge suppression receptacles with lights, 80 joules/6500A per mode.	Blue	—	HBL420HS
	Ivory	—	HBL420HIS

4-PLEX Accessories

Description	Color	Catalog Numbers
4-PLEX adapter plates for 1 and 2 gang, and 4" (101.6) square device boxes.	Blue	HBL4APBL
	Ivory	HBL4API
4-PLEX portable box. Portable 4" (101.6) square box with cord grip. Accepts up to .66" (16.8) diameter cord.	Ivory	HBL4PBI

Note: 4-PLEX box is not UL Listed.

Wall Plates

Configuration	High-Impact Nylon			Plated Steel	Stainless Steel (S/S)		
	Color	Standard	Mid-Size		Brass		
 1-gang	Blue	—	SPJ26C*	Chrome Brass	Smooth S/S	S26	 Smooth S/S Smooth Brass
	Blue	—	SPJ26		Smooth S/S	SJ26	
	Ivory	—	PJ26C*		Smooth S/S	SJ26	
	Ivory	—	PJ26C*		Smooth S/S	SJ26	
	Ivory	HPS1I	PJ26		Smooth S/S	SJ26	
	Gray	HPS1GY	PJ26G		Smooth S/S	SJ26	
	White	HPS1WA	PJ26W		Smooth S/S	SJ26	
	O White	HPS1OW	—		Smooth S/S	SJ26	
	Orange	IGHPS1**	—		Smooth S/S	SJ26	
	Red	HPS1R	PJ26R		Smooth S/S	SJ26	


Notes: *Premarked "COMPUTER ONLY." Lettering is block 1/4" high.

**Premarked "ISOLATED GROUND." Lettering is block 1/4" high.


▲ Jumbo size plate.

See Section A for technical data for 4-PLEX devices.


For technical information, see page J-19.

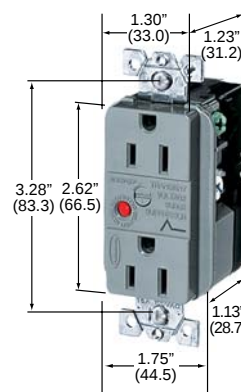


HBL5262GYSA

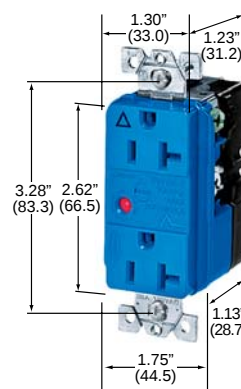

IG5362SA

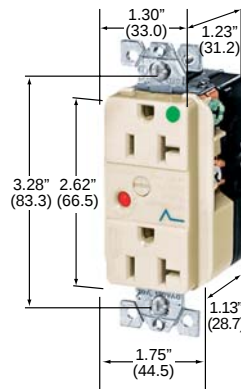

HBL8362ISA



HBL415S