
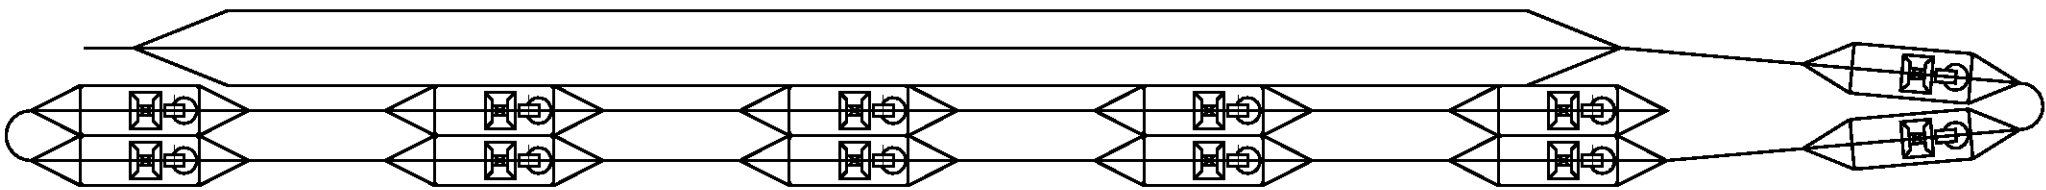


LOC	DIST	P	F	REVISIONS			DATE	APPD
				ZONE	LTR	DESCRIPTION		
CE	16				B	REVISED PER 0A00-0156-02	07MAR2002	TA/JS

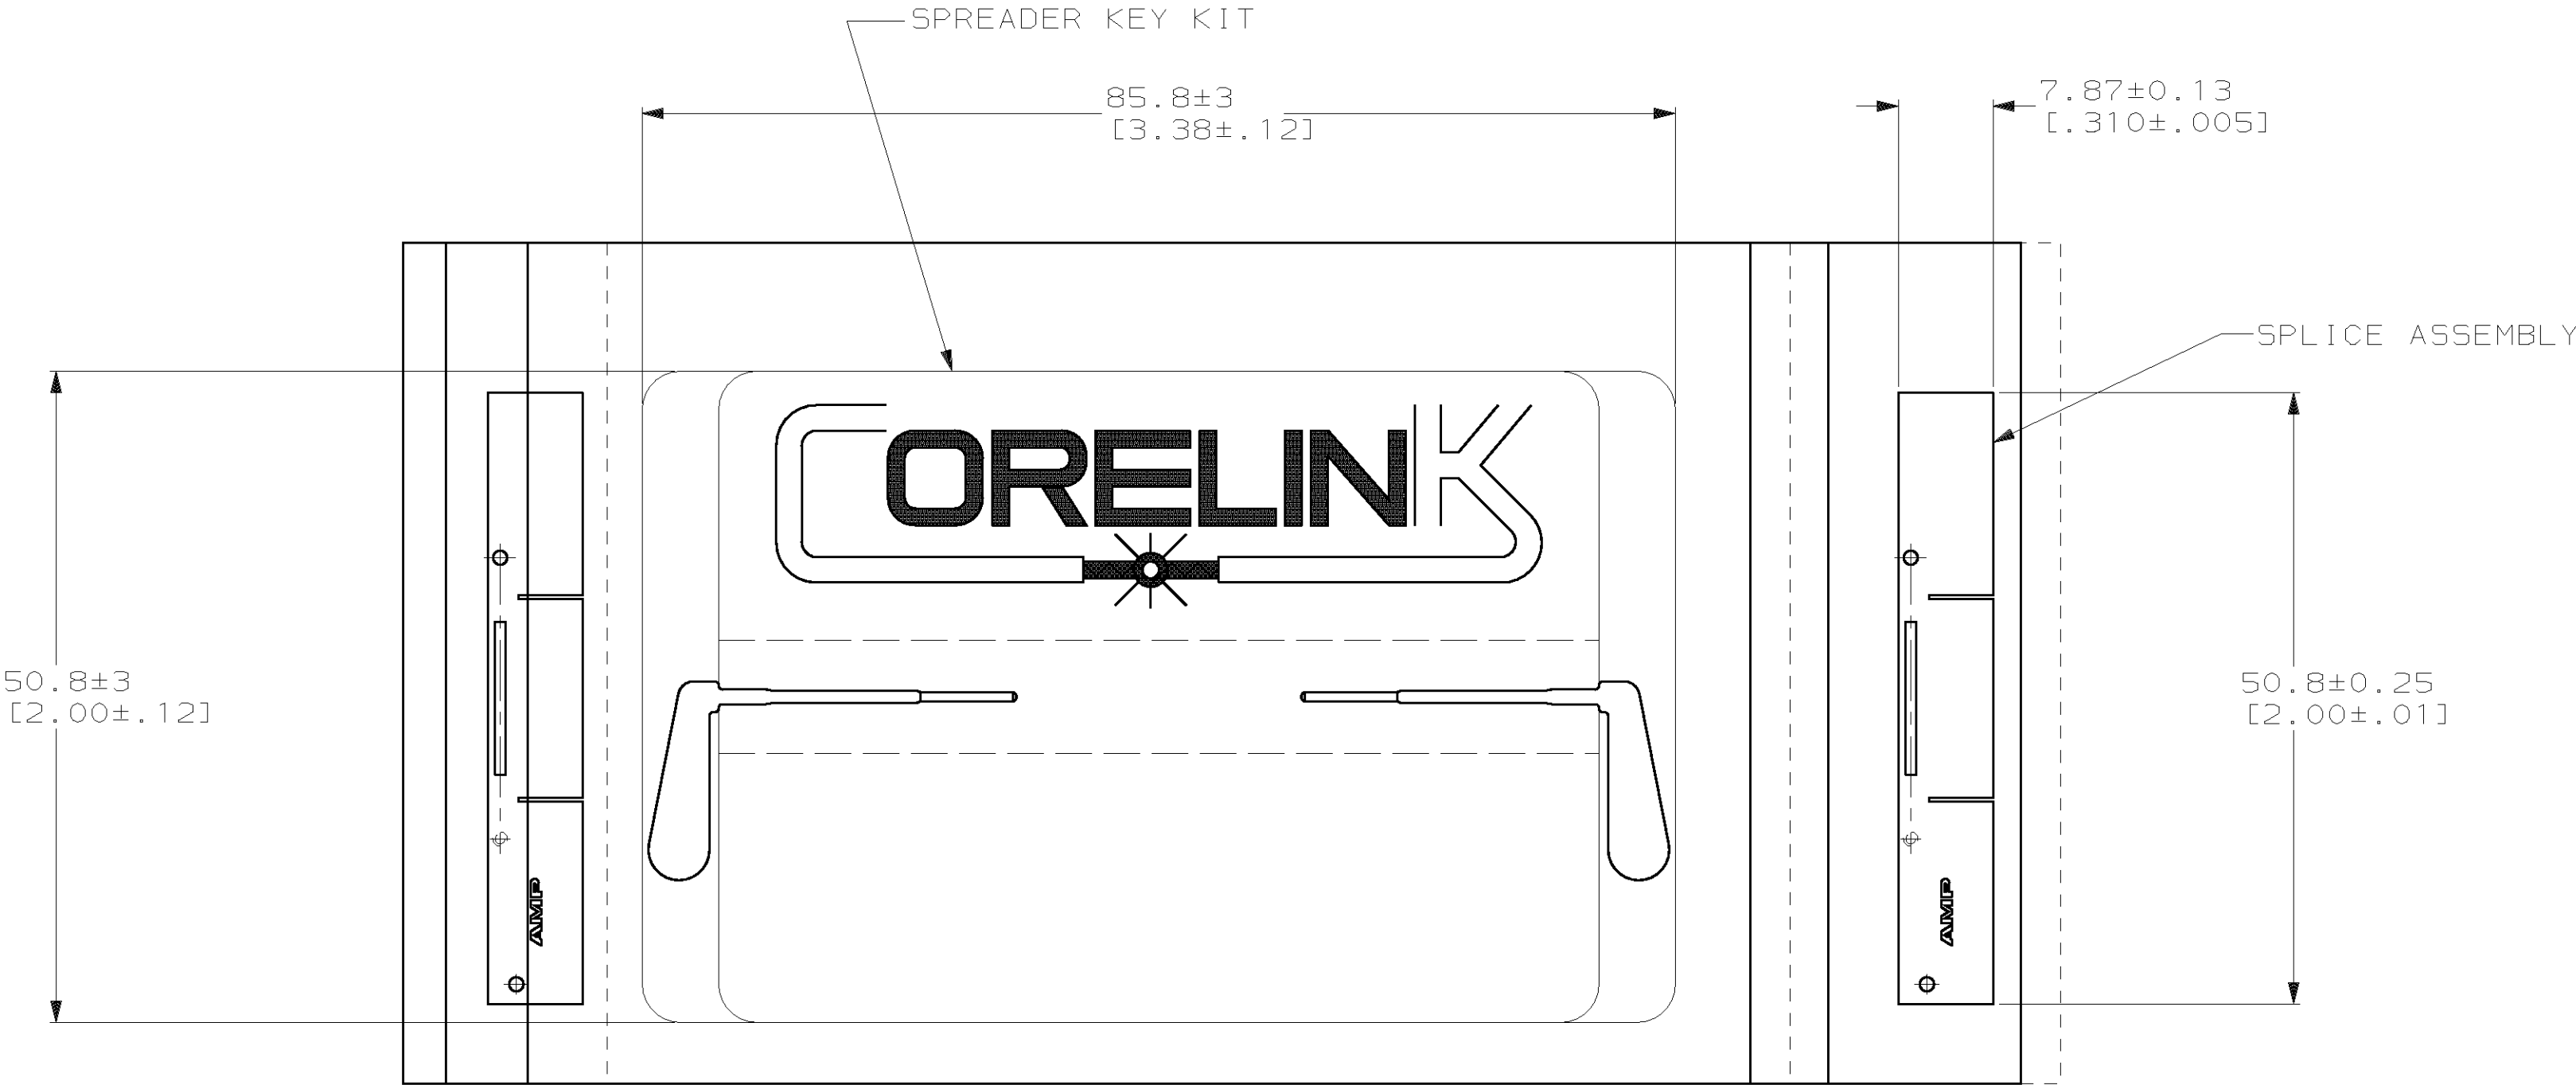

- 0.3 dB MAXIMUM INSERTION LOSS.
- TYPICAL LOSS 0.1 dB.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

503577-1					
PART NO					
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± - MATERIAL -			DR 2-18-94 B.BRIGGS CHK 2-18-94 B.BRIGGS APPD 2-21-94 D.STAKEM APPD 3-10-94 D.STAKEM PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		
FINISH -			AMP AMP Incorporated Harrisburg, PA 17105-3608		
			NAME CORELINK SPLICE KIT, 12 PACK		
			SIZE C	CAGE CODE 00779	DRAWING NO C-503577
			SCALE 2:1	SHEET 1 OF 1	