

Vitreous Enamelled Wirewound Resistors



W20 SERIES

- All welded construction
- High purity ceramic substrate
- Impervious lead free vitreous enamel coating
- High power dissipation for size
- High stability and reliability
- Suitable for harsh environments
- Overload characteristics ideal for protection circuits



Electrical Data



Commercial			W21	W215	W22	W23	W24
Power rating at 25°C	watts		3.0	5.0	7.0	10.0	14.0
Resistance range at	1% tolerance	ohms	1 to 10k	1 to 15k	1 to 22k	1 to 60k	1 to 100k
	2% tolerance	ohms	0.5 to 10k	0.5 to 15k	0.5 to 22k	1 to 60k	1 to 100k
	5% tolerance	ohms	0.1 to 10k	0.1 to 15k	0.1 to 22k	0.15 to 60k	0.2 to 100k
TCR (-55° to 200°C)	ppm/°C		Typically: <+75			Maximum: +200	

Approved BS CECC 40-201-002			Style	JB	HB	KB	LB	MB
Power rating at 25°C			watts	2.9	5.0	7.0	10.0	14.0
Power rating at 70°C			watts	2.5	4.3	6.0	9.0	12.0
Resistance range at	1% tolerance	ohms	1 to 10k	1 to 15k	1 to 20k	1 to 56k	1 to 100k	
	2% tolerance	ohms	0.5 to 10k	0.5 to 15k	0.5 to 20k	1 to 56k	1 to 100k	
	5% tolerance	ohms	0.1 to 10k	0.1 to 15k	0.1 to 20k	0.15 to 56k	0.2 to 100k	
TCR (-55° to 200°C)		ppm/°C	≥5 ohms < 10 ohms: ±400			≥10 ohms: ±200		

Applicable to commercial and approved ranges						
Limiting element voltage	volts	100	160	200	500	750
Standard values		E24 preferred. Other values to special order				
Thermal impedance	°C/watt	88	58	44	29	22
Ambient temperature range	°C	-55 to 200				

Physical Data

Dimensions (mm) & weight (g)					
Type	L max	D max	f min	d nom	Wt.nom
W21	12.7	5.6	22.75	0.8	1
W215	22.0	7.0	23.1	0.8	2
W22	22.0	8.0	23.1	0.8	2
W23	38.0	8.0	-	0.8	3.5
W24	53.5	8.0	-	0.8	5

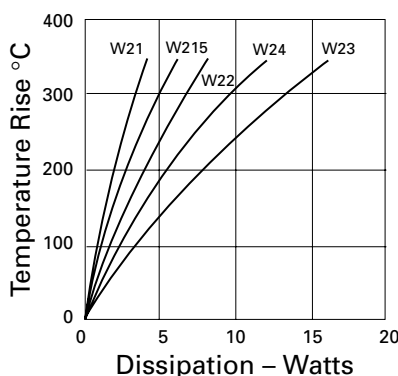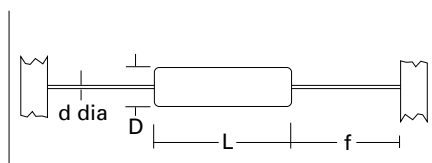

CONSTRUCTION

A high purity ceramic substrate is assembled with interference fit end caps to which are welded the termination wires. The resistive element is wound on the substrate and welded to the caps; the vitreous enamel protective coating is then applied.

TERMINATIONS

Material Copper clad steel wire, nickel plated and solder-coated.

Strength The terminations meet the requirements of IEC 68.2.21.

Solderability The terminations meet the requirements of IEC 115-1, Clause 4.17.3.2.

Length W23's and W24's are not supplied on tape.

Minimum lead length is 30 mm.

MARKING

The resistors are legend marked with type reference, resistance value and tolerance. Values are marked in accordance with IEC 62.

SOLVENT RESISTANCE

The body protection and marking are resistant to all normal industrial cleaning solvents suitable for printed circuits.

General Note

Welwyn Components reserves the right to make changes in product specification without notice or liability. All information is subject to Welwyn's own data and is considered accurate at time of going to print.

© Welwyn Components Limited

Bedlington, Northumberland NE22 7AA, England Tel: 01670 822181 Fax: 01670 829465 Web: <http://www.Welwyn-TT.co.uk>


Issue A 07/99

Performance Data

		CECC 40201-002	ACTUAL PERFORMANCE	
		Requirements	Maximum	Typical
Load at commercial rating: 1000 hrs at 25°C	$\Delta R\%$		5	3.5
Load at CECC rating: 1000 hours at 25°C	$\Delta R\%$	5	5	3.5
Dry heat: 1000 hours at 200°C	$\Delta R\%$	5	2	1
Shelf life: 12 months at room temperature	$\Delta R\%$	not specified	0.03	0.02
Derating		see derating curve		
Short term overload	$\Delta R\%$	1	1.0	0.2
Climatic	$\Delta R\%$	5	0.5	0.2
Climatic category	$\Delta R\%$	55/200/56		
Long term damp heat	$\Delta R\%$	5	0.05	0.02
Temperature rapid change	$\Delta R\%$	1	0.5	0.2
Resistance to solder heat	$\Delta R\%$	1	0.25	0.03
Vibration and bump	$\Delta R\%$	1	0.25	0.05
Noise (in decade of frequency)	$\mu V/V$	not specified	zero	zero
Robustness	$\Delta R\%$	1	0.4	0.05
Insulation resistance	Ohms	not specified	>.1G ohm	>.1G ohm
Voltage Proof	volts	not specified	500 min	500 min
Pulse handling data			available by request	

APPLICATION NOTES

The termination should not be bent closer than 1.6mm from the body, and the recommended minimum bend radius is 1.2mm. The terminations are solderable to within 4mm from the body. When cold, vitreous enamel has excellent insulation resistance. In common with all insulants the specific resistance of the enamel decreases with increase in temperature. Therefore, resistors operated at near maximum temperature cannot be classed as insulated and should not be used in contact with any conducting material. Care must be taken when determining clearance distance between

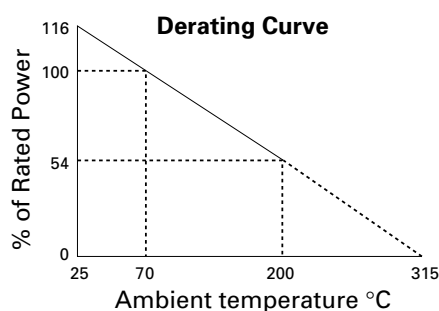


the resistor body and the printed circuit board or other components to ensure these are not over heated. Resistance is measured 6mm from body.

PACKAGING

For W21 and W215 the standard method of packaging is taped in Ammo Packs. For W22 the standard method of packaging is taped and reeled. Alternatives available by special request are detailed in the table below.

W23's and W24's are available only as loose packed in boxes. W series resistors can be supplied preformed. Contact factory for details.

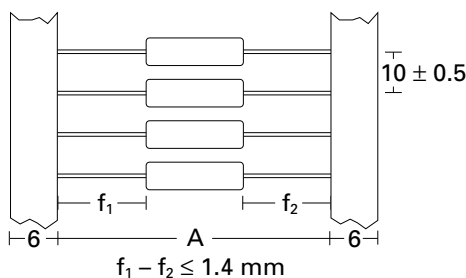

STANDARD QUANTITIES PER PACKAGE

Type	W21	W215	W22	W23	W24
Ammo Pack	1000	750	500	N/A	N/A
Reel	1000	750	700	N/A	N/A
Small Box	N/A	N/A	N/A	50	25

Type	A
W21	63±2
W215	73±2
W22	73±2