
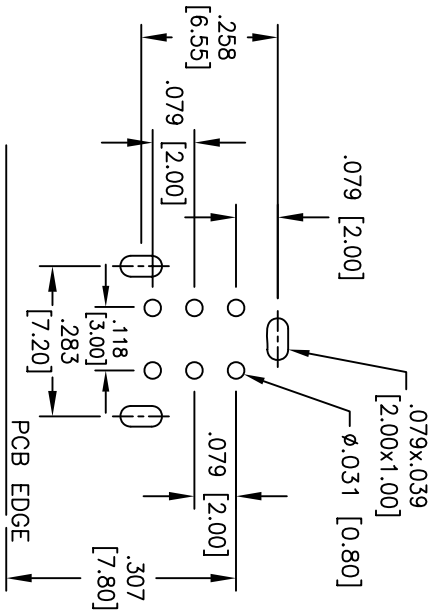
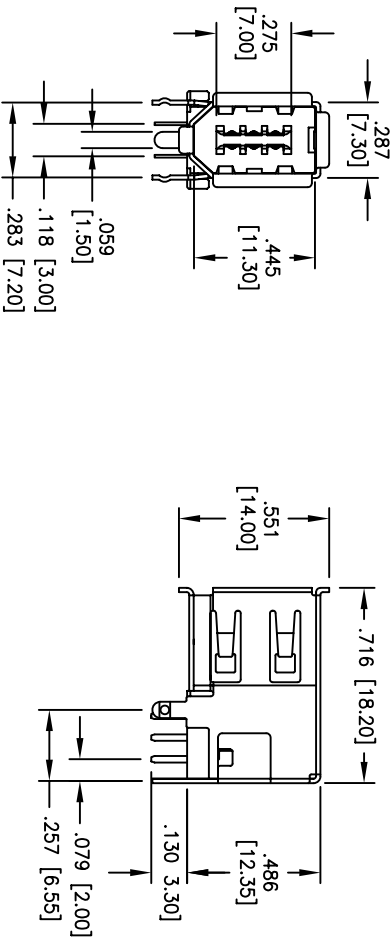


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/3/04	

APPROVED: _____

DATE: _____ TITLE: _____

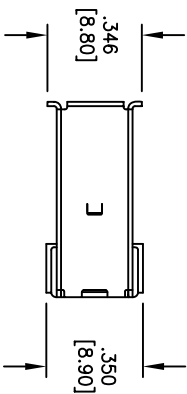

SPECIFICATIONS:

Material:

Insulator: PBT, Glass filled, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shell: Phosphor Bronze, nickel plated

Plating:

Gold flash over Nickel underplate on contact area, Tin over Copper underplate on PCB tails

Electrical:

Operating voltage: 250 VAC max.

Current rating: 1 Amp max.

Contact resistance: 30 mohms max.

Insulation resistance: 100 Mohms min. @ 500 VDC

Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE FIREWIRE (IEEE 1394)

SINGLE PORT, RIGHT ANGLE UPRIGHT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				HOLES			
X	± .10	ØX	± .10	X	± .10	ØX	± .10	X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .020	ØXX	± .015	.XX	± .015	ØXX	± .010
XXX	± .015	ØXXX	± .010	XXX	± .015	ØXXX	± .010	XXX	± .015	ØXXX	± .010
APPROVALS				DATE				TITLE			
DRAWN	SS			10/4/04				SIZE	PART NO.	FWC-C-S-RU	REV.
CHECKED								X			-
APPROVED								REF:	SCALE: NTS	SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ADAM TECH:

FWC-C-S-RU