

# Bridgelux ES Star Array Series

**Data Sheet DS 21 – Expiration date – 10 May 2011**

**BXRB – XXX0540-A, - XXX0740-A, - 40E0810-A, - 56C0700-A, - 56C1000-A**

## Introduction

The Bridgelux family of LED Array products delivers high performance, compact and cost-effective solid-state lighting solutions to serve the general lighting market. These products combine the higher efficacy, lifetime, and reliability benefits of LEDs with the light output levels of many conventional lighting sources. The Bridgelux ES Array Series has been specified to enable lamp and luminaire designs surpassing efficacy and quality of light requirements driven by regulatory standards with reasonable system design margins, enabling lighting product compliance to Energy Star, Title 24, Part L and other global standards.

The Bridgelux ES Array products provide a high performance alternative to conventional solid state solutions, delivering between 400 and 1000 lumens under application conditions in warm, neutral and cool white color temperatures. These compact high flux density light sources deliver uniform high quality illumination without pixilation or the multiple shadow effect caused by LED component based solutions. To simplify system design for appropriate light output, Bridgelux LED Arrays are specified to deliver performance under typical use conditions.

These integrated plug and play solutions reduce system complexity and enable miniaturized cost-effective lamp and luminaire designs. Lighting system designs incorporating these LED Arrays deliver comparable performance to that of 20-40 Watt incandescent and halogen, 7-18 Watt compact fluorescent, and 8-50 Watt HID based luminaires and feature increased system level efficacy and service life. Typical applications include replacement lamps, task, accent, spot, retail, track, down light, low bay, wide area, security, wall pack and street lighting.

## Features

- Compact high flux density light source
- Uniform high quality illumination
- Streamlined thermal path
- Energy Star / ANSI compliant binning structure
- More energy efficient than incandescent, halogen and fluorescent lamps
- Low voltage DC operation
- Instant light with unlimited dimming
- 5-year warranty
- RoHS compliant and Pb free

## Benefits

- Enhanced optical control
- Clean white light without pixilation
- Significantly reduced thermal resistance and increased operating temperatures
- Uniform consistent white light
- Lower operating costs
- Increased safety
- Easy to use with daylight and motion detectors to enable increased energy savings
- Reduced maintenance costs
- Environmentally friendly, no disposal issue



---

## Table of Contents

## Page

|                                                                            |    |
|----------------------------------------------------------------------------|----|
| Product Nomenclature                                                       | 3  |
| Average Lumen Maintenance Characteristics                                  | 3  |
| Environmental Compliance                                                   | 3  |
| UL Recognition                                                             | 4  |
| Minor Product Change Policy                                                | 4  |
| Cautionary Statements                                                      | 4  |
| Case Temperature Measurement Point                                         | 5  |
| Flux Characteristics                                                       | 6  |
| Optical Characteristics                                                    | 8  |
| Electrical Characteristics                                                 | 9  |
| Absolute Minimum and Maximum Ratings                                       | 10 |
| Typical Performance at Alternative Drive Currents                          | 11 |
| Mechanical Dimensions                                                      | 13 |
| Wavelength Characteristics at Rated Test Current, $T_j=25^{\circ}\text{C}$ | 15 |
| Typical Relative Luminous Flux vs. Current, $T_j=25^{\circ}\text{C}$       | 16 |
| Typical Light Output Characteristics vs. Temperature                       | 17 |
| Typical Chromaticity Characteristics vs. Temperature                       | 18 |
| Typical Forward Current Characteristics at $T_j = 25^{\circ}\text{C}$      | 19 |
| Product Binning                                                            | 20 |
| Color Binning Information                                                  | 21 |

---

## Product Nomenclature

The part number designation for Bridgelux LED Arrays is explained as follows:

BXRB – AB C DEFG – H – IJ - KLM

Where:

BXRB – Designates product family

AB – Designates the nominal ANSI color temperature; 27 = 2700K; 30 = 3000K, etc

C - Designates minimum CRI; A=60, C=70, E=80, G=90

DEFG - Designates Nominal Flux; 0400=400lm, 0800=800lm, 1200=1200lm, etc

H – Designates configuration

IJ – Designates CCT Bin options  
(3000K as an example)

00=Full ANSI - Q3, Q4, R3, R4;

Q1=2 bins - Q3+Q4;

Q3=Single bin - Q3 bin;

Q4=Single bin - Q4 bin;

03=3 SDCM

KLM – Designates wire option

## Average Lumen Maintenance Characteristics

Bridgelux projects that its family of LED Array products will deliver, on average, greater than 70% lumen maintenance after 50,000 hours of operation at the rated forward test current. This performance assumes constant current operation with case temperature maintained at or below 70°C. For use beyond these typical operating conditions please consult your Bridgelux sales representative for further assistance.

These projections are based on a combination of package test data, semiconductor chip reliability data, a fundamental understanding of package related degradation mechanisms, and performance observed from products installed in the field using Bridgelux die technology. Bridgelux conducts lumen maintenance tests per LM80. Observation of design limits is required in order to achieve this projected lumen maintenance.

## Environmental Compliance

Bridgelux is committed to providing environmentally friendly products to the solid-state lighting market. Bridgelux LED Arrays are compliant to the European Union directives on the restriction of hazardous substances in electronic equipment, namely the RoHS directive. Bridgelux will not intentionally add the following restricted materials to LED Array products: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

---

## UL Recognition

Bridgelux secures UL Recognition for all the LED Array products. We continue to add arrays as they are recognized by UL. Please refer to the UL file E333389 for the latest list of UL Recognized Arrays. Bridgelux uses UL Recognized materials with suitable flammability ratings in the LED Array to streamline the process for customers to secure UL listing of the final luminaire product. Bridgelux recommends that luminaires are designed with a Class 2 Driver to facilitate the UL listing process.

## Minor Product Change Policy

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

## Cautionary Statements

### **CAUTION: CONTACT WITH OPTICAL AREA**

Contact with the resin area should be avoided. Applying stress to the resin area can result in damage to the product.

### **CAUTION: EYE SAFETY**

Eye safety classification for the use of Bridgelux LED Arrays is in accordance with IEC – EN62471 Photobiological Safety of Lamps and Lamp Systems specification. Bridgelux LED Arrays are classified as Risk Group 1 (Low Risk) when operated at or below the rated test current. Please use appropriate precautions. It is important that employees working with LEDs are trained to use them safely.

### **CAUTION: RISK OF BURN**

Do not touch the LED Array or resin area during operation. Allow the LED Array to cool for a sufficient period of time before handling. The LED Array may reach elevated temperatures such that it can burn skin when touched.

---

## Case Temperature Measurement Point

A case temperature measurement point location is included on the top surface of the Bridgelux LED Arrays. The location of this measurement point is indicated in the mechanical dimensions section of this data sheet.

The purpose of this measurement point is to allow the user access to a measurement point closely linked to the true case temperature on the back surface of the LED Array. Once the LED Array is installed, it is challenging to measure the back surface of the array, or true case temperature. Measuring the top surface of the product can lead to inaccurate results due to the poor thermal conductivity of the top layers of the array such as the solder mask and other materials.

Bridgelux has provided the case temperature measurement location in a manner which closely ties it to the true case temperature of the LED Array under steady state operation. Deviations between thermal measurements taken at the point indicated and the back of the LED Array differ by less than 1 °C, providing a robust method to testing thermal operation once the product is installed.

---

## Quick Selection Guide

Table 1: Quick Selection Guide for ES Arrays

| Base Part Number  | CCT<br>(Nominal) | CRI<br>(min) | Typ<br>Flux<br>25°C<br>(lm) | Min<br>Flux<br>25°C<br>(lm) | Typ<br>Flux<br>60°C<br>(lm) | Current<br>(mA) | Vf<br>(Typ)<br>(V) | Power<br>(Typ)<br>(W) | Efficacy<br>(Typ at Tc<br>25°C)<br>(lm/W) |
|-------------------|------------------|--------------|-----------------------------|-----------------------------|-----------------------------|-----------------|--------------------|-----------------------|-------------------------------------------|
| BXRB-27E0540-A-00 | 2700             | 80           | 550                         | 500                         | 500                         | 365             | 17.2               | 7.0                   | 79                                        |
| BXRB-30E0540-A-00 | 3000             | 80           | 600                         | 540                         | 540                         | 365             | 17.2               | 7.0                   | 86                                        |
| BXRB-27G0540-A-00 | 2700             | 90           | 500                         | 450                         | 450                         | 365             | 17.2               | 7.0                   | 72                                        |
| BXRB-30G0540-A-00 | 3000             | 90           | 540                         | 490                         | 490                         | 365             | 17.2               | 7.0                   | 77                                        |
| BXRB-27E0740-A-00 | 2700             | 80           | 750                         | 680                         | 680                         | 350             | 25.7               | 10.0                  | 75                                        |
| BXRB-30E0740-A-00 | 3000             | 80           | 820                         | 740                         | 740                         | 350             | 25.7               | 10.0                  | 82                                        |
| BXRB-27G0740-A-00 | 2700             | 90           | 680                         | 610                         | 610                         | 350             | 25.7               | 10.0                  | 68                                        |
| BXRB-30G0740-A-00 | 3000             | 90           | 740                         | 670                         | 670                         | 350             | 25.7               | 10.0                  | 74                                        |
| BXRB-40E0810-A-00 | 4000             | 80           | 900                         | 810                         | 810                         | 350             | 25.7               | 10.0                  | 90                                        |
| BXRB-56C0700-A-00 | 5600             | 70           | 780                         | 700                         | 700                         | 365             | 17.2               | 7.0                   | 112                                       |
| BXRB-56C1000-A-00 | 5600             | 70           | 1070                        | 960                         | 960                         | 350             | 25.7               | 10.0                  | 107                                       |

## Flux Characteristics

Table 2: Flux Characteristics

| Color         | Part Number       | CRI (min) | Typ Luminous Flux (lm),<br>T <sub>c</sub> =60 °C <sup>[3]</sup> | Min Luminous Flux (lm),<br>T <sub>j</sub> =25 °C <sup>[1]</sup> | Typ Luminous Flux (lm),<br>T <sub>j</sub> =25 °C | Max Luminous Flux (lm),<br>T <sub>j</sub> =25 °C | Test Current (mA) <sup>[2]</sup> |
|---------------|-------------------|-----------|-----------------------------------------------------------------|-----------------------------------------------------------------|--------------------------------------------------|--------------------------------------------------|----------------------------------|
| Warm White    | BXRB-27E0540-A-00 | 80        | 500                                                             | 500                                                             | 550                                              | 610                                              | 365                              |
|               | BXRB-30E0540-A-00 | 80        | 540                                                             | 540                                                             | 600                                              | 660                                              | 365                              |
|               | BXRB-27G0540-A-00 | 90        | 450                                                             | 450                                                             | 500                                              | 550                                              | 365                              |
|               | BXRB-30G0540-A-00 | 90        | 490                                                             | 490                                                             | 540                                              | 600                                              | 365                              |
|               | BXRB-27E0740-A-00 | 80        | 680                                                             | 680                                                             | 750                                              | 830                                              | 350                              |
|               | BXRB-30E0740-A-00 | 80        | 740                                                             | 740                                                             | 820                                              | 900                                              | 350                              |
|               | BXRB-27G0740-A-00 | 90        | 610                                                             | 610                                                             | 679                                              | 750                                              | 350                              |
|               | BXRB-30G0740-A-00 | 90        | 670                                                             | 670                                                             | 740                                              | 810                                              | 350                              |
| Neutral White | BXRB-40E0810-A-00 | 80        | 810                                                             | 810                                                             | 900                                              | 1000                                             | 350                              |
| Cool White    | BXRB-56C0700-A-00 | 70        | 700                                                             | 700                                                             | 780                                              | 860                                              | 365                              |
|               | BXRB-56C1000-A-00 | 70        | 960                                                             | 960                                                             | 1070                                             | 1200                                             | 350                              |

Notes for Table 1:

1. Bridgelux maintains a  $\pm 7\%$  tolerance of flux measurements.
2. Parts are tested in pulsed conditions, T<sub>j</sub> = 25°C. Pulse width is 10 ms at rated test current.
3. Typical performance when driven with direct current using Bridgelux test set-up. Please contact a Bridgelux sales representative for additional details.

## Optical Characteristics

Table 3: Optical Characteristics

| Color         | Part Number       | Color Temperature (CCT) <sup>[1],[2],[3]</sup> |        |        | Minimum Color Rendering Index <sup>[4]</sup> | Typical Viewing Angle (Degrees) $2\theta_{\frac{1}{2}}$ <sup>[6]</sup> | Typical Center Beam Candle Power <sup>[5]</sup> (cd) |
|---------------|-------------------|------------------------------------------------|--------|--------|----------------------------------------------|------------------------------------------------------------------------|------------------------------------------------------|
|               |                   | Min                                            | Typ    | Max    |                                              |                                                                        |                                                      |
| Warm White    | BXRB-27E0540-A-00 | 2580 K                                         | 2725 K | 2870 K | 80                                           | 120                                                                    | 195                                                  |
|               | BXRB-30E0540-A-00 | 2870 K                                         | 3045 K | 3220 K | 80                                           | 120                                                                    | 210                                                  |
|               | BXRB-27G0540-A-00 | 2580 K                                         | 2725 K | 2870 K | 90                                           | 120                                                                    | 175                                                  |
|               | BXRB-30G0540-A-00 | 2870 K                                         | 3045 K | 3220 K | 90                                           | 120                                                                    | 190                                                  |
|               | BXRB-27E0740-A-00 | 2580 K                                         | 2725 K | 2870 K | 80                                           | 120                                                                    | 265                                                  |
|               | BXRB-30E0740-A-00 | 2870 K                                         | 3045 K | 3220 K | 80                                           | 120                                                                    | 285                                                  |
|               | BXRB-27G0740-A-00 | 2580 K                                         | 2725 K | 2870 K | 90                                           | 120                                                                    | 240                                                  |
|               | BXRB-30G0740-A-00 | 2870 K                                         | 3045 K | 3220 K | 90                                           | 120                                                                    | 260                                                  |
| Neutral White | BXRB-40E0810-A-00 | 3700K                                          | 4000K  | 4250K  | 80                                           | 120                                                                    | 320                                                  |
| Cool White    | BXRB-56C0700-A-00 | 5310 K                                         | 5665 K | 6020 K | 70                                           | 120                                                                    | 275                                                  |
|               | BXRB-56C1000-A-00 | 5310 K                                         | 5665 K | 6020 K | 70                                           | 120                                                                    | 380                                                  |

Notes for Table 3:

1. Parts are tested in pulsed conditions,  $T_j = 25^\circ\text{C}$ . Pulse width is 10 ms at rated test current.
2. Refer to Flux Characteristic Table for test current data.
3. Product is binned for color in x y coordinates.
4. Higher CRI options available upon request.
5. Center beam candle power is a calculated value based on lambertian radiation pattern at nominal test current (365mA).
6. Viewing angle is the off axis angle from the centerline where  $I_v$  is  $\frac{1}{2}$  of the peak value.

## Electrical Characteristics

Table 4: Electrical Characteristics

| Color         | Base Part Number  | Forward Voltage $V_f$<br>(V) <sup>[1],[2]</sup> |      |      |      | Test Current<br>(mA) | Typical Temperature Coefficient of Forward Voltage<br>(mV/°C)<br>$\Delta V_f / \Delta T_j$ | Typical Thermal Resistance Junction to Case (°C/W)<br>$R\theta_{j-c}$ |
|---------------|-------------------|-------------------------------------------------|------|------|------|----------------------|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
|               |                   | Turn On                                         | Min  | Typ  | Max  |                      |                                                                                            |                                                                       |
| Warm White    | BXRB-27E0540-A-00 |                                                 | 17.2 | 19.1 | 21.0 | 365                  | -1 to -3                                                                                   | 2.5                                                                   |
|               | BXRB-30E0540-A-00 |                                                 | 17.2 | 19.1 | 21.0 | 365                  | -1 to -3                                                                                   | 2.5                                                                   |
|               | BXRB-27G0540-A-00 |                                                 | 17.2 | 19.1 | 21.0 | 365                  | -1 to -3                                                                                   | 2.5                                                                   |
|               | BXRB-30G0540-A-00 |                                                 | 17.2 | 19.1 | 21.0 | 365                  | -1 to -3                                                                                   | 2.5                                                                   |
|               | BXRB-27E0740-A-00 |                                                 | 25.7 | 28.6 | 31.5 | 350                  | -1 to -3                                                                                   | 1.5                                                                   |
|               | BXRB-30E0740-A-00 |                                                 | 25.7 | 28.6 | 31.5 | 350                  | -1 to -3                                                                                   | 1.5                                                                   |
|               | BXRB-27G0740-A-00 |                                                 | 25.7 | 28.6 | 31.5 | 350                  | -1 to -3                                                                                   | 1.5                                                                   |
|               | BXRB-30G0740-A-00 |                                                 | 25.7 | 28.6 | 31.5 | 350                  | -1 to -3                                                                                   | 1.5                                                                   |
| Neutral White | BXRB-40E0810-A-00 |                                                 | 25.7 | 28.6 | 31.5 | 350                  | -1 to -3                                                                                   | 1.5                                                                   |
| Cool White    | BXRB-56C0700-A-00 |                                                 | 17.2 | 19.1 | 21.0 | 365                  | -1 to -3                                                                                   | 2.5                                                                   |
|               | BXRB-56C1000-A-00 |                                                 | 25.7 | 28.6 | 31.5 | 350                  | -1 to -3                                                                                   | 1.5                                                                   |

Notes for Table 4:

1. Parts are tested in pulsed conditions,  $T_j = 25^\circ\text{C}$ . Pulse width is 10 ms at rated test current.
2. Bridgelux maintains a tester tolerance of  $\pm 0.10$  V on forward voltage measurements.

## Absolute Minimum and Maximum Ratings

Table 5: Minimum and Maximum Current and Reverse Voltage Ratings

| Part Number       | Maximum DC Forward Current (mA) | Maximum Peak Pulsed Current (mA) <sup>[3]</sup> | Maximum Reverse Voltage (Vr) <sup>[1]</sup> |
|-------------------|---------------------------------|-------------------------------------------------|---------------------------------------------|
| BXRB-27E0540-A-00 | 700                             | 700                                             | -30 Volts                                   |
| BXRB-30E0540-A-00 | 700                             | 700                                             | -30 Volts                                   |
| BXRB-27G0540-A-00 | 700                             | 700                                             | -30 Volts                                   |
| BXRB-30G0540-A-00 | 700                             | 700                                             | -30 Volts                                   |
| BXRB-27E0740-A-00 | 700                             | 700                                             | -45 Volts                                   |
| BXRB-30E0740-A-00 | 700                             | 700                                             | -45 Volts                                   |
| BXRB-27G0740-A-00 | 700                             | 700                                             | -45 Volts                                   |
| BXRB-30G0740-A-00 | 700                             | 700                                             | -45 Volts                                   |
| BXRB-40E0810-A-00 | 700                             | 700                                             | -45 Volts                                   |
| BXRB-56C0700-A-00 | 700                             | 700                                             | -30 Volts                                   |
| BXRB-56C1000-A-00 | 700                             | 700                                             | -45 Volts                                   |

Notes for Table 5:

1. Light emitting diodes are not designed to be driven in reverse voltage.
2. Bridgelux recommends a maximum duty cycle of 10% when operating LED Arrays at the maximum peak pulsed current specified.

Table 6: Maximum Ratings

| Parameter                  | Maximum Rating               |
|----------------------------|------------------------------|
| LED Junction Temperature   | 150 °C                       |
| Storage Temperature        | -40 °C to +105 °C            |
| Operating Case Temperature | 105 °C                       |
| Soldering Temperature      | 3.5 seconds, 350 °C or lower |

## Typical Performance at Alternative Drive Currents

The Bridgelux LED Arrays are tested and binned against the specifications shown in Tables 2, 3 and 4. Customers also have options to drive the LED Arrays at alternative drive currents dependent on the specific application. The typical performance at any drive current can be derived from the flux vs. current characteristics shown in Figure 6 and 7 and from the current vs. voltage characteristics shown in Figures 10-11. The typical performance at common drive currents is also summarized in Table 7.

Table 7: Typical Product Performance at Alternative Drive Currents

| Color      | Part Number        | Typical Luminous Flux $\phi_v$ (lm),<br>$T_{case}=60^{\circ}C$ | Typical Luminous Flux $\phi_v$ (lm),<br>$T_j=25^{\circ}C$ | Typical Forward Voltage $V_f$ (V) | Forward Current (mA) <sup>[2]</sup> |
|------------|--------------------|----------------------------------------------------------------|-----------------------------------------------------------|-----------------------------------|-------------------------------------|
| Warm White | BXR-B-27E0540-A-00 | 370                                                            | 405                                                       | 18.3                              | 250                                 |
|            |                    | 480                                                            | 535                                                       | 19.0                              | 350                                 |
|            |                    | <b>495</b>                                                     | <b>550</b>                                                | <b>19.1</b>                       | <b>365</b> <sup>[1]</sup>           |
|            |                    | 645                                                            | 720                                                       | 20.0                              | 500                                 |
|            | BXR-B-30E0540-A-00 | 400                                                            | 440                                                       | 18.3                              | 250                                 |
|            |                    | 520                                                            | 580                                                       | 19.0                              | 350                                 |
|            |                    | <b>540</b>                                                     | <b>600</b>                                                | <b>19.1</b>                       | <b>365</b> <sup>[1]</sup>           |
|            |                    | 700                                                            | 780                                                       | 20.0                              | 500                                 |
|            | BXR-B-27G0540-A-00 | 330                                                            | 365                                                       | 18.3                              | 250                                 |
|            |                    | 430                                                            | 480                                                       | 19.0                              | 350                                 |
|            |                    | <b>445</b>                                                     | <b>495</b>                                                | <b>19.1</b>                       | <b>365</b> <sup>[1]</sup>           |
|            |                    | 580                                                            | 645                                                       | 20.0                              | 500                                 |
|            | BXR-B-30G0540-A-00 | 360                                                            | 395                                                       | 18.3                              | 250                                 |
|            |                    | 470                                                            | 520                                                       | 19.0                              | 350                                 |
|            |                    | 485                                                            | 540                                                       | <b>19.1</b>                       | <b>365</b> <sup>[1]</sup>           |
|            |                    | 630                                                            | 700                                                       | 20.0                              | 500                                 |
|            | BXR-B-27E0740-A-00 | 505                                                            | 565                                                       | 27.5                              | 250                                 |
|            |                    | <b>680</b>                                                     | <b>755</b>                                                | <b>28.5</b>                       | <b>350</b> <sup>[1]</sup>           |
|            |                    | 900                                                            | 1005                                                      | 30                                | 500                                 |
|            | BXR-B-30E0740-A-00 | 550                                                            | 615                                                       | 27.5                              | 250                                 |
|            |                    | <b>740</b>                                                     | <b>820</b>                                                | <b>28.5</b>                       | <b>350</b> <sup>[1]</sup>           |
|            |                    | 980                                                            | 1090                                                      | 30                                | 500                                 |
|            | BXR-B-27G0740-A-00 | 455                                                            | 510                                                       | 27.5                              | 250                                 |
|            |                    | <b>615</b>                                                     | <b>680</b>                                                | <b>28.5</b>                       | <b>350</b> <sup>[1]</sup>           |
|            |                    | 810                                                            | 905                                                       | 30                                | 500                                 |
|            | BXR-B-30G0740-A-00 | 495                                                            | 555                                                       | 27.5                              | 250                                 |
|            |                    | <b>665</b>                                                     | <b>740</b>                                                | <b>28.5</b>                       | <b>350</b> <sup>[1]</sup>           |
|            |                    | 880                                                            | 980                                                       | 30                                | 500                                 |

Table 8: Typical Product Performance at Alternative Drive Currents


| Color         | Part Number        | Typical Luminous Flux $\phi_v$ (lm),<br>$T_{case}=60^{\circ}C$ | Typical Luminous Flux $\phi_v$ (lm),<br>$T_j=25^{\circ}C$ | Typical Forward Voltage $V_f$ (V) | Forward Current (mA) <sup>[2]</sup> |
|---------------|--------------------|----------------------------------------------------------------|-----------------------------------------------------------|-----------------------------------|-------------------------------------|
| Neutral White | BXR-B-40E0810-A-00 | 610                                                            | 675                                                       | 27.5                              | 250                                 |
|               |                    | <b>810</b>                                                     | <b>900</b>                                                | <b>28.5</b>                       | <b>350<sup>[1]</sup></b>            |
|               |                    | 1080                                                           | 1200                                                      | 30.0                              | 500                                 |
| Cool White    | BXR-B-56C0700-A-00 | 510                                                            | 565                                                       | 18.3                              | 250                                 |
|               |                    | 680                                                            | 750                                                       | 19.0                              | 350                                 |
|               |                    | <b>700</b>                                                     | <b>780</b>                                                | <b>19.1</b>                       | <b>365<sup>[1]</sup></b>            |
|               |                    | 900                                                            | 1000                                                      | 20.0                              | 500                                 |
|               | BXR-B-56C1000-A-00 | 720                                                            | 800                                                       | 27.5                              | 250                                 |
|               |                    | <b>960</b>                                                     | <b>1070</b>                                               | <b>28.5</b>                       | <b>350<sup>[1]</sup></b>            |
|               |                    | 1290                                                           | 1430                                                      | 30.0                              | 500                                 |

Notes for Table 7 and 8:

1. Product is tested and binned at the specified drive current.
2. Operating these LED Arrays at or below the drive currents listed in Table 6 and 7, with a case temperature maintained at or below 70°C, will enable the average lumen maintenance projection outlined earlier in this Product Data Sheet.

## Mechanical Dimensions

Figure 1: Drawing for all ES BXRb arrays.

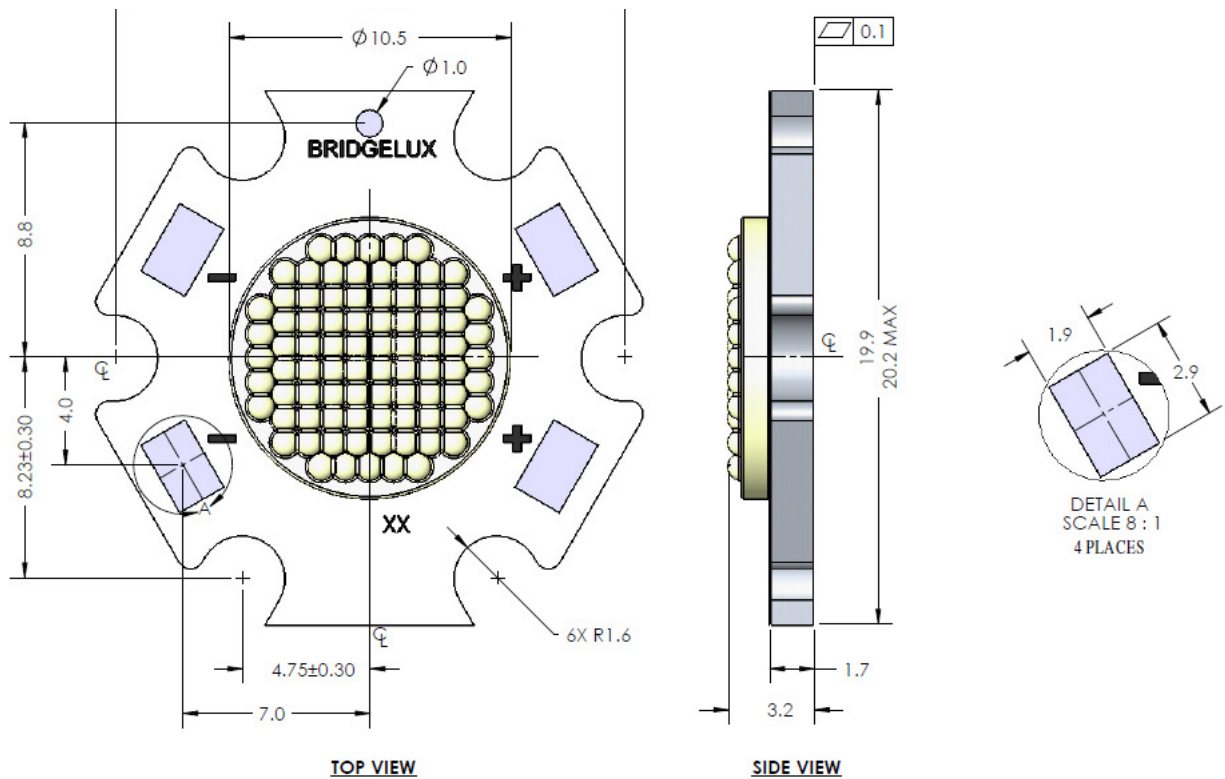

### Notes for Figure 1:

1. Slots are for M2.5 or #4 screws.
2. Solder pads are labeled "+" and "-" to denote positive and negative, respectively.
3. Drawings are not to scale.
4. Drawing dimensions are in millimeters.
5. Unless otherwise specified, tolerances are  $\pm 0.20$ mm.
6. Refer to product Application Notes AN10 and AN11 for product handling, mounting and heat sink recommendations.
7. The optical center of the LED Array is defined by the mechanical center of the array.

## Typical Radiation Pattern

Figure 2: Typical Far Field Radiation Pattern



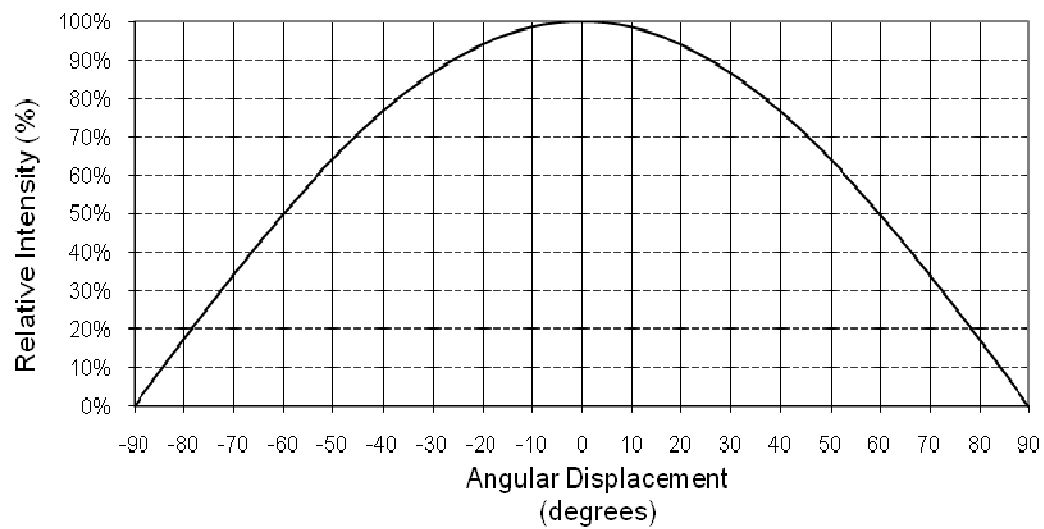




Figure 3: Typical Far Field Polar Radiation Pattern

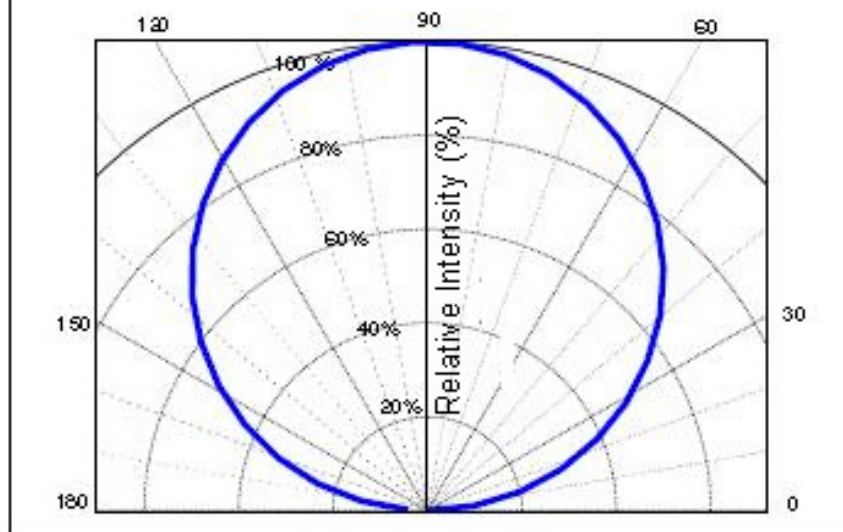


## Wavelength Characteristics at Rated Test Current, $T_j=25^{\circ}\text{C}$

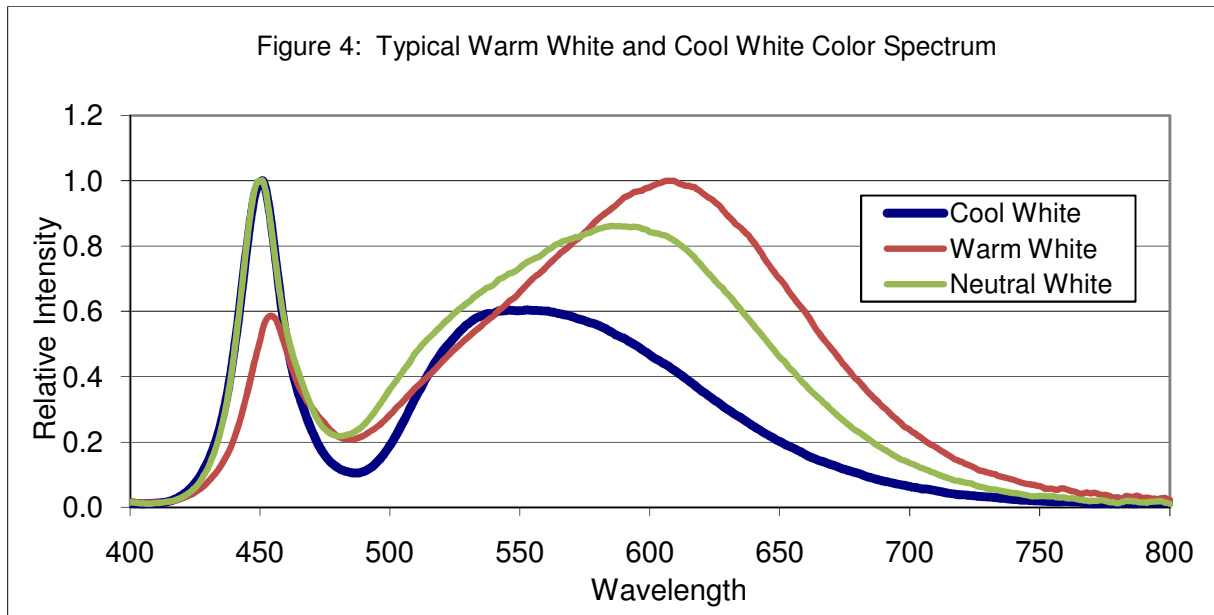

## Typical Relative Luminous Flux vs. Current, $T_j=25^\circ\text{C}$

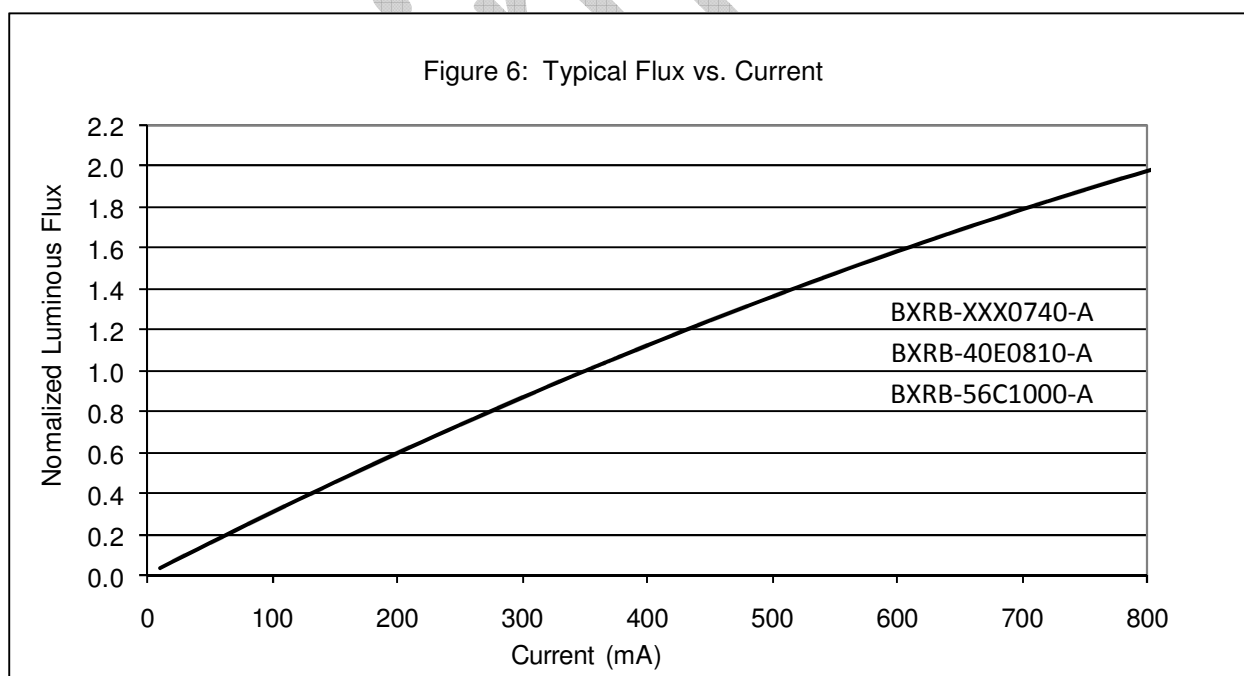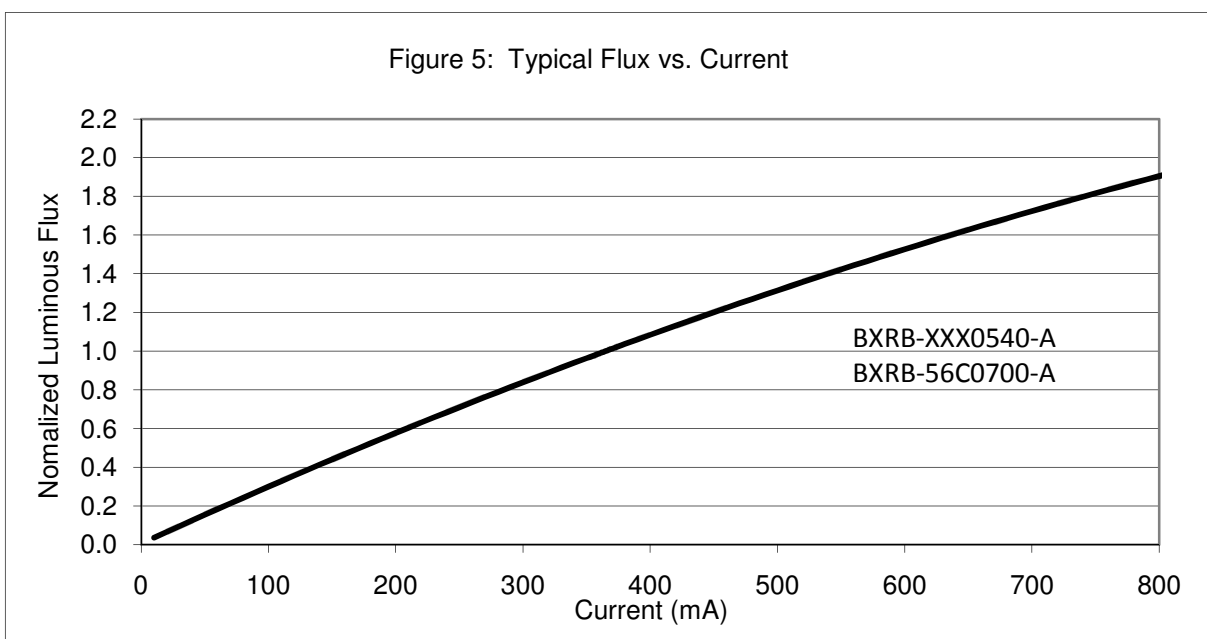

## Typical Light Output Characteristics vs. Temperature

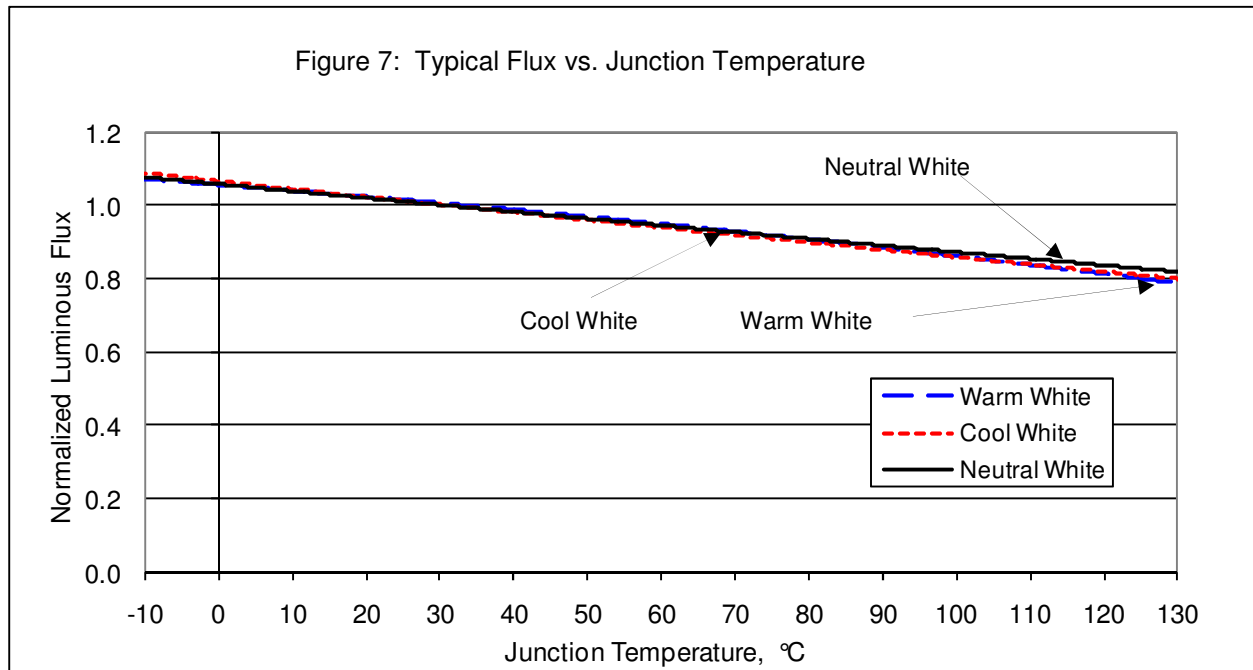

## Typical Chromaticity Characteristics vs. Temperature

Figure 8: Typical ccx Shift vs. Junction Temperature


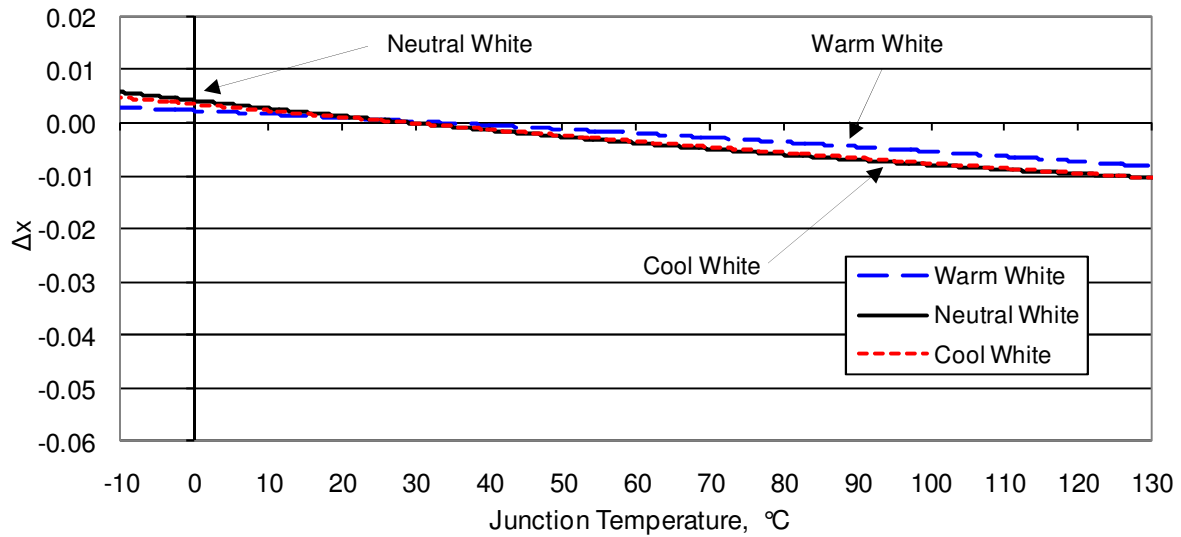


Figure 9: Typical ccy Shift vs. Junction Temperature

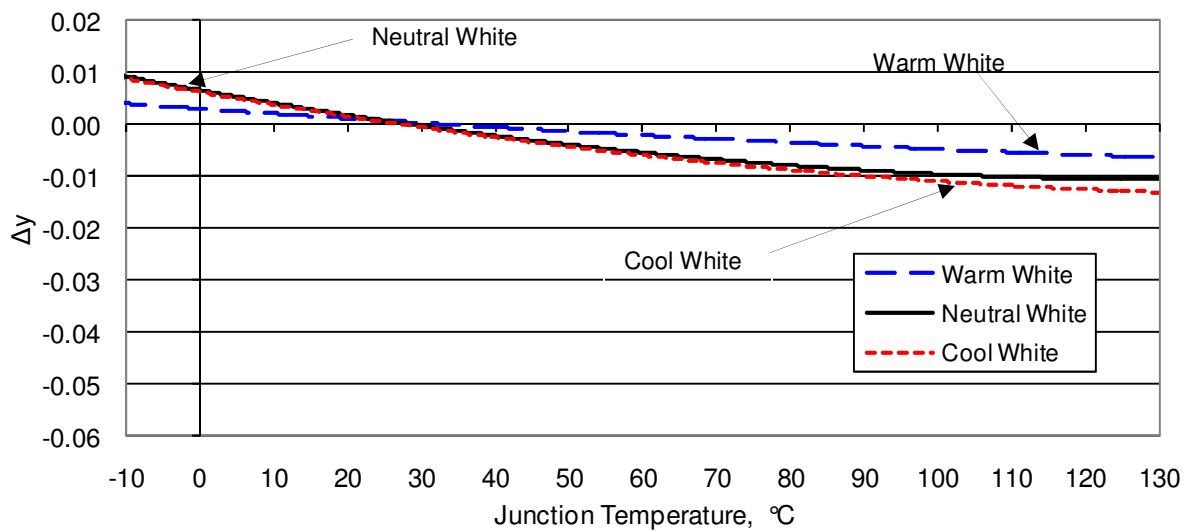

## Typical Forward Current Characteristics at $T_j = 25^\circ\text{C}$

Figure 10: Typical Current vs. Voltage,  
BXR-XXX0540-A, BXR-56C0700-A


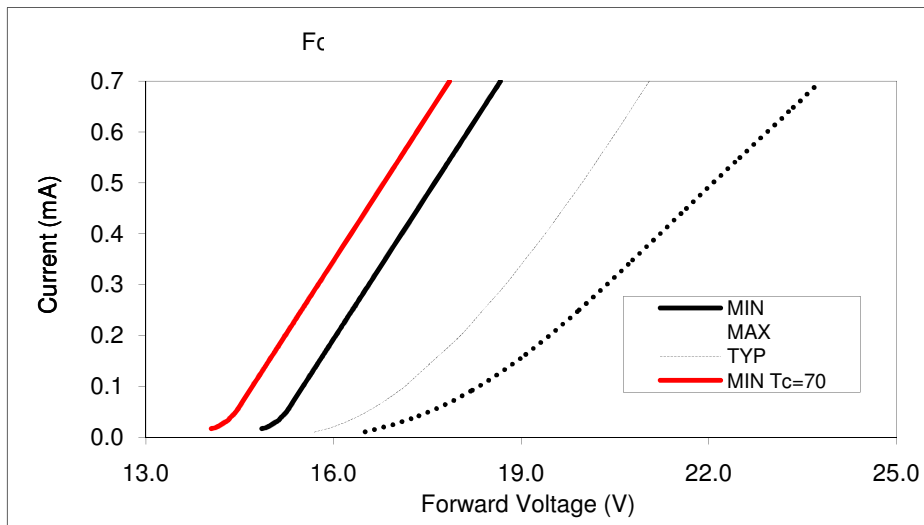


Figure 11: Typical Current vs. Voltage  
BXR-XXX0740-A, BXR-40E0810-A, BXR-56C1000

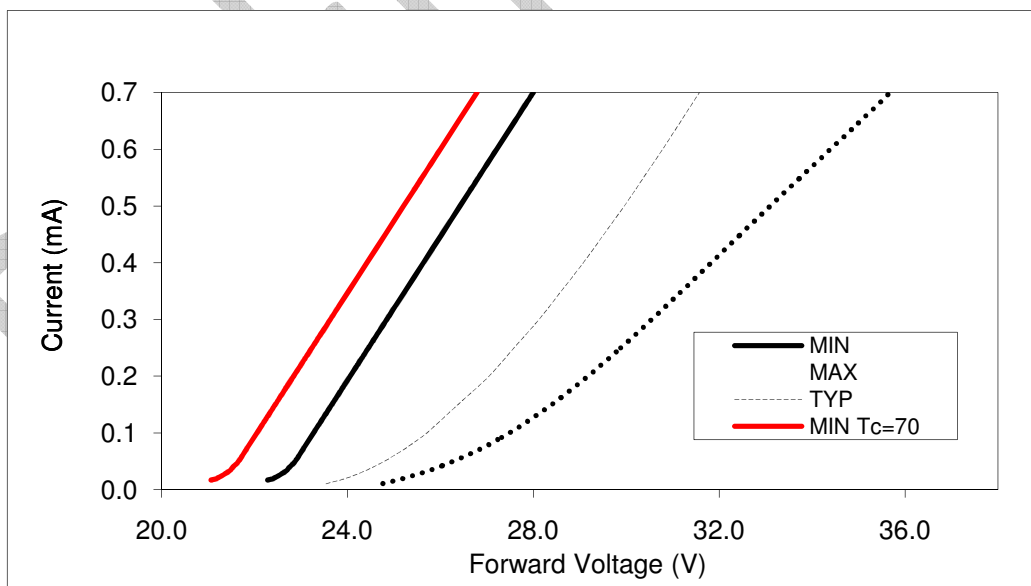

---

## Product Binning

Typical manufacturing processes of semiconductor products result in a variation in performance surrounding the typical data sheet values. In order to minimize variation in the end product or application, Bridgelux bins its LED Arrays for color.

Bridgelux LED Arrays are labeled using a 2-digit alphanumeric bin code. This bin code is printed on the back of each LED Array in the following format:

A B

Where:

A B – designates color bin (P3, P4, Q3, etc.)

All product packaged within a single tube are of the same color bin combination (or bin code). Using these codes it is possible to determine the best product utilization to deliver the consistency required in a given application.

## Color Binning Information

Figure 12: Graph of Warm White Test Bins in xy Color Space

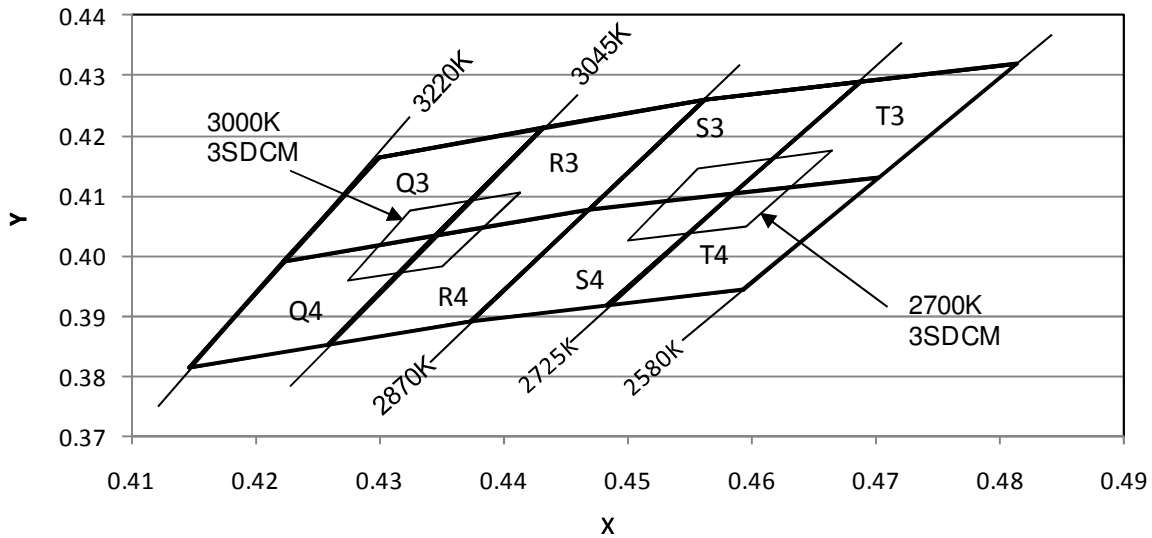


Table 9: Warm White xy Bin Coordinates and Associated Typical CCT

| Bin Code | X      | Y      | ANSI CCT (K) | Bin Code | X      | Y      | ANSI CCT (K) |
|----------|--------|--------|--------------|----------|--------|--------|--------------|
| Q3       | 0.4223 | 0.3990 | 3000         | S3       | 0.4468 | 0.4077 | 2700         |
|          | 0.4299 | 0.4165 |              |          | 0.4562 | 0.4260 |              |
|          | 0.4431 | 0.4213 |              |          | 0.4688 | 0.4290 |              |
|          | 0.4345 | 0.4033 |              |          | 0.4585 | 0.4104 |              |
| Q4       | 0.4147 | 0.3814 | 3000         | S4       | 0.4373 | 0.3893 | 2700         |
|          | 0.4223 | 0.3990 |              |          | 0.4468 | 0.4077 |              |
|          | 0.4345 | 0.4033 |              |          | 0.4585 | 0.4104 |              |
|          | 0.4260 | 0.3854 |              |          | 0.4483 | 0.3919 |              |
| R3       | 0.4345 | 0.4033 | 3000         | T4       | 0.4585 | 0.4104 | 2700         |
|          | 0.4431 | 0.4213 |              |          | 0.4688 | 0.4290 |              |
|          | 0.4562 | 0.4260 |              |          | 0.4813 | 0.4319 |              |
|          | 0.4468 | 0.4077 |              |          | 0.4703 | 0.4132 |              |
| R4       | 0.4260 | 0.3854 | 3000         | T3       | 0.4483 | 0.3919 | 2700         |
|          | 0.4345 | 0.4033 |              |          | 0.4585 | 0.4104 |              |
|          | 0.4468 | 0.4077 |              |          | 0.4703 | 0.4132 |              |
|          | 0.4373 | 0.3893 |              |          | 0.4593 | 0.3944 |              |
| 3SDCM    | 0.4413 | 0.4107 | 3000         | 3SDCM    | 0.4665 | 0.4175 | 2700         |
|          | 0.4325 | 0.4075 |              |          | 0.4557 | 0.4145 |              |
|          | 0.4274 | 0.3958 |              |          | 0.4500 | 0.4026 |              |
|          | 0.4350 | 0.3984 |              |          | 0.4595 | 0.4050 |              |

## Color Binning Information (continued)

Figure 13: Graph of Neutral White Test Bins in xy Color Space

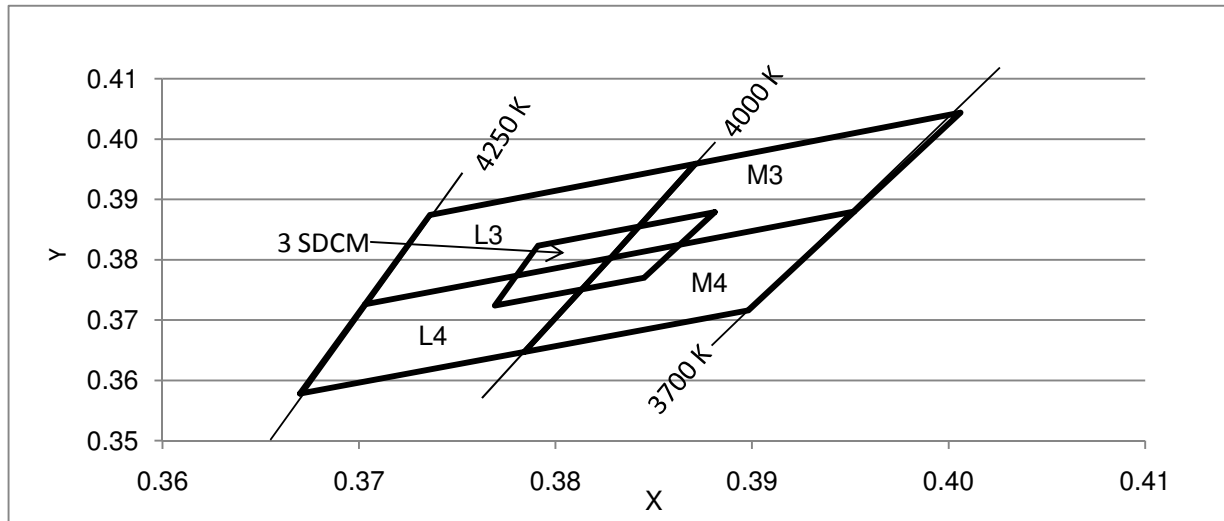


Table 10: Neutral White xy Bin Coordinates and Associated Typical CCT

| Bin Code | X      | Y      | ANSI CCT (K) |
|----------|--------|--------|--------------|
| L3       | 0.3703 | 0.3726 | 4000         |
|          | 0.3736 | 0.3874 |              |
|          | 0.3871 | 0.3959 |              |
|          | 0.3828 | 0.3803 |              |
| L4       | 0.3670 | 0.3578 | 4000         |
|          | 0.3703 | 0.3726 |              |
|          | 0.3828 | 0.3803 |              |
|          | 0.3784 | 0.3647 |              |
| M3       | 0.3828 | 0.3803 | 4000         |
|          | 0.3871 | 0.3959 |              |
|          | 0.4006 | 0.4044 |              |
|          | 0.3952 | 0.3880 |              |
| M4       | 0.3784 | 0.3647 | 4000         |
|          | 0.3828 | 0.3803 |              |
|          | 0.3952 | 0.3880 |              |
|          | 0.3898 | 0.3716 |              |
| 3SDCM    | 0.3881 | 0.3879 | 4000         |
|          | 0.3791 | 0.3823 |              |
|          | 0.3769 | 0.3724 |              |
|          | 0.3845 | 0.3770 |              |

## Color Binning Information (continued)

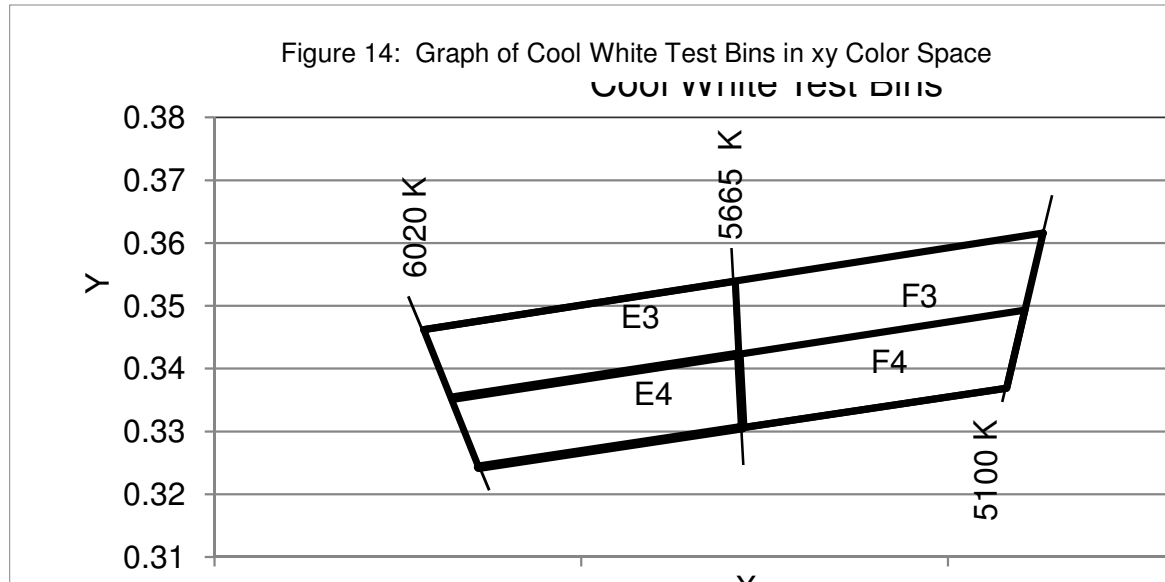


Table 11: Cool White xy Bin Coordinates and Associated Typical CCT

| Bin Code | X      | Y      | ANSI CCT (K) |
|----------|--------|--------|--------------|
| E4       | 0.3222 | 0.3243 | 5700         |
|          | 0.3294 | 0.3306 |              |
|          | 0.3293 | 0.3423 |              |
|          | 0.3215 | 0.3353 |              |
| E3       | 0.3215 | 0.3353 | 5700         |
|          | 0.3293 | 0.3423 |              |
|          | 0.3292 | 0.3539 |              |
|          | 0.3207 | 0.3462 |              |
| F3       | 0.3292 | 0.3539 | 5700         |
|          | 0.3293 | 0.3423 |              |
|          | 0.3371 | 0.3493 |              |
|          | 0.3376 | 0.3616 |              |
| F4       | 0.3294 | 0.3306 | 5700         |
|          | 0.3366 | 0.3369 |              |
|          | 0.3371 | 0.3493 |              |
|          | 0.3293 | 0.3423 |              |

---

## Design Resources

Bridgelux has developed a comprehensive set of application notes and design resources to assist customers in successfully designing with Bridgelux LED Array products. Included below is a list of available resources which can be downloaded from the Bridgelux web site under the Design Resources section. These documents are updated regularly as new information becomes available, including complimentary infrastructure products such as commercially available secondary optics and electronic driver solutions.

### Application Notes

- AN10: Effective Thermal Management of Bridgelux LED Arrays
- AN11: Assembly Considerations for Bridgelux LED Arrays
- AN12: Electrical Drive Considerations for Bridgelux LED Arrays
- AN14: Reliability Data Sheet for Bridgelux LED Arrays
- AN15: Reflow Soldering of Bridgelux LED Arrays
- AN16: Optical Considerations for Bridgelux LED Arrays
- DS19: Bridgelux LED Array Data Sheet for Packing and Labeling

### Optical Source Models

Optical source models and ray set files are available for all Bridgelux LED Array products, and can be downloaded directly from the Bridgelux web site. The list below contains the formats currently available. If you require a specific format not included in this list, please contact your Bridgelux sales representative for assistance.

- Zemax
- ASAP
- IESNA
- LightTools
- LucidShape
- OPTIS SPEOS
- PHOTOPIA
- TracePro
- Radiant Imaging Source Model

### 3D CAD Models

Three dimensional CAD models depicting the product outline of all Bridgelux LED Arrays are available in both SAT and STEP formats. These CAD files can be downloaded directly from the Bridgelux web site.

---

## About Bridgelux

Bridgelux LED Arrays are developed, manufactured and marketed by Bridgelux, Inc. Bridgelux is a U.S. lighting company and leading developer of technologies and solutions that will transform the \$40 billion global lighting industry into a \$100 billion market opportunity. Based in Silicon Valley, Bridgelux is a pioneer in solid-state lighting (SSL), expanding the market for solid state lighting by driving down the cost of light through innovation. Bridgelux's patented light source technology replaces traditional lighting technologies (such as incandescent, halogen and fluorescent lamps) with integrated, solid-state solutions, enabling lamp and luminaire manufacturers to develop high performance and energy-efficient white light products. The plug and play simplicity of the Bridgelux LED Arrays enable our customers to address the rapidly growing interior and exterior solid state lighting markets, including street lights, retail lighting, commercial lighting and consumer applications. With more than 250 patent applications filed or granted worldwide, Bridgelux is the only vertically integrated LED manufacturer that designs its solutions specifically for the lighting industry.

For more information about the company, please visit [www.bridgelux.com](http://www.bridgelux.com)

© 2011 Bridgelux, Inc. All rights reserved. Product specifications are subject to change without notice.

