


103 Series Multipole

Technical Specifications

Product range covered:

S / SC / SA / SV / SOV / SS / SSC / WSO / SF / SFE / SFU / SFPE / SFPU / D / DB / DBP / DBPC / DG / DGP
DEE / DEU / DBEE / DBEU / DBPE / DBPU / DBPLE / DBPLU / K / KE / KS / KSE / DKBE / WDE

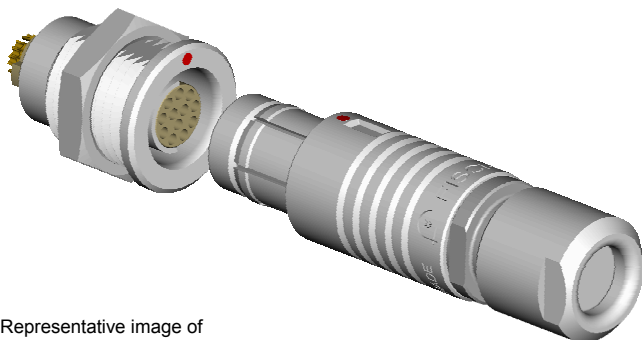

Representative image of
standard S and D bodies

Product Benefits

- Up to a maximum of 12 contacts
- Unsealed (IP50), waterproof (IP68) or hermetically sealed
- 3 keying-codes
- Reverse contact variants
- Standard matt silver chrome or non-reflective matt black chrome finish
- Full range of accessories including bend reliefs and sealing caps available
- Scoop-proof (IEC 60512-1-4)

Pages

Environmental & Mechanical Data.....	2
Material & Surface Treatments	2
Electrical Data	2
Contact Configurations	3
Tooling	4

Information provided herein is believed to be accurate at time of publishing. Fischer Connectors reserves the right to make modifications on products for continuous improvement without prior notice.

Environmental & Mechanical Data

Characteristic	Product Type	Value	Standard
Sealing Performance	Unsealed Connectors (mated)	IP50	IEC 60529
	Plugs with General Purpose Sealed Clamps (mated) (1)	IP68: 2 m submersion for 24 hours IP69K (2)	
	Receptacles "U" Body Style	IP68: 2 m submersion for 24 hours	
	Receptacles "E" Body Style	Hermetic: Tested: < 10 ⁻⁸ mbar l/sec. IP69K (2)	
Operating Temperature Range	Unsealed Connectors	-65°C to +200°C	IEC 60512-6-11 i+j IEC 60068-2-14-Nb
	Plugs Using General Purpose Sealed Clamps	-65°C to +130°C	
	Receptacles "U" Body Style	-50°C to +200°C (3)	
	Receptacles "E" Body Style	-50°C to +150°C (3)	
Corrosion Resistance		Salt mist, 96 hours, 5% salt solution, 35°C	IEC 60068-2-11 Test Ka MIL-STD-202 Method 101 Condition A
Endurance		5'000 mating cycles	IEC 60512-5-9a EIA-364-09
Vibration		10 to 2000 Hz, 1.5 mm or 15 g, 12 sweep cycles per axis, 20 minutes per 10-2000-10 Hz sweep cycle, no discontinuity > 1 us	MIL-STD-202 Method 204 Condition B
Radiation Resistance (4)	Unsealed Connectors	PEEK: 10 ⁶ Gy (=100M Rads)	
	Sealed Receptacles	Viton® O-rings: 10 ⁵ Gy (=10M Rads)	

- (1) The sealing performance can be affected by the long term quality of the cable.
- (2) Dust tight, protected against the effects of high-pressure liquids. The test requirements for IP69K exist only in DIN 40050-9, the German version of IEC 60529.
- (3) With Viton® O-ring (standard) in receptacle interface: Operating temperature of Viton® O-ring: -20°C to +200°C. Min mating temperature of 0°C.
With EPDM O-ring (Low temp) on request in receptacle interface: Operating temperature of EPDM O-ring: -50°C to +160°C. Min mating temperature of -20°C.
- (4) For information only. Not tested by Fischer Connectors.

Material & Surface Treatments

Metal Parts	Material			Finish	
	Designation	ISO	Standard	Designation	Standard
Body Shell	Brass	CuZn39Pb3	CW614N UNS C 38500	Chrome over Nickel	SAE-AMS-QQ-C-320
Cable Clamps, Nuts and other Inner Parts	Brass	CuZn39Pb3	CW614N UNS C 38500	Nickel	SAE-AMS-QQ-N-290 SAE-AMS2404
Contacts - Male (solder) - Female, - Male (crimp)	Brass	CuZn39Pb3	CW614N UNS C 38500	1 µm Gold over Nickel	MIL-DTL-45204D Type I ASTM B488
	Bronze	CuSn4Zn4Pb4	CW456K ASTM B 139, UNS C 54400		
Insulator and Sealing	International Symbol		Flammability	Standard	
Insulator	PEEK		UL 94 V-0	MIL-P-46183	
Interface O-rings (Receptacles)	Viton® EPDM		UL 94 V-0 UL 94 HB	~SAE-AMS7276	
Sealant Material (Receptacles) - IP68 - Hermetic	Silicon compound Epoxy compound		UL 94 V-0 UL 94 HB		
Cable Sealing (Plugs) - IP68	TPE-S		UL 94 HB		

Our products are RoHS compliant and conform with the EC Directive 2002/95/EC

Electrical Data

Characteristic	Contact Size	Typical Values	Standard
Contact Resistance over 5'000 Mating Cycles	Ø0.5 mm Ø0.7 mm Ø0.9 mm Ø1.3 mm	5 mΩ 5 mΩ 4 mΩ 2.5 mΩ	IEC 60512-2-2a/b
Shell Resistance		30 mΩ	IEC 60512-2-2f
Insulation Resistance		> 10 ¹⁰ Ω	IEC 60512-2-3a, Method C
Shielding Effectiveness		> 60 dB up to 1GHz	IEC 60512-23-3

Contact Configurations

Type	Pin Layout	Number of Contacts	Contact Diameter [mm]	Wire Size (2)		Current Rating [A]	Rated Voltage r.m.s. [V]	Insertion/Extraction Force (typ.) [N] (5)	
				Solder (1) Contacts	Crimp Contacts	IEC 60512-3-5b	IEC 60664-1	IEC 60512-7-13a, MIL-STD-1344	
						(3)	(4)	Unsealed	Sealed
103 A Z 051		2	1.3	Max Ø1.18 mm AWG17 [1] AWG18 [16/30]	Max 1.18 mm Min 0.58 mm AWG18-24	13	≤ 250	~25	~25
103 A Z 052		3	1.3	Max Ø1.18 mm AWG17 [1] AWG18 [16/30]	-	12	≤ 250	~25	~25
103 A Z 053		4	0.9	Max Ø0.79 mm AWG21 [1] AWG22 [7/30]	-	7.0	≤ 250	~25	~25
103 A Z 054		5	0.9	Max Ø0.79 mm AWG21 [1] AWG22 [7/30]	Max 0.83 mm Min 0.48 mm AWG22-26	6.8	≤ 250	~25	~30
103 A Z 056		6	0.7	Max Ø0.79 mm AWG21 [1] AWG22 [7/30]	Max 0.62 mm Min 0.38 mm AWG24-28	5.2	≤ 250	~25	~30
103 A Z 057		7	0.7	Max Ø0.79 mm AWG21 [1] AWG22 [7/30]	Max 0.62 mm Min 0.38 mm AWG24-28	5.0	≤ 250	~30	~30
103 A Z 058		8	0.7	Max Ø0.79 mm AWG21 [1] AWG22 [7/30]	Max 0.62 mm Min 0.38 mm AWG24-28	3.8	≤ 200	~30	~35
103 A Z 062		12	0.5	Max Ø0.43 mm AWG26 [1] AWG28 [19/40]	Max 0.43 mm Min 0.20 mm AWG28-32	2.0	≤ 200	~30	~35

(1) Stranding values in brackets.

(2) Exceptionally for a given AWG, the diameter of some stranded conductor designs could be larger than the hole diameter of the crimp barrel. Trials may be required.

(3) Recommended max. operating current per contact at 40°C temperature rise.


(4) Recommended operating voltage at sea level.

This rated voltage is a general purpose guideline where no other electrical safety standard applies. In case other standards rule a specific use of the connector, then the application specific safety criteria shall be considered first. This must be evaluated in the frame of equipment engineering.

In case other calculation methods are preferred, please refer to general catalogue for test voltage data.

(5) Values may vary strongly depending on environmental conditions, ageing, finish or type of seal.

Tooling

	Designation	Contact Gender	Size [mm]	Part Number
	Crimp Tool (1)			TX00.240
	Crimp Positioner (1)	Male	Ø0.5	TX00.300
		Female	Ø0.5	TX00.302
		Male	Ø0.7	TX00.304
		Female	Ø0.7	TX00.305
		Male	Ø0.9	TX00.307
		Female	Ø0.9	TX00.309
		Male	Ø1.3	TX00.311
		Female	Ø1.3	TX00.312
	Contact Insertion Tool		Ø0.5	TX00.214
			Ø0.7	TX00.210
			Ø0.9	TX00.211
			Ø1.3	TX00.273
	Contact Extraction Tool		Ø0.5	TX00.213
			Ø0.7	TX00.200
			Ø0.9	TX00.205
			Ø1.3	TX00.212
	Double-End Open Spanner Extra Thin		9	TX00.009
			10	TX00.010
			11	TX00.011
			12	TX00.012
			13	TX00.013
			14	TX00.014
	Open-End Spanner Extra Thin		15	TX00.015
			17	TX00.017
	Nut Driver with T-Handle and Hex Drive for Decorative Slotted Nut		M 12 x 1	TF00.001
			M 14 x 1	TG00.001

(1) For detailed crimping instructions, log on to our online technical library at www.fischerconnectors.com/technical