


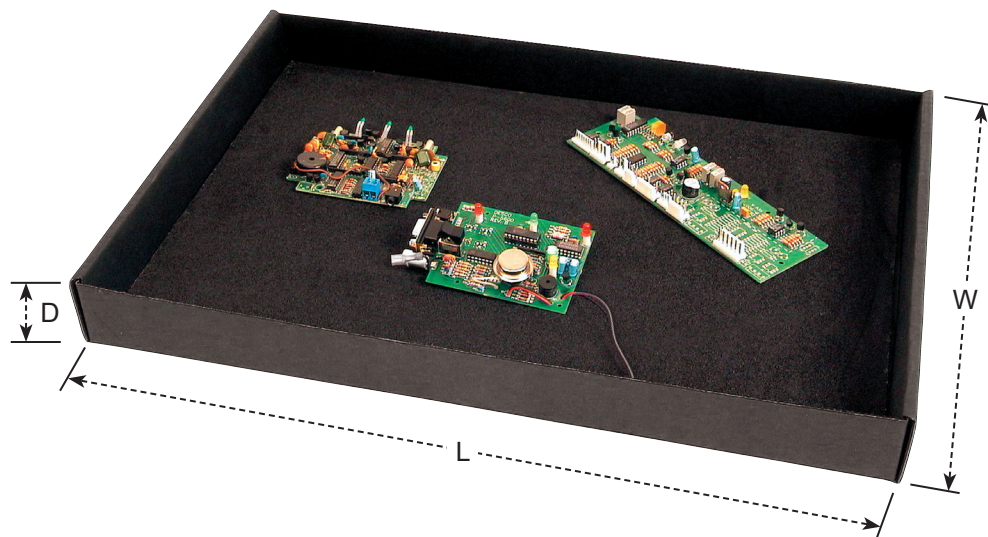

Features

- Basic Protektive Pak tray
- Great container for Kanban
- Permanently static dissipative foam (shuntable) laminated to our impregnated corrugated material provides ESD and shock protection

Foam Electrical Properties: 1×10^4 to $< 1 \times 10^{11}$ ohms

Foam Thickness: 1/4" (+/- 1/16" tolerances)

Item	Size I.D. - L x W x D (IN)
37650	17-3/4 x 10-3/4 x 2-1/8
37651	17-7/8 x 13-5/8 x 2-1/8
37653	19-1/4 x 13-1/8 x 2-1/8
37654	19-3/8 x 15-3/4 x 2-1/8
37652	24 x 13-1/2 x 2-1/8

Dimensional tolerances are +/- 1/8" unless otherwise specified

Meets the required limits of ANSI/ESD S20.20, Packaging standard ANSI/ESD S541, and worksurface standard ANSI/ESD S4.1

SPECIFICATIONS

Properties

Surface Resistance

Sloughing Test

Recyclability

Typical Values

1×10^6 to $< 1 \times 10^9$ ohms

Negligible surface damage at 10 cycles and <5% of surface damage at 200 cycles in Taber Abrasion Test.

No conductive particles abraded from surface

Complete recyclability of package

Test Procedures/Method

ANSI/ESD STM11.11

ASTM D4060 at 70 rpm with CS-17 abrasive-coated wheels and 1000 grams load

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

RoHS, REACH, and Conflict Minerals Statement:

See the Desco Industries ROHS, Reach and Conflict Minerals Statement
[Descoindustries.com/ROHS3.aspx](https://descoindustries.com/ROHS3.aspx)

See the Protektive Pak Limited Warranty
[Protektivepak.descoindustries.com/Limited-Warranty.aspx](https://protektivepak.descoindustries.com/Limited-Warranty.aspx)



Made in the
United States of America

Specifications and procedures subject to change without notice.

BOARD HANDLER TRAYS

PROTEKTIVE PAK
13520 MONTE VISTA AVENUE, CHINO, CA 91710
PHONE (909) 627-2578
ProtektivePak.com

DRAWING NUMBER
37650

DATE:
December
2024

PROTEKTIVE PAK
BURIED SHIELDING LAYER