


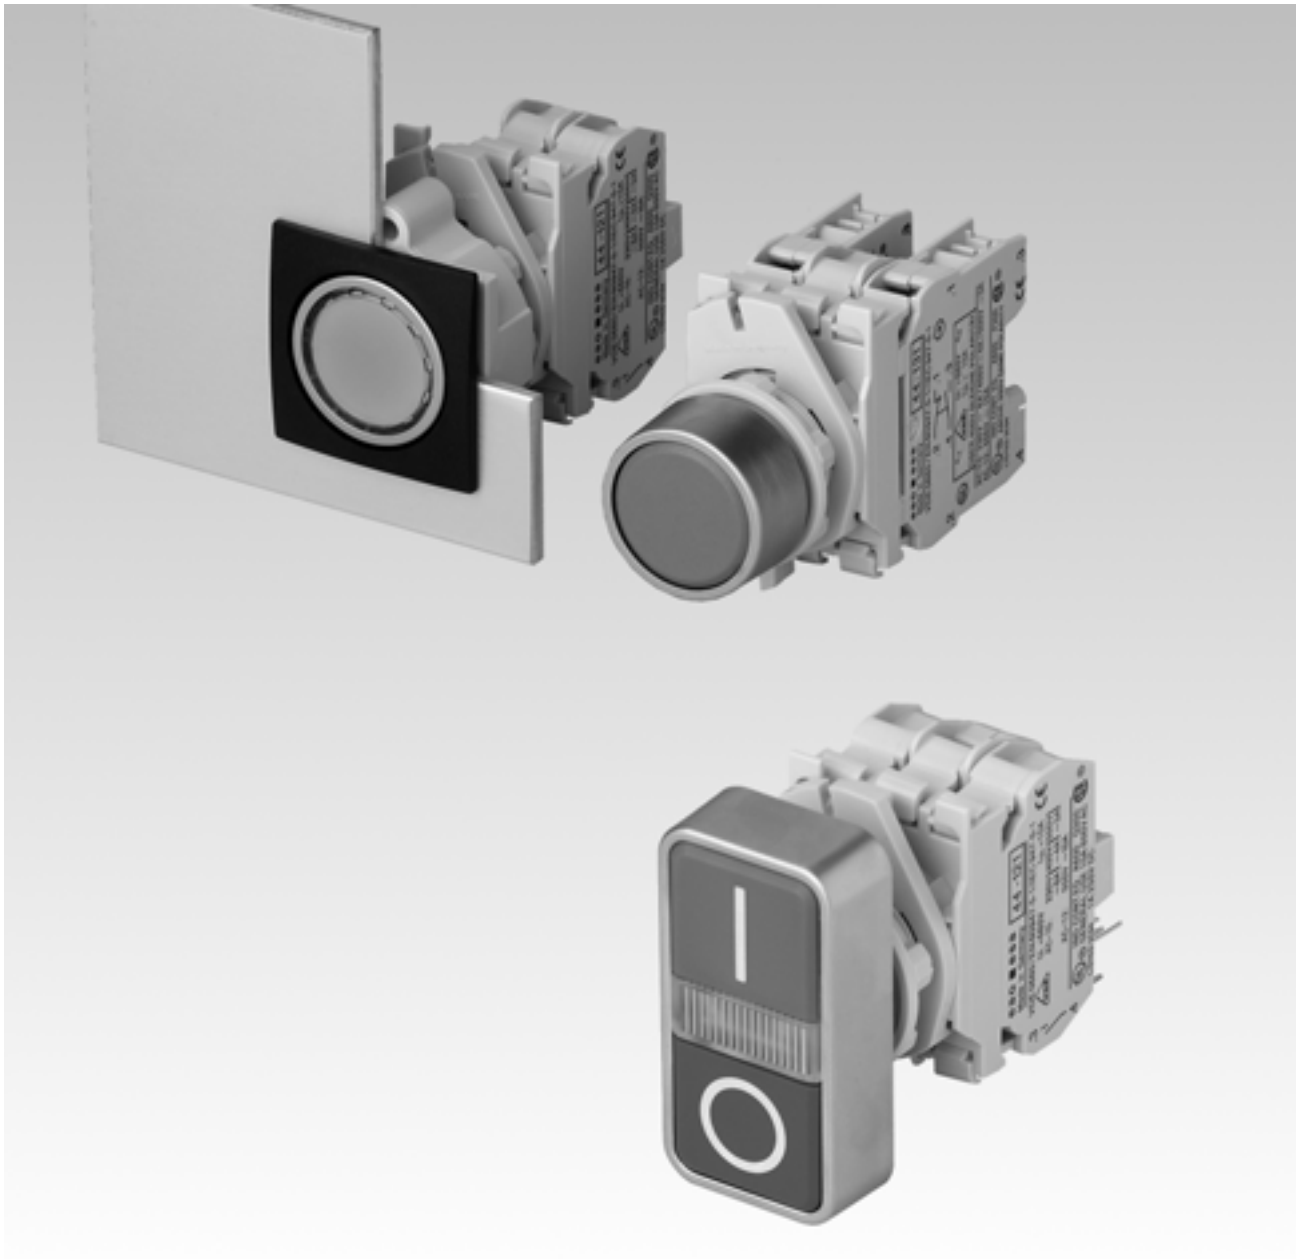

Index

Series 44

	Description	Page 285
	Product Assembly	Page 286
	Mounting Instruction	Page 287
	Product Range	
	- pushbuttons complete	Page 289
	- pushbuttons for standard mounting	Page 294
	- pushbuttons for flush mounting	Page 310
	- accessories / spare parts	Page 322
	Technical Data	Page 332
	Technical Drawing / Dimension	Page 334
	Circuit Drawing	Page 348
Typical Applications	Page 354	
Marking	Page 355	

CE

Series 44 is a high-quality product that has been manufactured and tested according to the most up-to-date international and national regulations and standards. Our products are marked with the CE sign in accordance with the directive for low voltages.

General notes

Series 44, a modular system of control units, offers the user numerous combinations with its wide range of actuator elements for pushbuttons, emergency-OFF pushbuttons, rotary and keylock switches, interlocking pushbuttons, potentiometer drives, illuminated pushbuttons and indicators. At the front the actuators feature an IP 65 protection class and can be supplied with matt grey or matt chrome front rings.

The switching elements can be supplied for fitting on front adapters or for fitting on base adapters, so that each control or indication point can be made to fit the requirements of the most varied conditions of usage, such as in industrial and mechanical engineering, marine and rail-vehicle construction, systems engineering and the construction of control mechanisms.

Design

The system consists of actuators, front or base adapters, switching elements, lamp elements, pre-switching elements and lamp transformers. The connection between the actuator elements and the various function elements is done by means of a latch click-stop connection through the front adapter for front attachment.

For base attachment the various function elements are click-stopped on to the base adapter.

For pushbuttons with front attachment, further switching elements in the 2nd level can be click-stopped on to the 1st level of switching elements (tandem arrangement).

Mounting

The control pushbuttons and indicators of Series 44 are designed to be fitted in a mounting hole of 22.5 mm diameter in accordance with IEC 947-5-1 and VDE 0660. The actuators can be inserted in mounting holes with or without recess for the anti-twisting device and are self-holding which means that they can be fitted quickly and easily in the front panel (one-person fitting).

For details of mounting and dismantling see page 287.

Keylock switches

Standard lock with integrated cap. 1 standard number 9500. Without specifications for the lock number we supply standard number 9500. For locks with defined lock number, add after the type number (code 01-10). Further lock numbers on request. Two keys are supplied for each keylock switch.

Spare keys can be ordered under Type No. 44-919 (provided the lock number is quoted).

Protection provisions

When the actuator elements are installed in metallic front panels and housings, they should not be incorporated in the protection provision. When installed in insulated housing, the "protection insulation" provision is preserved.

Terminals

All function elements have shockproof screw terminals (finger safety in accordance with DIN/VDE 0106, part 100 and VBG 4) and have openings to guide a screwdriver. When delivered, the screw terminals are open, thus guaranteeing safe and fast installation.

The lamp transformer has screw terminals as primary-terminal and as secondary connection connecting leads with multi-core cable ends. The designation for terminal connections accords with DIN EN 50013.

Connection cross-sections: single core - 0.50 mm² to 2.5 mm²
multiple core - 0.75 mm² to 1.5 mm²
multiple core with multi-core cable ends - 0.50 mm² to 1.5 mm²

Marking

The marking plate for illuminated pushbuttons, indicators or markable pushbuttons can be provided with pictograms conforming to ISO-R 369 or with lettering. (See page 355.).

Illumination

Incandescent lamps, neon lamps or light-emitting diodes (multi-LEDs) with Ba9s lampholder assure perfect illumination of the indicators and illuminated pushbuttons.

Supply

The units are supplied as single components.


Specimen orderIndicator front mounting

- actuator plastic matt chrome, red	1 x 44-750.22
- front adapter	1 x 44-900
- lamp element	1 x 44-524
- incandescent lamp 6 V	1 x 10-1406.1369

All dimensions in mm


All rights are reserved to make changes to technical data.

illuminated pushbutton / front mounting

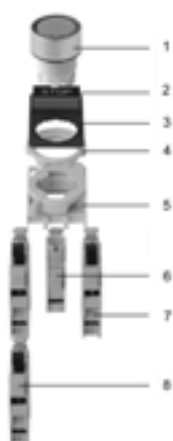


- 1 actuator
- 2 label for label support
- 3 label support
- 4 fixing nut
- 5 front adapter
- 6 lamp element
- 7 switching element 1. level
- 8 switching element 2. level

illuminated pushbutton for flush mounting / front mounting

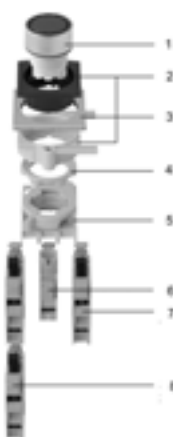

- 1 actuator
- 2 front bezel-set for flush mounting
- 3 front panel
- 4 fixing nut
- 5 front adapter
- 6 lamp element
- 7 switching element 1. level
- 8 switching element 2. level

illuminated pushbutton / base mounting (separated mounting)

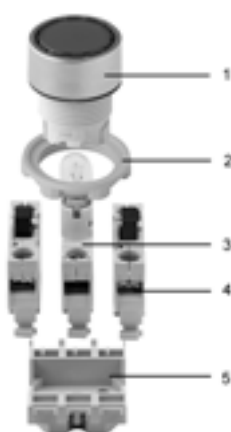


- 1 actuator
- 2 fixing nut
- 3 lamp element
- 4 switching element
- 5 base adaptor

Switching element

Dismantling a switching element with a screwdriver

To dismantle switching elements, lamp elements or lamp transformer, slightly lift the latching arm with the tip of a screwdriver.



Lamp transformer

Methods of mounting
on base adaptor

on front adaptor

Lamp transformer		
1	3	2


1	3	2
Lamp transformer		

	1	3	2
Lamp transformer	Lamp element	Switch element	


1	3	2
Switch element	Lamp element	Blind element
Lamp transformer		

Housing

Tip for mounting:

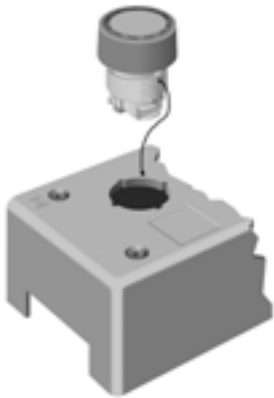

Mount the actuator so that the anti-rotation
lug faces the square area next to the moun-
ting hole.

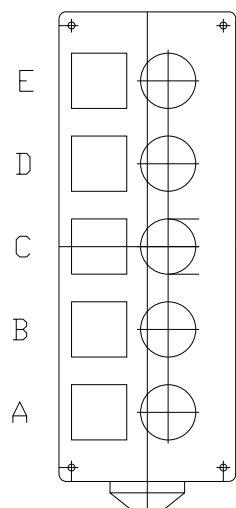

Base adaptors are included in the housing.

In the ends of the housing are cable entries 22.5 mm dia., fitted with an inlet grommet at one end.

A second grommet is supplied in the housing.

In addition, a special screw gland M20 can be supplied (see spare parts and accessories)

Opening designations

A, B, C, D and E

Opening A is nearest to the inlet grommet

indicator complete full face illumination not for marking



🛒 filament lamp page 329

🛒 LED page 329

	front ring	colour of lens	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
indicator complete full face illumination not for marking	plastic matt chrome	colourless, clear	44-750.27.000	1	1	1	0,025
		yellow	44-750.24.000	1	1	1	0,025
		green	44-750.25.000	1	1	1	0,025
		red	44-750.22.000	1	1	1	0,025

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

indicator complete front illumination for marking



🛒 filament lamp page 329

🛒 LED page 329

	front ring	colour of lens	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
indicator complete front illumination for marking with text plate translucent white	plastic matt chrome	yellow	44-751.24.000	1	1	1	0,025
		green	44-751.25.000	1	1	1	0,025
		red	44-751.22.000	1	1	1	0,025
		white	44-751.29.000	1	1	1	0,025

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

pushbutton complete



	switching action	contacts	front ring	colour of lens	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
pushbutton complete	momentary action	1 NO	plastic matt chrome	yellow	44-701.24.010	4	2	1	0,030
				green	44-701.25.010	4	2	1	0,030
				white	44-701.29.010	4	2	1	0,030
	maintained action	1 NC	plastic matt chrome	red	44-701.22.001	3	2	1	0,030
		1 NC + 1 NO	plastic matt chrome	black	44-701.20.100	2	2	1	0,037
		1 NO	plastic matt chrome	green	44-702.25.010	6	2	1	0,030
		1 NC + 1 NO	plastic matt chrome	black	44-702.20.100	5	2	1	0,037

contacts : normally closed = NC, normally open = NO, 1 normally closed = 1 NC, 1 normally open = 1 NO

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

illuminated pushbutton complete for marking



 filament lamp page 329

 LED page 329

	switching action	contacts	front ring	colour of lens	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
illuminated pushbutton complete for marking	momentary action	1 NO	plastic matt chrome	yellow	44-746.24.010	8	3	1	0,040
				green	44-746.25.010	8	3	1	0,040
		1 NC	plastic matt chrome	red	44-746.22.001	7	3	1	0,040
	maintained action	1 NC + 1 NO	plastic matt chrome	white	44-746.29.100	9	3	1	0,047
		1 NO	plastic matt chrome	green	44-747.25.010	10	3	1	0,040
		1 NC + 1 NO	plastic matt chrome	white	44-747.29.100	11	3	1	0,047

contacts : 1 normally closed = 1 NC, 1 normally open = 1 NO, normally closed = NC, normally open = NO

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

emergency stop switch complete



	unlocking	switching action	contacts	50 mm dia. Typ-Nr.	37 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
emergency stop switch complete red mushroom-head cap, yellow shaft	twist to release	MA	1 NC	44-710.001		12	4	2	0,057
foolproof, red mushroom-head cap, yellow shaft standard lock 9500	twist to release	MA	1 NC		44-712.001	12	5	2	0,047
	key to release	MA	1 NC		44-713.001	12	5	2	0,083

switching action : maintained action = MA

contacts : 1 normally closed = 1 NC

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

key lock complete 2 positions



	switching action	contacts	key removable in	front ring	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
key lock complete 2 positions position 0: basic position position I: maintained action standard lock 9500	MA	1 NC + 1 NO	0	plastic matt chrome	44-730.21.100	13	6	1	0,075
			0-I	plastic matt chrome	44-730.22.100	13	6	1	0,075

switching action : maintained action = MA

contacts : normally closed = NC, normally open = NO

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

key lock complete 3 positions



	switching action	contacts	key removable in	front ring	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
key lock complete 3 positions position 0: basic position position I + II: maintained action standard lock 9500	maintained - 0 - maintained	2 NO	I-0-II	plastic matt chrome	44-734.25.020	14	7	1	0,078

switching action

contacts : normally open = NO

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

selector switch complete 2 positions



	switching action	contacts	lever	front ring	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
selector switch complete 2 positions position 0: basic position position I: maintained action	MA	1 NC + 1 NO	black	plastic matt chrome	44-720.20.100	15	8	1	0,045

switching action : maintained action = MA

contacts : normally closed = NC, normally open = NO

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

selector switch complete 3 positions



	switching action	contacts	lever	front ring	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
selector switch complete 3 positions position 0: basic position position I + II: maintained action	maintained - 0 - maintained	1 NO + 1 NO	black	plastic matt chrome	44-724.20.020	16	9	1	0,048

switching action : maintained action = MA

contacts : normally open = NO

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

control switch



	Funcio	Contacts	Color of Operating part	Ø 22,5 mm Typ-Nr.	
Control Switch 2 positions without latch position	I	2x 1 NC + 1 NO	black	44-800.2	0,048
Control Switch 4 positions without latch position	I	4x 1 NC + 1 NO	black	44-800.4	0,048
Control Switch 8 positions without latch position without lever guidance (omni directional)	I	4x 1 NC + 1 NO	black	44-800.8	0,048

indicator actuator, full face illumination not for marking



- 🛒 filament lamp page 329
- 🛒 LED page 329
- 🛒 front adapter page 327
- 🛒 lamp element for front mounting page 328
- 🛒 base adaptor page 328
- 🛒 lamp for base mounting page 329

	front ring	colour of lens	28.2 mm dia. Typ-Nr.	technical drawing mounting dimensions		
indicator actuator, full face illumination not for marking	plastic matt grey	blue	44-750.66	10	1	0,008
		colourless, clear	44-750.67	10	1	0,008
		yellow	44-750.64	10	1	0,008
		green	44-750.65	10	1	0,008
		red	44-750.62	10	1	0,008
	plastic matt chrome	blue	44-750.26	10	1	0,008
		colourless, clear	44-750.27	10	1	0,008
		yellow	44-750.24	10	1	0,008
		green	44-750.25	10	1	0,008
		red	44-750.22	10	1	0,008

technical drawings from page 334, mounting dimensions from page 347

indicator actuator, front illumination for flush mounting for marking



- 🛒 filament lamp page 329
- 🛒 LED page 329
- 🛒 front adapter page 327
- 🛒 lamp element for front mounting page 328
- 🛒 base adaptor page 328
- 🛒 lamp for base mounting page 329

	front ring	colour of lens	28.2 mm dia. Typ-Nr.	technical drawing	mounting dimensions	
indicator actuator, front illumination for flush mounting for marking	plastic matt grey	blue	44-751.66	11	1	0,007
		yellow	44-751.64	11	1	0,007
		green	44-751.65	11	1	0,007
		red	44-751.62	11	1	0,007
		white	44-751.69	11	1	0,007
	plastic matt chrome	blue	44-751.26	11	1	0,007
		yellow	44-751.24	11	1	0,007
		green	44-751.25	11	1	0,007
		red	44-751.22	11	1	0,007
		white	44-751.29	11	1	0,007

technical drawings from page 334, mounting dimensions from page 347

pushbutton actuator not for marking



- front adapter page 327
- slow-make switching element stackable for front mounting page 327
- slow-make switching element not stackable for front mounting page 328
- base adaptor page 328
- slow-make switching element not stackable for base mounting page 328

	construction	switching action	front ring	colour of lens	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
pushbutton actuator not for marking	front ring flush	M	plastic matt grey	blue	44-701.66	17	12	1	0,013
				yellow	44-701.64	17	12	1	0,013
				green	44-701.65	17	12	1	0,013
				red	44-701.62	17	12	1	0,013
				black	44-701.60	17	12	1	0,013
				white	44-701.69	17	12	1	0,013
			plastic matt chrome	blue	44-701.26	17	12	1	0,013
				yellow	44-701.24	17	12	1	0,013
				green	44-701.25	17	12	1	0,013
				red	44-701.22	17	12	1	0,013
				black	44-701.20	17	12	1	0,013
				white	44-701.29	17	12	1	0,013
	front ring raised	M	plastic matt grey	blue	44-703.66	17	12	1	0,015
				yellow	44-703.64	17	12	1	0,015
				green	44-703.65	17	12	1	0,015
				red	44-703.62	17	12	1	0,015
				black	44-703.60	17	12	1	0,015
				white	44-703.69	17	12	1	0,015
			plastic matt chrome	blue	44-703.26	17	12	1	0,015
				yellow	44-703.24	17	12	1	0,015
				green	44-703.25	17	12	1	0,015
				red	44-703.22	17	12	1	0,015
				black	44-703.20	17	12	1	0,015
				white	44-703.29	17	12	1	0,015
	with knob high	M	plastic matt grey	blue	44-704.66	17	12	1	0,015
				yellow	44-704.64	17	12	1	0,015
				green	44-704.65	17	12	1	0,015
				red	44-704.62	17	12	1	0,015
				black	44-704.60	17	12	1	0,015
				white	44-704.69	17	12	1	0,015
			plastic matt chrome	blue	44-704.26	17	12	1	0,015
				yellow	44-704.24	17	12	1	0,015
				green	44-704.25	17	12	1	0,015
				red	44-704.22	17	12	1	0,015
				black	44-704.20	17	12	1	0,015
				white	44-704.29	17	12	1	0,015

Continued on next page

	construction	switching action	front ring	colour of lens	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
up to 3 switching elements max.	front ring flush	MA	plastic matt grey	blue	44-702.66	18	12	1	0,013
				yellow	44-702.64	18	12	1	0,013
				green	44-702.65	18	12	1	0,013
				red	44-702.62	18	12	1	0,013
				black	44-702.60	18	12	1	0,013
				white	44-702.69	18	12	1	0,013
			plastic matt chrome	blue	44-702.26	18	12	1	0,013
				yellow	44-702.24	18	12	1	0,013
				green	44-702.25	18	12	1	0,013
				red	44-702.22	18	12	1	0,013
				black	44-702.20	18	12	1	0,013
				white	44-702.29	18	12	1	0,013
	front ring raised	MA	plastic matt grey	blue	44-705.66	18	12	1	0,015
				yellow	44-705.64	18	12	1	0,015
				green	44-705.65	18	12	1	0,015
				red	44-705.62	18	12	1	0,015
				black	44-705.60	18	12	1	0,015
				white	44-705.69	18	12	1	0,015
			plastic matt chrome	blue	44-705.26	18	12	1	0,015
				yellow	44-705.24	18	12	1	0,015
				green	44-705.25	18	12	1	0,015
				red	44-705.22	18	12	1	0,015
				black	44-705.20	18	12	1	0,015
				white	44-705.29	18	12	1	0,015
	with knob high	MA	plastic matt grey	blue	44-706.66	18	12	1	0,015
				yellow	44-706.64	18	12	1	0,015
				green	44-706.65	18	12	1	0,015
				red	44-706.62	18	12	1	0,015
				black	44-706.60	18	12	1	0,015
				white	44-706.69	18	12	1	0,015
			plastic matt chrome	blue	44-706.26	18	12	1	0,015
				yellow	44-706.24	18	12	1	0,015
				green	44-706.25	18	12	1	0,015
				red	44-706.22	18	12	1	0,015
				black	44-706.20	18	12	1	0,015
				white	44-706.29	18	12	1	0,015

switching action : momentary action = M, maintained action = MA

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

pushbutton actuator for marking

colour of lens is determined by the colour of text plate



- shopping cart marking plate page 322
- shopping cart front adapter page 327
- shopping cart slow-make switching element stackable for front mounting page 327
- shopping cart slow-make switching element not stackable for front mounting page 328
- shopping cart base adaptor page 328
- shopping cart slow-make switching element not stackable for base mounting page 328

	switching action	front ring	colour of lens	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
pushbutton actuator for marking	M	plastic matt grey	clear	44-701.67	17	13	1	0,012
		plastic matt chrome	clear	44-701.27	17	13	1	0,012
up to 3 switching elements max.	MA	plastic matt grey	clear	44-702.67	18	13	1	0,012
		plastic matt chrome	clear	44-702.27	18	13	1	0,012

switching action : momentary action = M, maintained action = MA
circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

illuminated pushbutton actuator for marking



- 🛒 filament lamp page 329
- 🛒 LED page 329
- 🛒 front adapter page 327
- 🛒 slow-make switching element stackable for front mounting page 327
- 🛒 slow-make switching element not stackable for front mounting page 328
- 🛒 lamp element for front mounting page 328
- 🛒 base adaptor page 328
- 🛒 slow-make switching element not stackable for base mounting page 328
- 🛒 lamp for base mounting page 329

	switching action	front ring	colour of lens	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
illuminated pushbutton actuator for marking	M	plastic matt grey	blue	44-746.66	19	14	1	0,012
			yellow	44-746.64	19	14	1	0,012
			green	44-746.65	19	14	1	0,012
			red	44-746.62	19	14	1	0,012
			white	44-746.69	19	14	1	0,012
		plastic matt chrome	blue	44-746.26	19	14	1	0,012
			yellow	44-746.24	19	14	1	0,012
			green	44-746.25	19	14	1	0,012
			red	44-746.22	19	14	1	0,012
			white	44-746.29	19	14	1	0,012
with text plate translucent white, up to max. 3 switching elements	MA	plastic matt grey	blue	44-747.66	20	14	1	0,012
			yellow	44-747.64	20	14	1	0,012
			green	44-747.65	20	14	1	0,012
			red	44-747.62	20	14	1	0,012
			white	44-747.69	20	14	1	0,012
		plastic matt chrome	blue	44-747.26	20	14	1	0,012
			yellow	44-747.24	20	14	1	0,012
			green	44-747.25	20	14	1	0,012
			red	44-747.22	20	14	1	0,012
			white	44-747.29	20	14	1	0,012

switching action : momentary action = M, maintained action = MA

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

double pushbutton actuator



- 🛒 filament lamp page 329
- 🛒 LED page 329
- 🛒 front adapter page 327
- 🛒 slow-make switching element stackable for front mounting page 327
- 🛒 slow-make switching element not stackable for front mounting page 328
- 🛒 lamp element for front mounting page 328
- 🛒 base adaptor page 328
- 🛒 slow-make switching element not stackable for base mounting page 328
- 🛒 lamp for base mounting page 329

	switching action				 29.5 x 56 mm Typ-Nr.	technical drawing		mounting dimensions	
double pushbutton actuator	M	marking	front bezel	colour of lens					
			plastic matt grey	green + red	44-771.6	15	3	0,018	
		plastic matt chrome	green + red	44-771.2	15	3	0,018		
		without	plastic matt grey	green + red	44-770.6	15	3	0,018	
plastic matt chrome	green + red		44-770.2	15	3	0,018			

switching action : momentary action = M
technical drawings from page 334, mounting dimensions from page 347

Arrangement of switching element corresponds to the designation of the front adaptor

Switching action

Red button pressed

Green button pressed

1	3	2

Switching element actuated

emergency stop switch actuator

up to 3 switching elements max. in 1. level



- 🛒 label for emergency stop switch page 331
- 🛒 front adapter page 327
- 🛒 slow-make switching element stackable for front mounting page 327
- 🛒 slow-make switching element not stackable for front mounting page 328
- 🛒 base adaptor page 328
- 🛒 slow-make switching element not stackable for base mounting page 328

		switching action	37 mm dia. Typ-Nr.	50 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
emergency stop switch actuator	unlocking	MA	44-711		21	16	2	0,035
	twist to release			44-710	21	16	2	0,040

switching action : maintained action = MA

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

emergency stop switch actuator foolproof

up to 3 switching elements max. in 1. level



- 🛒 label for emergency stop switch page 331
- 🛒 front adapter page 327
- 🛒 slow-make switching element stackable for front mounting page 327
- 🛒 slow-make switching element not stackable for front mounting page 328
- 🛒 base adaptor page 328
- 🛒 slow-make switching element not stackable for base mounting page 328

	unlocking	switching action	37 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
emergency stop switch actuator foolproof	twist to release	MA	44-712	21	17	2	0,040
as per EN 418, red mushroom-head cap, yellow shaft, unlocking in direction of arrow, standard lock 9500, other lock numbers on request	key to release	MA	44-713	21	17	2	0,066

switching action : maintained action = MA
circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

pushbutton actuator with mushroom-head cap



- 🛒 front adapter page 327
- 🛒 slow-make switching element stackable for front mounting page 327
- 🛒 slow-make switching element not stackable for front mounting page 328
- 🛒 base adaptor page 328
- 🛒 slow-make switching element not stackable for base mounting page 328

	switching action	front ring	colour of mushroom-head cap	50 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
pushbutton actuator with mushroom-head cap	M	plastic matt grey	green	44-707.65	17	18	2	0,028
			red	44-707.62	17	18	2	0,028
			black	44-707.60	17	18	2	0,028
		plastic matt chrome	green	44-707.25	17	18	2	0,028
			red	44-707.22	17	18	2	0,028
			black	44-707.20	17	18	2	0,028

switching action : momentary action = M

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

keylock switch actuator 2 positions


up to 3 switching elements max. in 1. level



- front adapter page 327
- slow-make switching element stackable for front mounting page 327
- slow-make switching element not stackable for front mounting page 328
- base adaptor page 328
- slow-make switching element not stackable for base mounting page 328

	switching action	key removable in	front ring	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
keylock switch actuator 2 positions	M	0	plastic matt grey	44-732.61	23	19	1	0,051
			plastic matt chrome	44-732.21	23	19	1	0,051
	MA	0	plastic matt grey	44-730.61	22	19	1	0,051
			plastic matt chrome	44-730.21	22	19	1	0,051
position 0: basic position position I: maintained action 90° standard lock 9500 other lock numbers on request		0 + I	plastic matt grey	44-730.62	22	19	1	0,051
			plastic matt chrome	44-730.22	22	19	1	0,051

switching action : maintained action = MA, momentary action = M
circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

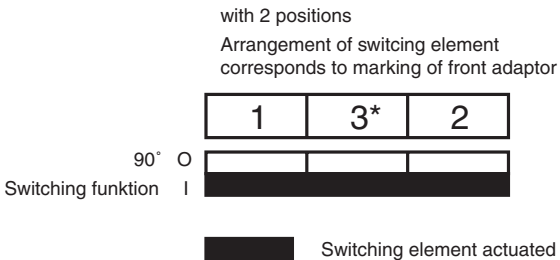

*By using of not stackable, switching elements please cover the outside positions 1 and 2 of frontadapter.

keylock switch actuator 3 positions

up to 3 switching elements max. in 1. level



- 🛒 front adapter page 327
- 🛒 slow-make switching element stackable for front mounting page 327
- 🛒 slow-make switching element not stackable for front mounting page 328
- 🛒 base adaptor page 328
- 🛒 slow-make switching element not stackable for base mounting page 328

	switching action	key removable in	front ring	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
 keylock switch actuator 3 positions	momentary - 0 - momentary	0	plastic matt grey	44-735.61	24	19	1	0,051
			plastic matt chrome	44-735.21	24	19	1	0,051
position 0: basic position position I + II: maintained action 60° standard lock 9500 other lock numbers on request	maintained - 0 - maintained	0	plastic matt grey	44-734.61	27	19	1	0,051
			plastic matt chrome	44-734.21	27	19	1	0,051
		0 + II	plastic matt grey	44-734.64	27	19	1	0,051
			plastic matt chrome	44-734.24	27	19	1	0,051
		I + 0	plastic matt grey	44-734.63	27	19	1	0,051
			plastic matt chrome	44-734.23	27	19	1	0,051
		I + 0 + II	plastic matt grey	44-734.65	27	19	1	0,051
			plastic matt chrome	44-734.25	27	19	1	0,051
position 0: basic position position I: momentary action 60° position II: maintained action 60° standard lock 9500 other lock numbers on request	momentary - 0 - maintained	0	plastic matt grey	44-737.61	26	19	1	0,051
			plastic matt chrome	44-737.21	26	19	1	0,051
		0 + II	plastic matt grey	44-737.64	26	19	1	0,051
			plastic matt chrome	44-737.24	26	19	1	0,051
position 0: basic position position I: maintained action 60° position II: momentary action 60° standard lock 9500 other lock numbers on request	maintained - 0 - momentary	0	plastic matt grey	44-736.61	25	19	1	0,051
			plastic matt chrome	44-736.21	25	19	1	0,051
		I + 0	plastic matt grey	44-736.63	25	19	1	0,051
			plastic matt chrome	44-736.23	25	19	1	0,051

switching action: maintained action = MA, momentary action = M, 0 = basic position

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

with 3 positions

Arrangement of switching element corresponds to marking of front adaptor

	1	3*	2
I			
O			
II			

Switching function 2x60°

Switching element actuated

*By using of not stackable, switching elements please cover the outside positions 1 and 2 of frontadapter.

selector switch actuator 2 positions

up to 3 switching elements max. in 1. level



- front adaptor page 327
- slow-make switching element stackable for front mounting page 327
- slow-make switching element not stackable for front mounting page 328
- base adaptor page 328
- slow-make switching element not stackable for base mounting page 328

	switching action	lever	front ring	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
selector switch actuator 2 positions	M	grey	plastic matt grey	44-722.68	29	20	1	0,021
		black	plastic matt chrome	44-722.20	29	20	1	0,021
position 0: basic position position I: maintained action 90°	MA	grey	plastic matt grey	44-720.68	28	20	1	0,021
		red	plastic matt grey	44-720.62	28	20	1	0,021
		plastic matt chrome	44-720.22	28	20	1	0,021	
		black	plastic matt chrome	44-720.20	28	20	1	0,021

switching action : maintained action = MA, momentary action = M
circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

with 2 positions
Arrangement of switching element
corresponds to marking of front adaptor

1	3*	2
90° O		
Switching function I		

Switching element actuated

*By using of not stockable, switching elements please cover the outside positions 1 and 2 of frontadapter..

selector switch actuator 3 positions


up to 3 switching elements max. in 1. level



- 🛒 front adapter page 327
- 🛒 slow-make switching element stackable for front mounting page 327
- 🛒 slow-make switching element not stackable for front mounting page 328
- 🛒 base adaptor page 328
- 🛒 slow-make switching element not stackable for base mounting page 328

	switching action	lever	front ring	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions		
	momentary - 0 - momentary	grey	plastic matt grey	44-725.68	31	20	1	0,021	
		black	plastic matt chrome	44-725.20	31	20	1	0,021	
position 0: basic position position I + II: maintained action 60°	maintained - 0 - maintained	grey	plastic matt grey	44-724.68	30	20	1	0,021	
		black	plastic matt chrome	44-724.20	30	20	1	0,021	
position 0: basic position position I: momentary action 60° position II: maintained action 60°	momentary - 0 - maintained	grey	plastic matt grey	44-727.68	33	20	1	0,021	
		black	plastic matt chrome	44-727.20	33	20	1	0,021	
position 0: basic position position I: maintained action 60° position II: momentary action 60°	maintained - 0 - momentary	grey	plastic matt grey	44-726.68	32	20	1	0,021	
		black	plastic matt chrome	44-726.20	32	20	1	0,021	

switching action: maintained action = MA, momentary action = M, 0 = basic position
circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

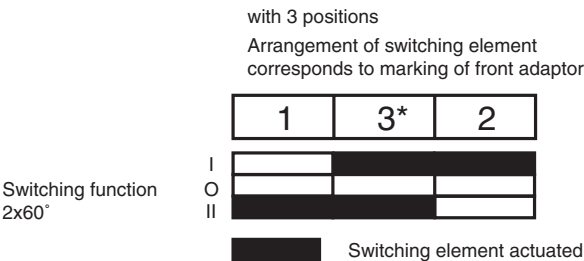

*By using of not stockable, switching elements please cover the outside positions 1 and 2 of frontadapter.

interlocking pushbutton actuator

up to 3 switching elements max. in 1. level



- 🛒 front adapter page 327
- 🛒 slow-make switching element stackable for front mounting page 327
- 🛒 slow-make switching element not stackable for front mounting page 328
- 🛒 base adaptor page 328
- 🛒 slow-make switching element not stackable for base mounting page 328

	front ring	colour of rotation knob	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
interlocking pushbutton actuator	plastic matt grey	grey	44-742.68	34	21	1	0,020
		red	44-742.62	34	21	1	0,020
	plastic matt chrome	red	44-742.22	34	21	1	0,020
		black	44-742.20	34	21	1	0,020

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

potentiometer-drive



	construction	front ring	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
potentiometer-drive	without potentiometer	plastic matt grey	44-744.60		22	1	0,016
		plastic matt chrome	44-744.20		22	1	0,016
standard 10 kOhm others on request, resistance value as per IEC 63, series E3	with potentiometer 10 kΩ	plastic matt grey	44-745.60-10K1	35	22	1	0,030
		plastic matt chrome	44-745.20-10K1	35	22	1	0,030

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

enclosure fitted with pushbuttons

for each mounting place 2 switching elements, 1 normally closed + 1 normally open



	fitting	switching action	symbol on the lens	colour of housing	72 x 84 mm Typ-Nr.	72 x 117 mm Typ-Nr.	technical drawing	
enclosure fitted with pushbuttons	1 pushbutton green	M	mom	light grey	44-001.8-01		23	0,205
	1 pushbutton red	M	0	light grey	44-001.8-02		23	0,206
	2 pushbuttons green + red	M	green: I; red: 0	light grey		44-002.8-04	23	0,247

switching action : momentary action = M

technical drawings from page 334

enclosure fitted with emergency stop switch

for each mounting place 2 switching elements, 1 normally closed + 1 normally open



	fitting	unlocking	switching action	colour of housing	72 x 84 mm Typ-Nr.	technical drawing	
enclosure fitted with emergency stop switch front protection IP 65	1 emergency stop switch foolproof 37 mm dia.	twist to release	MA	yellow	44-001.4-05	23	0,234
	1 emergency stop switch 50 mm dia.	twist to release	MA	yellow	44-001.4-03	23	0,234

switching action : maintained action = MA

technical drawings from page 334

indicator actuator full face illumination for flush mounting not for marking



- filament lamp page 329
- LED page 329
- front bezel set for flush mounting without label support page 322
- front bezel set for flush mounting with label support page 323
- label for front bezel set for flush mounting with label support page 323
- front adapter page 327
- lamp element for front mounting page 328
- base adaptor page 328
- lamp for base mounting page 329

	front ring	colour of lens	28.2 mm dia. Typ-Nr.	technical drawing		mounting dimensions	
indicator actuator full face illumination for flush mounting not for marking	plastic matt grey	blue	44-750.66	24	4	0,008	
		colourless, clear	44-750.67	24	4	0,008	
		yellow	44-750.64	24	4	0,008	
		green	44-750.65	24	4	0,008	
		red	44-750.62	24	4	0,008	
	plastic matt chrome	blue	44-750.26	24	4	0,008	
		colourless, clear	44-750.27	24	4	0,008	
		yellow	44-750.24	24	4	0,008	
		green	44-750.25	24	4	0,008	
		red	44-750.22	24	4	0,008	

technical drawings from page 334, mounting dimensions from page 347

indicator actuator, front illumination for flush mounting for marking



- filament lamp page 329
- LED page 329
- front bezel set for flush mounting without label support page 322
- front bezel set for flush mounting with label support page 323
- front adapter page 327
- lamp element for front mounting page 328
- base adaptor page 328
- lamp for base mounting page 329

indicator actuator, front illumination for flush mounting for marking	front ring	colour of lens	28.2 mm dia. Typ-Nr.	technical drawing		
				mounting dimensions		
indicator actuator, front illumination for flush mounting for marking	plastic matt grey	blue	44-751.66	24	4	0,007
		yellow	44-751.64	24	4	0,007
		green	44-751.65	24	4	0,007
		red	44-751.62	24	4	0,007
		white	44-751.69	24	4	0,007
	plastic matt chrome	blue	44-751.26	24	4	0,007
		yellow	44-751.24	24	4	0,007
		green	44-751.25	24	4	0,007
		red	44-751.22	24	4	0,007
		white	44-751.29	24	4	0,007

technical drawings from page 334, mounting dimensions from page 347

pushbutton actuator for flush mounting not for marking



- 🛒 front bezel set for flush mounting without label support page 322
- 🛒 front bezel set for flush mounting with label support page 323
- 🛒 label for front bezel set for flush mounting with label support page 323
- 🛒 front adapter page 327
- 🛒 slow-make switching element stackable for front mounting page 327
- 🛒 slow-make switching element not stackable for front mounting page 328
- 🛒 base adaptor page 328
- 🛒 slow-make switching element not stackable for base mounting page 328

	construction	switching action	front ring	colour of lens	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
pushbutton actuator for flush mounting not for marking	front ring flush	M	plastic matt grey	blue	44-701.66	17	25	4	0,013
				yellow	44-701.64	17	25	4	0,013
				green	44-701.65	17	25	4	0,013
				red	44-701.62	17	25	4	0,013
				black	44-701.60	17	25	4	0,013
				white	44-701.69	17	25	4	0,013
			plastic matt chrome	blue	44-701.26	17	25	4	0,013
				yellow	44-701.24	17	25	4	0,013
				green	44-701.25	17	25	4	0,013
				red	44-701.22	17	25	4	0,013
				black	44-701.20	17	25	4	0,013
				white	44-701.29	17	25	4	0,013
	front ring raised	M	plastic matt grey	blue	44-703.66	17	25	4	0,015
				yellow	44-703.64	17	25	4	0,015
				green	44-703.65	17	25	4	0,015
				red	44-703.62	17	25	4	0,015
				black	44-703.60	17	25	4	0,015
				white	44-703.69	17	25	4	0,015
			plastic matt chrome	blue	44-703.26	17	25	4	0,015
				yellow	44-703.24	17	25	4	0,015
				green	44-703.25	17	25	4	0,015
				red	44-703.22	17	25	4	0,015
				black	44-703.20	17	25	4	0,015
				white	44-703.29	17	25	4	0,015

Continued on next page

	construction	switching action	front ring	colour of lens	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
pushbutton actuator for flush mounting not for marking	with knob high	M	plastic matt grey	blue	44-704.66	17	25	4	0,015
				yellow	44-704.64	17	25	4	0,015
				green	44-704.65	17	25	4	0,015
				red	44-704.62	17	25	4	0,015
				black	44-704.60	17	25	4	0,015
				white	44-704.69	17	25	4	0,015
			plastic matt chrome	blue	44-704.26	17	25	4	0,015
				yellow	44-704.24	17	25	4	0,015
				green	44-704.25	17	25	4	0,015
				red	44-704.22	17	25	4	0,015
				black	44-704.20	17	25	4	0,015
				white	44-704.29	17	25	4	0,015
up to 3 switching elements max.	front ring flush	MA	plastic matt grey	blue	44-702.66	18	25	4	0,013
				yellow	44-702.64	18	25	4	0,013
				green	44-702.65	18	25	4	0,013
				red	44-702.62	18	25	4	0,013
				black	44-702.60	18	25	4	0,013
				white	44-702.69	18	25	4	0,013
			plastic matt chrome	blue	44-702.26	18	25	4	0,013
				yellow	44-702.24	18	25	4	0,013
				green	44-702.25	18	25	4	0,013
				red	44-702.22	18	25	4	0,013
				black	44-702.20	18	25	4	0,013
				white	44-702.29	18	25	4	0,013
	front ring raised	MA	plastic matt grey	blue	44-705.66	18	25	4	0,015
				yellow	44-705.64	18	25	4	0,015
				green	44-705.65	18	25	4	0,015
				red	44-705.62	18	25	4	0,015
				black	44-705.60	18	25	4	0,015
				white	44-705.69	18	25	4	0,015
			plastic matt chrome	blue	44-705.26	18	25	4	0,015
				yellow	44-705.24	18	25	4	0,015
				green	44-705.25	18	25	4	0,015
				red	44-705.22	18	25	4	0,015
				black	44-705.20	18	25	4	0,015
				white	44-705.29	18	25	4	0,015
	with knob high	MA	plastic matt grey	blue	44-706.66	18	25	4	0,015
				yellow	44-706.64	18	25	4	0,015
				green	44-706.65	18	25	4	0,015
				red	44-706.62	18	25	4	0,015
				black	44-706.60	18	25	4	0,015
				white	44-706.69	18	25	4	0,015
			plastic matt chrome	blue	44-706.26	18	25	4	0,015
				yellow	44-706.24	18	25	4	0,015
				green	44-706.25	18	25	4	0,015
				red	44-706.22	18	25	4	0,015
				black	44-706.20	18	25	4	0,015
				white	44-706.29	18	25	4	0,015

switching action : momentary action = M, maintained action = MA

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

pushbutton actuator for flush mounting for marking

colour of lens is determined by the colour of text plate



- shopping cart marking plate page 322
- shopping cart front bezel set for flush mounting without label support page 322
- shopping cart front bezel set for flush mounting with label support page 323
- shopping cart label for front bezel set for flush mounting with label support page 323
- shopping cart front adapter page 327
- shopping cart slow-make switching element stackable for front mounting page 327
- shopping cart slow-make switching element not stachable for front mounting page 328
- shopping cart base adaptor page 328
- shopping cart slow-make switching element not stackable for base mounting page 328

	switching action	front ring	colour of lens	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
pushbutton actuator for flush mounting for marking	M	plastic matt grey	clear	44-701.67	17	26	4	0,012
		plastic matt chrome	clear	44-701.27	17	26	4	0,012
up to 3 switching elements max.	MA	plastic matt grey	clear	44-702.67	18	26	4	0,012
		plastic matt chrome	clear	44-702.27	18	26	4	0,012

switching action : momentary action = M, maintained action = MA
circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

illuminated pushbutton actuator for flush mounting for marking



- 🛒 filament lamp page 329
- 🛒 LED page 329
- 🛒 front bezel set for flush mounting without label support page 322
- 🛒 front bezel set for flush mounting with label support page 323
- 🛒 label for front bezel set for flush mounting with label support page 323
- 🛒 front adapter page 327
- 🛒 slow-make switching element stackable for front mounting page 327
- 🛒 slow-make switching element not stackable for front mounting page 328
- 🛒 lamp element for front mounting page 328
- 🛒 base adaptor page 328
- 🛒 slow-make switching element not stackable for base mounting page 328
- 🛒 lamp for base mounting page 329

	switching action	front ring	colour of lens	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
illuminated pushbutton actuator for flush mounting for marking	M	plastic matt grey	blue	44-746.66	19	26	4	0,012
			yellow	44-746.64	19	26	4	0,012
			green	44-746.65	19	26	4	0,012
			red	44-746.62	19	26	4	0,012
			white	44-746.69	19	26	4	0,012
		plastic matt chrome	blue	44-746.26	19	26	4	0,012
			yellow	44-746.24	19	26	4	0,012
			green	44-746.25	19	26	4	0,012
			red	44-746.22	19	26	4	0,012
			white	44-746.29	19	26	4	0,012
with text plate translucent white, up to max. 3 switching elements	MA	plastic matt grey	blue	44-747.66	20	26	4	0,012
			yellow	44-747.64	20	26	4	0,012
			green	44-747.65	20	26	4	0,012
			red	44-747.62	20	26	4	0,012
			white	44-747.69	20	26	4	0,012
		plastic matt chrome	blue	44-747.26	20	26	4	0,012
			yellow	44-747.24	20	26	4	0,012
			green	44-747.25	20	26	4	0,012
			red	44-747.22	20	26	4	0,012
			white	44-747.29	20	26	4	0,012

switching action : momentary action = M, maintained action = MA


circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

keylock switch actuator 2 positions for flush mounting


up to 3 switching elements max. in 1. level



- front bezel set for flush mounting without label support page 322
- front bezel set for flush mounting with label support page 323
- label for front bezel set for flush mounting with label support page 323
- front adaptor page 327
- slow-make switching element stackable for front mounting page 327
- slow-make switching element not stackable for front mounting page 328
- base adaptor page 328
- slow-make switching element not stackable for base mounting page 328

	switching action	key removable in	front ring	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
keylock switch actuator 2 positions for flush mounting	M	0	plastic matt grey	44-732.61	23	27	4	0,051
			plastic matt chrome	44-732.21	23	27	4	0,051
position 0: basic position position I: maintained action 90° standard lock 9500 other lock numbers on request	MA	0	plastic matt grey	44-730.61	22	27	4	0,051
			plastic matt chrome	44-730.21	22	27	4	0,051
		0 + I	plastic matt grey	44-730.62	22	27	4	0,051
			plastic matt chrome	44-730.22	22	27	4	0,051

switching action : maintained action = MA, momentary action = M
circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

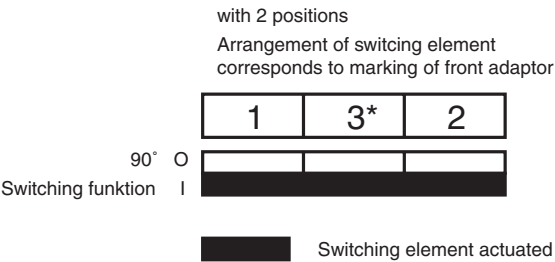


*By using of not stockable, switching elements please cover the outside positions 1 and 2 of frontadaptor.

keylock switch actuator 3 positions for flush mounting

up to 3 switching elements max. in 1. level




- 🔑 front bezel set for flush mounting without label support page 322
- 🔑 front bezel set for flush mounting with label support page 323
- 🔑 label for front bezel set for flush mounting with label support page 323
- 🔑 front adaptor page 327
- 🔑 slow-make switching element stackable for front mounting page 327
- 🔑 slow-make switching element not stackable for front mounting page 328
- 🔑 base adaptor page 328
- 🔑 slow-make switching element not stackable for base mounting page 328

	switching action	key removable in	front ring	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
keylock switch actuator 3 positions for flush mounting	momentary - 0 - momentary	0	plastic matt grey	44-735.61	24	27	4	0,051
			plastic matt chrome	44-735.21	24	27	4	0,051
position 0: basic position position I + II: maintained action 60° standard lock 9500 other lock numbers on request	maintained - 0 - maintained	0	plastic matt grey	44-734.61	27	27	4	0,051
			plastic matt chrome	44-734.21	27	27	4	0,051
		0 + II	plastic matt grey	44-734.64	27	27	4	0,051
			plastic matt chrome	44-734.24	27	27	4	0,051
		I + 0	plastic matt grey	44-734.63	27	27	4	0,051
			plastic matt chrome	44-734.23	27	27	4	0,051
position 0: basic position position I: momentary action 60° position II: maintained action 60° standard lock 9500 other lock numbers on request	momentary - 0 - maintained	0	plastic matt grey	44-737.61	26	27	4	0,051
			plastic matt chrome	44-737.21	26	27	4	0,051
		0 + II	plastic matt grey	44-737.64	26	27	4	0,051
			plastic matt chrome	44-737.24	26	27	4	0,051
		I + 0	plastic matt grey	44-736.61	25	27	4	0,051
			plastic matt chrome	44-736.21	25	27	4	0,051
position 0: basic position position I: maintained action 60° position II: momentary action 60° standard lock 9500 other lock numbers on request	maintained - 0 - momentary	0	plastic matt grey	44-736.61	25	27	4	0,051
			plastic matt chrome	44-736.21	25	27	4	0,051
		I + 0	plastic matt grey	44-736.63	25	27	4	0,051
			plastic matt chrome	44-736.23	25	27	4	0,051

switching action: maintained action = MA, momentary action = M, 0 = basic position


circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

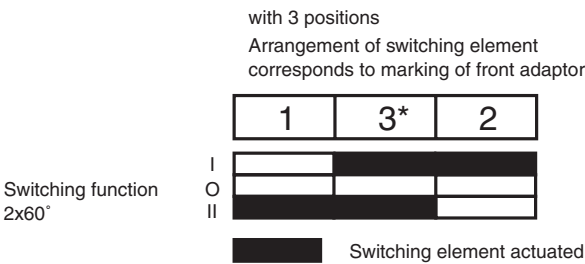

*By using of not stockable, switching elements please cover the outside positions 1 and 2 of frontadaptor.

selector switch actuator 2 positions for flush mounting


up to 3 switching elements max. in 1. level

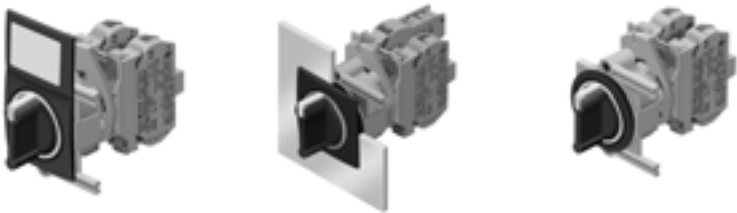

- front bezel set for flush mounting without label support page 322
- front bezel set for flush mounting with label support page 323
- label for front bezel set for flush mounting with label support page 323
- front adaptor page 327
- slow-make switching element stackable for front mounting page 327
- slow-make switching element not stachable for front mounting page 328
- base adaptor page 328
- slow-make switching element not stackable for base mounting page 328

	switching action				circuit drawing	technical drawing	mounting dimensions	
		lever	front ring	28.2 mm dia. Typ-Nr.				
selector switch actuator 2 positions for flush mounting	M	grey	plastic matt grey	44-722.68	29	28	4	0,021
		black	plastic matt chrome	44-722.20	29	28	4	0,021
position 0: basic position position I: maintained action 90°	MA	grey	plastic matt grey	44-720.68	28	28	4	0,021
		red	plastic matt grey	44-720.62	28	28	4	0,021
			plastic matt chrome	44-720.22	28	28	4	0,021
		black	plastic matt chrome	44-720.20	28	28	4	0,021

switching action : maintained action = MA, momentary action = M
circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

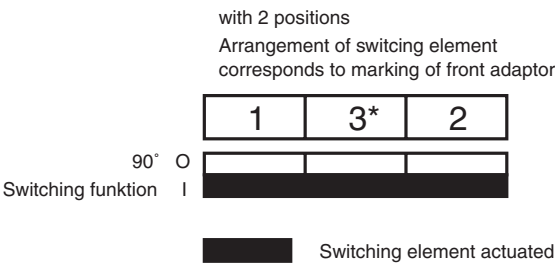

*By using of not stockable, switching elements please cover the outside positions 1 and 2 of frontadaptor.

selector switch actuator 3 positions for flush mounting


up to 3 switching elements max. in 1. level



- front bezel set for flush mounting without label support page 322
- front bezel set for flush mounting with label support page 323
- label for front bezel set for flush mounting with label support page 323
- front adapter page 327
- slow-make switching element stackable for front mounting page 327
- slow-make switching element not stackable for front mounting page 328
- base adaptor page 328
- slow-make switching element not stackable for base mounting page 328

	switching action	lever		front ring	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
		grey	black						
selector switch actuator 3 positions for flush mounting	momentary - 0 - momentary	matt grey	matt chrome	44-725.68	31	28	4	0,021	
				44-725.20	31	28	4	0,021	
position 0: basic position position I + II: maintained action 60°	maintained - 0 - maintained	matt grey	matt chrome	44-724.68	30	28	4	0,021	
				44-724.20	30	28	4	0,021	
position 0: basic position position I: momentary action 60° position II: maintained action 60°	momentary - 0 - maintained	matt grey	matt chrome	44-727.68	33	28	4	0,021	
				44-727.20	33	28	4	0,021	
position 0: basic position position I: maintained action 60° position II: momentary action 60°	maintained - 0 - momentary	matt grey	matt chrome	44-726.68	32	28	4	0,021	
				44-726.20	32	28	4	0,021	

switching action: : maintained action = MA, momentary action = M, 0 = basic position
circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

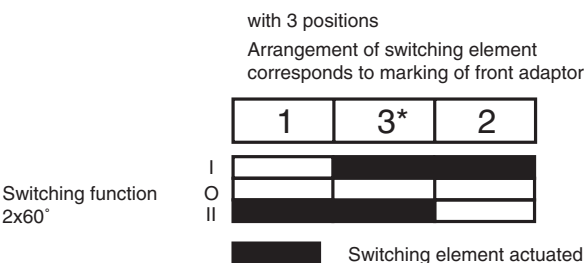

* By using of not stockable, switching elements please cover the outside positions 1 and 2 of frontadaptor.

interlocking pushbutton actuator for flush mounting

up to 3 switching elements max. in 1. level



- front bezel set for flush mounting without label support page 322
- front bezel set for flush mounting with label support page 323
- label for front bezel set for flush mounting with label support page 323
- front adapter page 327
- slow-make switching element stackable for front mounting page 327
- slow-make switching element not stackable for front mounting page 328
- base adaptor page 328
- slow-make switching element not stackable for base mounting page 328

				circuit drawing	technical drawing	mounting dimensions	
	front ring	colour of rotation knob	28.2 mm dia. Typ-Nr.				
interlocking pushbutton actuator for flush mounting	plastic matt grey	grey	44-742.68	34	29	4	0,020
		red	44-742.62	34	29	4	0,020
	plastic matt chrome	red	44-742.22	34	29	4	0,020
		black	44-742.20	34	29	4	0,020

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

potentiometer-drive for flush mounting



- 🛒 front bezel set for flush mounting without label support page 322
- 🛒 front bezel set for flush mounting with label support page 323
- 🛒 label for front bezel set for flush mounting with label support page 323

	construction	front ring	28.2 mm dia. Typ-Nr.	circuit drawing	technical drawing	mounting dimensions	
potentiometer-drive for flush mounting	without potentiometer	plastic matt grey	44-744.60		30	4	0,016
		plastic matt chrome	44-744.20		30	4	0,016
standard 10 kOhm others on request, resistance value as per IEC 63, series E3	with potentiometer 10 kΩ	plastic matt grey	44-745.60-10K1	35	30	4	0,030
		plastic matt chrome	44-745.20-10K1	35	30	4	0,030

circuit drawings from page 348, technical drawings from page 334, mounting dimensions from page 347

at front

lens

for illuminated version

	shape	lens	colour	28.2 mm dia. Typ-Nr.	
lens for indicator front illumination, illuminated pushbutton	flat	transparent	blue	44-966.6	0,001
			colourless, clear	44-966.7	0,001
			yellow	44-966.4	0,001
			green	44-966.5	0,001
			red	44-966.2	0,001



marking plate

	marking plate	colour	part no.	
marking plate for pushbutton for marking	opaque	blue	44-961.6	0,001
		yellow	44-961.4	0,001
		green	44-961.5	0,001
		red	44-961.2	0,001
		black	44-961.0	0,001
for pushbuttons for marking, illuminated pushbuttons, indicators front illumination	translucent	white	44-962.9	0,001

see inscription

front bezel set for flush mounting without label support

	use	material	colour	 36 x 36 mm Typ-Nr.	35.5 mm dia. Typ-Nr.	technical drawing	
front bezel set for flush mounting without label support	for illuminated-/pushbutton, selector- and keylock switch, interlocking pushbutton the mounting depth extends for 12 mm	plastic	black	44-946.03	44-946.03-A	31	0,010
	for indicator, potentiometer the mounting depth extends for 3 mm	plastic	black	44-946.01	44-946.01-A	31	0,006



technical drawings from page 334

front bezel set for flush mounting with label support

	use	material	colour	36 x 60 mm Typ-Nr.	technical drawing	
front bezel set for flush mounting with label support	for illuminated-/pushbutton, selector- and keylock switch, interlocking pushbutton the mounting depth extends for 12 mm	plastic	black	44-946.04	31	0,011
	for indicator, potentiometer the mounting depth extends for 3 mm	plastic	black	44-946.02	31	0,007



technical drawings from page 334

label for front bezel set for flush mounting with label support

	colour	27 x 18 mm Typ-Nr.	
label for front bezel set for flush mounting with label support of plastic, 2 layers (alu/black), autoadhesive	aluminium colourless	44-946	0,001
of plastic, 2 layers (black/white), autoadhesive	black	44-946.0	0,001



see inscription

lens cap

for indicator full face illumination

	lens cap	colour	part no.	
lens cap of plastic incl. sealing ring	transparent	blue	44-965.6	0,003
		colourless, clear	44-965.7	0,003
		yellow	44-965.4	0,003
		green	44-965.5	0,003
		red	44-965.2	0,003



lock cap

	colour	part no.	
lock cap Protection when used under adverse ambient conditions. Remove gasket from the actuator. Cannot be used with the label support.	grey	44-921.08	0,004
	black	44-921.00	0,004



legend plate

	30 x 60 mm Typ-Nr.	technical drawing	
legend plate aluminium anodized, for engraving, for protection IP 40	44-955	32	0,001



technical drawings from page 334

label for enclosure

		 19 x 19 mm Typ-Nr.	 kg
label for enclosure of plastic, aluminium plated, unmarked, adhesive	colour aluminium colourless	44-963	0,001



label for label support

		 13 x 26 mm Typ-Nr.	 kg
label for label support	colour aluminium anodized, black	44-960	0,001



see inscription

label support without label

label to be ordered separatly

		 29.5 x 49.5 mm Typ-Nr.	technical drawing	 kg
label support without label of plastic, remove sealing ring from actuator	colour grey black	44-944.08 44-944.00	33 33	0,002 0,002



technical drawings from page 334

label support with label

		 29.5 x 49.5 mm Typ-Nr.	technical drawing	 kg
label support with label of plastic, label unmarked, remove sealing ring from actuator	colour grey black	44-945.08 44-945.00	33 33	0,002 0,002



technical drawings from page 334

front ring

for illuminated-/pushbutton actuator

	material	colour	part no.	 kg
front ring	plastic	matt grey matt chrome	44-967.6 44-967.2	0,002 0,002



front ring raised

for pushbutton actuator

	material	colour	part no.	 kg
front ring raised	plastic	matt grey matt chrome	44-968.6 44-968.2	0,003 0,003



protective cover

only for pushbutton with front ring flush mounted

	part no.	technical drawing	
protective cover hinged, transparent, with means for sealing, front panel thickness up to 3 mm max. Remove anti-twisting nose at the actuator. Fits with types 44-701..., 44-702..., 44-746..., 44-747...	44-922	34	0,007



technical drawings from page 334

protective cap

only for pushbutton with front ring flush mounted

	colour	part no.	
protective cap silicone, protection when used under adverse ambient conditions, remove gasket from the actuator. Cannot be used with the label support.	colourless, transparent	44-917.07	0,002

**blind plug**

	colour	28.2 mm dia. Typ-Nr.	technical drawing	
blind plug lamp transformer can be mounted with front adaptor	grey	44-915	35	0,008



technical drawings from page 334

enclosure

incl. base adaptor for base mounting

	mounting spaces	colour	part no.	technical drawing	
enclosure	1 mounting place	light grey	44-001.8	23	0,175
	2 mounting places	light grey	44-002.8	23	0,199
	3 mounting places	light grey	44-003.8	23	0,252
	5 mounting places	light grey	44-005.8	23	0,332



technical drawings from page 334

cable gland PG 16

for enclosure

	part no.	
cable gland M 20 with nut and sealing fixing area 7...13 mm dia.	44-956	0,009



spare key

	part no.	
spare key for standard lock 9500, for other lock numbers complete the part no.	44-919	0,007



assembling

reducing ring

for mounting in 30.5 mm drill

	colour	part no.	
reducing ring	aluminium natural anodized	44-925	0,003



mounting tool

	part no.	
mounting tool for fixing nut, transparent lenses, lens caps and illumination	44-935	0,0



at back

front adapter

for front mounting

	use	part no.	technical drawing	kg
front adapter marked	for switching element with 1 contact element	44-901	36	0,007
	for switching element with 2 contact elements	44-902	36	0,007
	for switching element in 2 levels with 3 contact elements	44-903	36	0,007
not marked	for switching element/lamp element	44-900	36	0,007



technical drawings from page 334

Typ No.	Diagram
44-900	
44-901	
44-902	
44-903	

Frontadapter beschriftet: Ordnungsziffern für Anschlussbezeichnung nach DIN EN 50013, Funktionsziffern befinden sich auf den Schaltelementen neben den Schraubklemmanschlüssen.

slow-make switching element stackable for front mounting

for front adaptor

	contacts	material of contacts	connection method	part no.	circuit drawing	technical drawing	kg
slow-make switching element stackable for front mounting forced opening according IEC 947-5-1, DIN VDE 0660 or EN 60 947-5-1	1 NO	gold/silver	ST	44-162	36	37	0,014
		hard silver	ST	44-161	36	37	0,014
	1 NC	gold/silver	ST	44-152	38	37	0,014
		hard silver	ST	44-151	38	37	0,014
	1 NC + 1 NO	gold/silver	ST	44-132	37	37	0,017
		hard silver	ST	44-131	37	37	0,017
not to use with emergency stop switch	1 NC + 1 normally open, overlapping	hard silver	ST	44-141	39	37	0,017



circuit drawings from page 348, technical drawings from page 334

slow-make switching element not stachable for front mounting

for front adaptor

	contacts	material of contacts	connection method	part no.	circuit drawing	technical drawing	
slow-make switching element not stachable for front mounting sealing und spacer	1 NO	hard silver	ST	44-121	36	37	0,010
forced opening according IEC 947-5-1, DIN VDE 0660 or EN 60 947-5-1	1 NC	hard silver	ST	44-111	38	37	0,010



circuit drawings from page 348, technical drawings from page 334

lamp element for front mounting

	connection method	part no.	circuit drawing	technical drawing	
lamp element for front mounting lamp socket Ba9s, max. 2.6 W	ST	44-524	1	38	0,011



circuit drawings from page 348, technical drawings from page 334


base adaptor

	part no.	
base adaptor	44-905	0,006



Typ No. Diagram

44 - 905



slow-make switching element not stackable for base mounting

for base adaptor

	contacts	material of contacts	connection method	part no.	circuit drawing	technical drawing	
slow-make switching element not stackable for base mounting sealing und spacer	1 NO	hard silver	ST	44-221	36	39	0,010
forced opening according IEC 947-5-1, DIN VDE 0660 or EN 60 947-5-1	1 NC	hard silver	ST	44-211	38	39	0,010



circuit drawings from page 348, technical drawings from page 334

lamp for base mounting

	connection method	part no.	circuit drawing	technical drawing	kg
lamp for base mounting lamp socket Ba9s, max. 2.6 W	ST	44-525	1	40	0,011



circuit drawings from page 348, technical drawings from page 334

blind element

for mounting of lamp transformer

	part no.	technical drawing	kg
blind element	44-940	41	0,008



technical drawings from page 334

for illumination

Filament lamp

	voltage/current	part no.	kg
Filament lamp base Ba9s	6 VAC/DC/200 mA 1.2 W	10-1406.1369	0,002
	24 VAC/DC/50 mA 1.2 W	10-1412.1279	0,002
at spiral form 2 x CC - 2 F	110-130 VAC/DC/20 mA 2.4 W	10-1423.1179	0,002
at spiral form CC - 2 F	60 VAC/DC/20 mA 1.2 W	10-1420.1179	0,002



LED

	number of chips	voltage/current	colour	part no.	kg
LED base Ba9s Note: For optimal illumination we strongly recommend using our new single- chip LEDs. For new designs, only the new single-chip LEDs should be chosen. They can be found on page 669.	8	24 VDC/19 mA	yellow	10-6412.3164	0,003
			green	10-6412.3165	0,003
			red	10-6412.3162	0,003



resistor diode element

	number of diodes	alternating service voltage	mounting method	connection method	part no.	technical drawing	
resistor diode element for incandescent lamp 130 V/2.4 W 1 N 4007	1	Ue = 220-240 VAC	front or base	ST	44-614.11	42	0,009
	2	Ue = 220-240 VAC	front	ST	44-614.21	42	0,015
for incandescent lamp 60 V/1.2 W 1 N 4007	1	Ue = 110-125 VAC	front or base	ST	44-614.12	42	0,009
	2	Ue = 110-125 VAC	front	ST	44-614.22	42	0,015



technical drawings from page 334

diode element

	number of diodes	connection method	part no.	technical drawing	
diode element 1 N 4007, for front or base mounting	1	ST	44-612.1	42	0,009
	2	ST	44-612.2	42	0,011



technical drawings from page 334

lamp transformer

	operation voltage	connection method	part no.	technical drawing	
lamp transformer short-circuit proof, 1.2 VA, 50/60 Hz, for front or base mounting	125/24 V	ST	44-975	43	0,102
	125/6 V	ST	44-970	43	0,102
	230/24 V	ST	44-976	43	0,102
	230/6 V	ST	44-971	43	0,102
	400/24 V	ST	44-977	43	0,102
	400/6 V	ST	44-972	43	0,102



connection method: screw terminal = ST

screw terminal for primary connection, for secondary connection wire tails with core-end sleeves

technical drawings from page 334

capacitor

for lamp voltage reduction

	value	part no.	
capacitor use with 60 V/20 mA, 50 Hz lamp voltage	230 V/0.27 μ F	44-958.090	0,002



Please keep to the country specific security rules.

series resistor

for lamp voltage reduction

	value	part no.	
series resistor	230 V/6.8 kΩ	44-957.060	0,002
for incandescent lamp 110-130 V/2.4 W	110 V/2.7 kΩ	44-957.010	0,002
for incandescent lamp 60 V/1.2 W	125 V/3.3 kΩ	44-957.020	0,002
	145 V/4.7 kΩ	44-957.030	0,002
	230 V/8.2 kΩ	44-957.040	0,002
	240 V/10 kΩ	44-957.050	0,002




Please keep to the country specific security rules.

terminal plate empty

for fitting with series resistors and capacitors

	no. of spaces	part no.	
terminal plate empty	5 spaces 62.5 x 60 x 15 mm	44-959.05	0,025
	10 spaces 125 x 60 x 15 mm	44-959.10	0,045
	15 spaces 187.5 x 60 x 15 mm	44-959.15	0,090
	20 spaces 250 x 60 x 15 mm	44-959.20	0,106



for emergency stop switch

label for emergency stop switch

	marking	Ø 90 mm Typ-Nr.	Ø 60 mm Typ-Nr.	Ø 45 mm Typ-Nr.	
label for emergency stop switch	ARRET D'URGENCE	44-949.3			0,009
front protection IP 65 when protection foil is removed, yellow, self-adhesiv			44-950.3		0,004
				44-951.3	0,002
	Emergency Stop		44-950.2		0,004
				44-951.2	0,002
		44-949.2			0,009
	emergency stop	44-949.1			0,009
				44-951.1	0,002
			44-950.1		0,004
	without	44-949			0,009
			44-950		0,004
				44-951	0,002



enclosure for emergency stop switch

incl. base adaptor for base mounting

	mounting spaces	colour	part no.	technical drawing	
enclosure for emergency stop switch	1 mounting place	yellow	44-001.4	23	0,174



technical drawings from page 334

cable gland PG 16/M 20

for enclosure

	part no.	
cable gland PG16/M 20 with nut and sealing fixing area 7...13 mm dia.	44-956	0,009



slow-make switching element

switching system

switching system

The double-break switching system can be supplied for the following switching functions: 1 normally closed, 1 normally open or 1 changeover contact with or without overlap.

The normally closed contacts have forced opening according to DIN 0660, IEC 947-5-1 and DIN VDE 0113.

The switching element exhibits high reliability due to its H-contact system with relative friction. The normally open and normally closed contacts can be used electrically separated.

The standard version is ideal for high breaking capacities. For lower capacities a special version can be supplied.

material

material of contacts

standard version: Ag-Ni alloy

special version: gold/silver

plastics

UL listed, Cd-free

switching element

PC, PA 6.6 self-extinguishing

mechanical characteristics

actuating force

per switching element ≤ 5 N

(illuminated) pushbutton actuator ≤ 10 N

emergency stop switch actuator ≤ 20 N

emergency stop switch actuator foolproof ≤ 70 N

double pushbutton ≤ 12 N per contact surface

actuating travel

approx. 6 mm

resistance to climate

humidity and heat, constant as per DIN IEC 68 Teil 2-3

humidity and heat, cyclic as per DIN IEC 68 Teil 2-30

storage temperature

-40°C to +70°C

mechanical life

slow-make switching element 10×10^6 switching operations

pushbutton momentary action 5×10^6 switching operations

pushbutton maintained action 1×10^6 cycles of operation

Illuminated pushbutton momentary action 3×10^6 switching operations

Illuminated pushbutton maintained action 1×10^6 cycles of operation

interlocking pushbutton 2×10^5 switching operations

emergency button not foolproof 1×10^5 switch rating

emergency button

foolproof 6050 switch rating

keylock switch 2×10^5 cycles of operation

selector switch 2×10^5 cycles of operation

double pushbutton 2×10^5 switching operations per contact surface

resistance to shock

40 g (duration 6 ms) as per IEC 68-2-27

resistance to vibration

sinusoidal, 5 g at 10-500 Hz as per IEC 68-2-6

ambient air temperature

-25°C as per DIN EN 60068-2-1

+60°C as per DIN EN 60068-2-2

degree of protection

actuators at front and enclosure IP 65 for IEC 529/DIN 40050

electrical characteristics

rated insulation voltage

Ui:

slow-make switching element: 660 V

lamp element 250 V

lamp transformer: 660 V

degree of pollution: 3

rated voltage

Ue:

AC-15:

120 V~6A

230 V~6A

400 V~4A

500 V~3A

600 V~1,2A

DC-13:

24 V - 3A

60 V - 1,3A

120 V - 0,6A

250 V - 0,3A

rated impulse withstand voltage

Uimp:

lamp element: 2,5 kV

lamp transformer: 6 kV

slow-make switching element: 6 kV

1 NC + 1 NO without overlap:

Ue > 400 V, same polarity

Uimp = 4000 V

1 NC + 1 NO with overlap:

Ue > 250 V, same polarity

Uimp = 4000 V

rated current

(resistive)Ie:

AC-12: 500 V ~5 A

DC-12:

24 V - 10 A

60 V - 8 A

125 V - 3 A

250 V - 1 A

contact resistance

starting value (initial) ≤ 50 mΩ

electrical life

AC-15: 400 V ~2 A: 1×10^6 switching operations

continuous thermal current Ith2

Ith2 = 10 A

short-circuit protection

max. series fuse to be provided 10 A gL

lamp transformer: short-circuit-proof

rules

approvals

- VDE-Reg.-No. 5310
- UL
- CSA
- German Lloyd
- VDE
- CE (declaration of conformity)

actuator

material

adapter and enclosure


PC

front parts


PA 6, PA 12, PC, chromium-plated ABS

technical drawings


1 indicator complete full face illumination not for marking, indicator complete front illumination for marking
page 289, 289

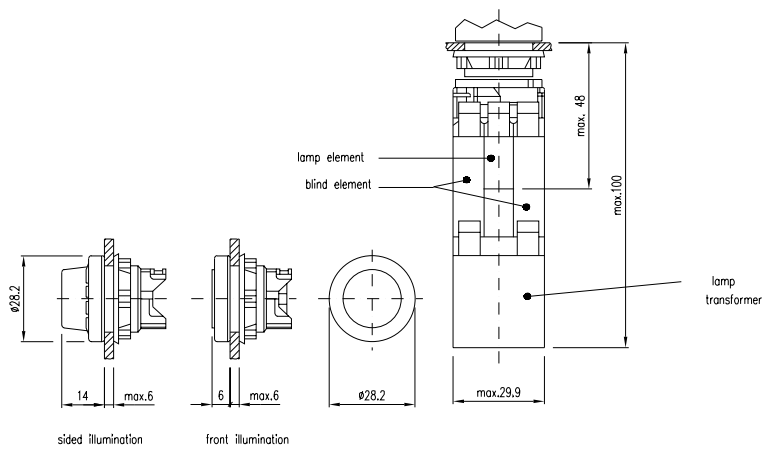

2 pushbutton complete
page 290

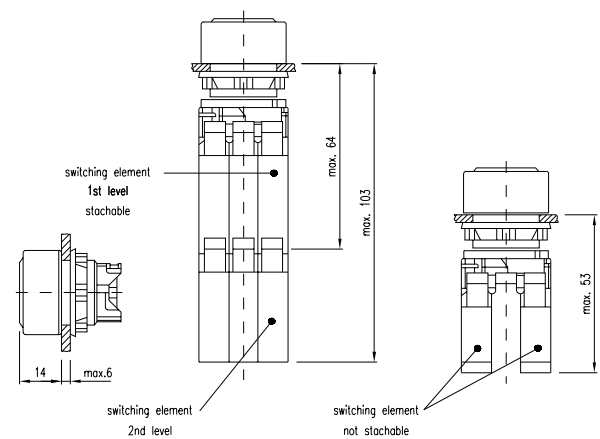


3 illuminated pushbutton complete for marking
page 290

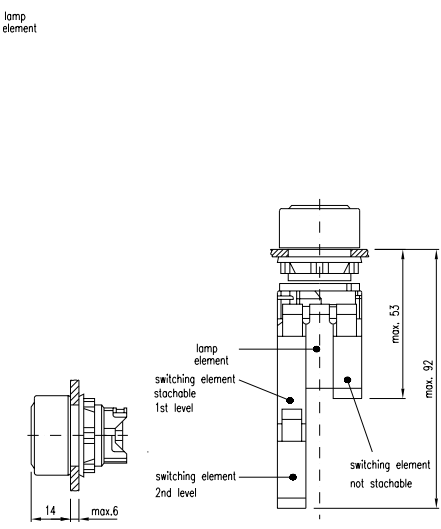


4 emergency stop switch complete

page 291

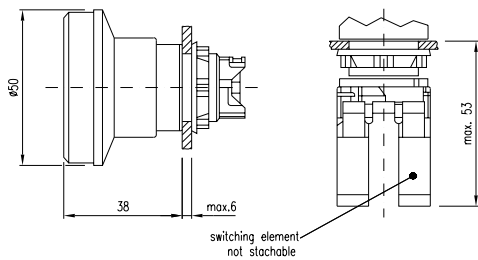


5 emergency stop switch complete

page 291

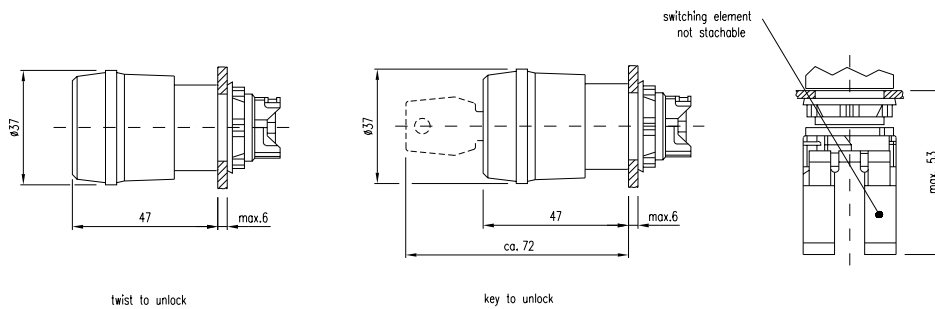


6 key lock complete 2 positions

page 291

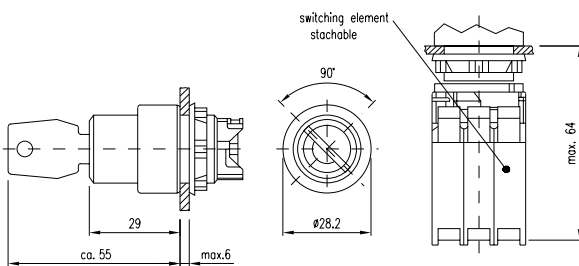

7 key lock complete 3 positions


page 292

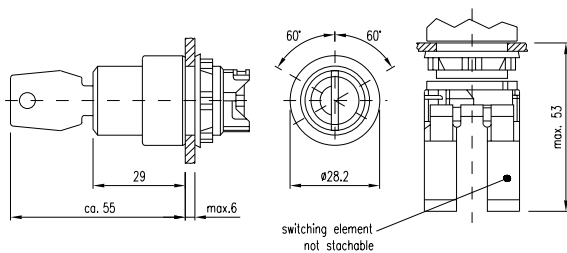

8 selector switch complete 2 positions


page 292

switching element




9 selector switch complete 3 positions

page 293

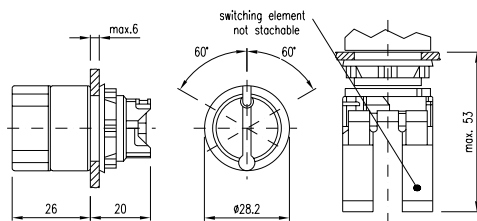


10 indicator actuator, full face illumination not for marking

page 294

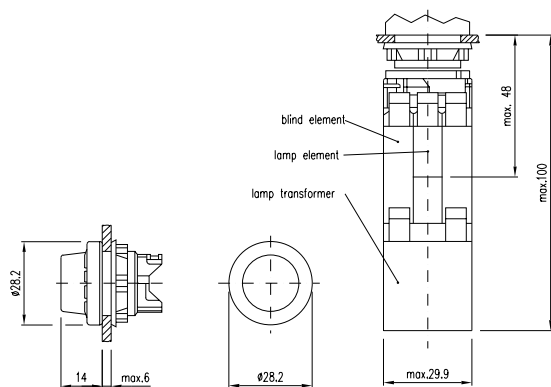


11 indicator actuator, front illumination for flush mounting for marking


page 295

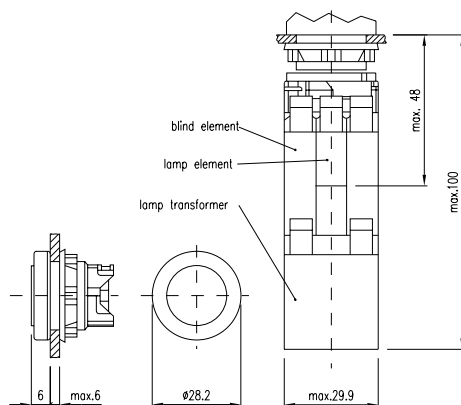


12 pushbutton actuator not for marking page 296

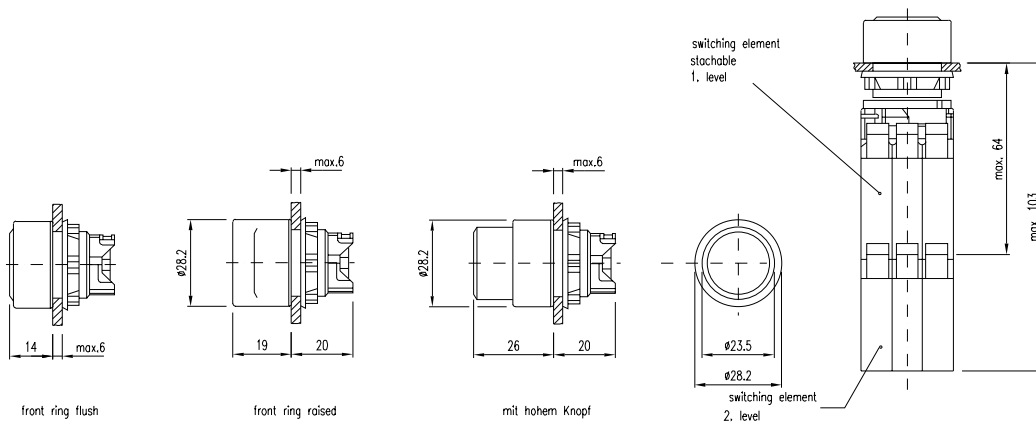

13 pushbutton actuator for marking page 298

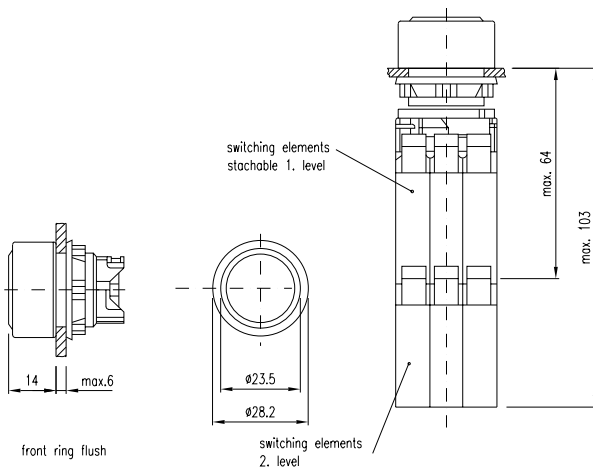


14 illuminated pushbutton actuator for marking page 299

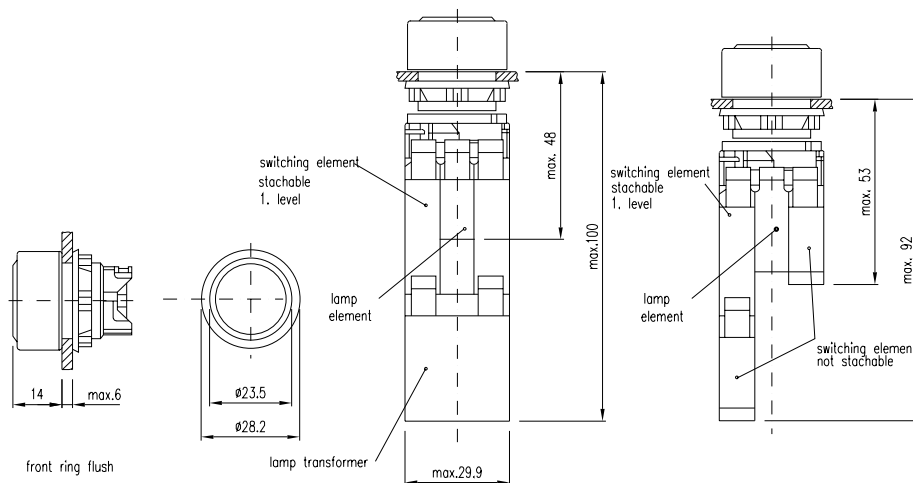


15 double pushbutton actuator

page 300

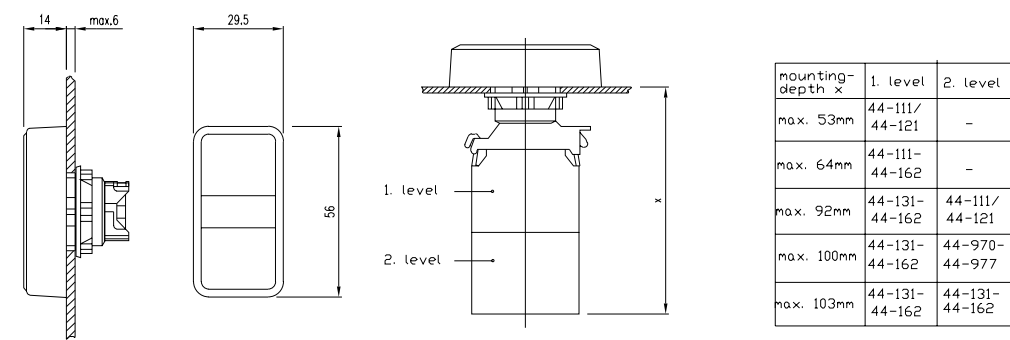


16 emergency stop switch actuator

page 301

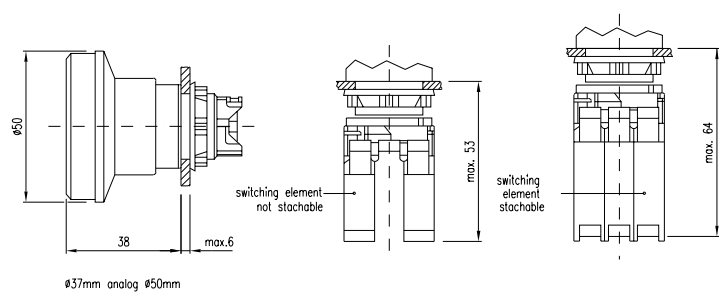


17 emergency stop switch actuator foolproof

page 302

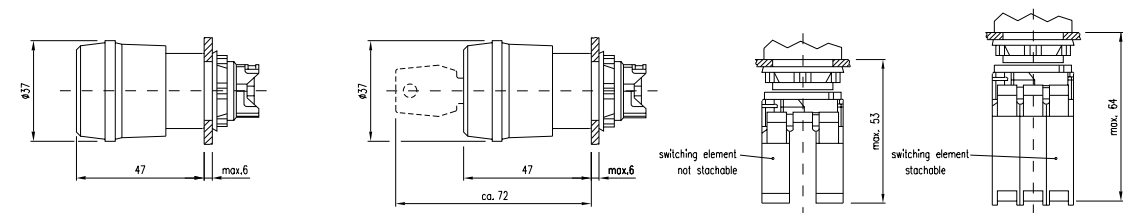


18 pushbutton actuator with mushroom-head cap

page 303

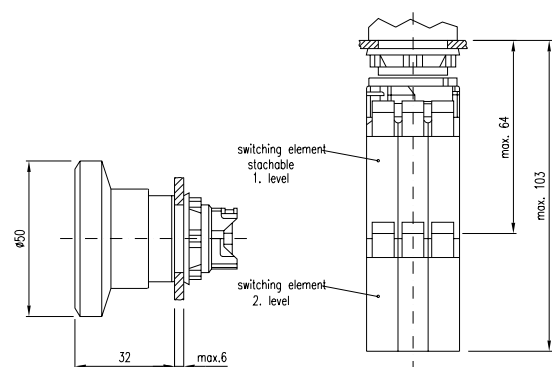


19 keylock switch actuator 2 positions, keylock switch actuator 3 positions

page 304, 305

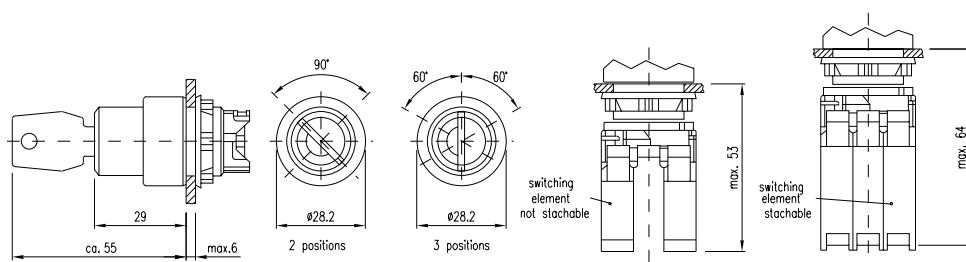


20 selector switch actuator 2 positions , selector switch actuator 3 positions

page 306, 307

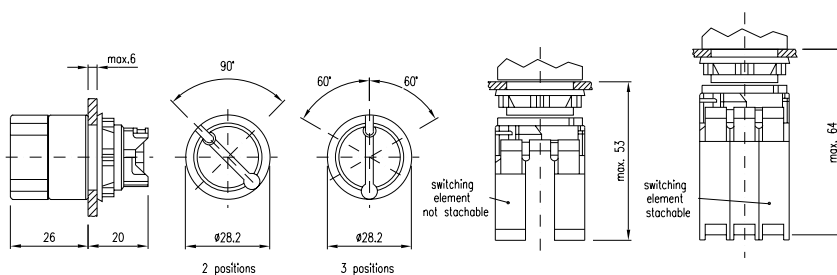


21 interlocking pushbutton actuator

page 308

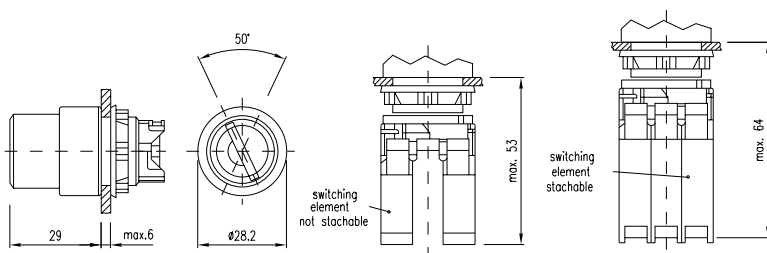


22 potentiometer-drive

page 308

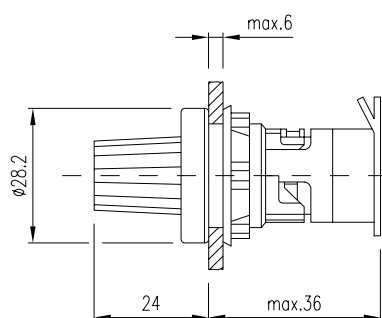


for potentiometer No. 47-745

23 enclosure fitted with pushbuttons, enclosure fitted with emergency stop switch, enclosure, enclosure for emergency stop switch
page 309, 309, 325, 331

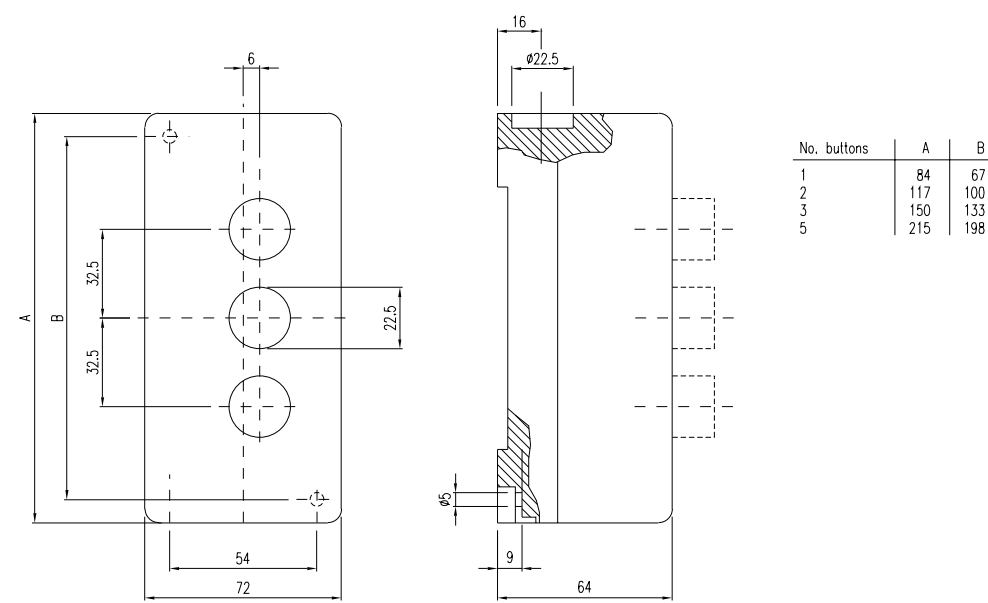


24 indicator actuator full face illumination for flush mounting not for marking, indicator actuator, front illumination for flush mounting for marking
page 310, 311

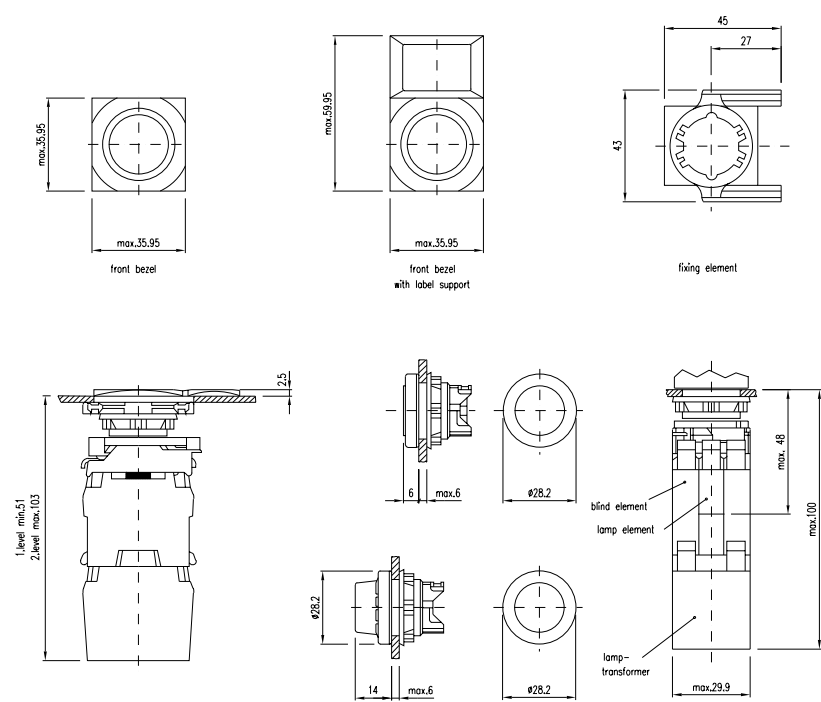


25 pushbutton actuator for flush mounting not for marking

page 312

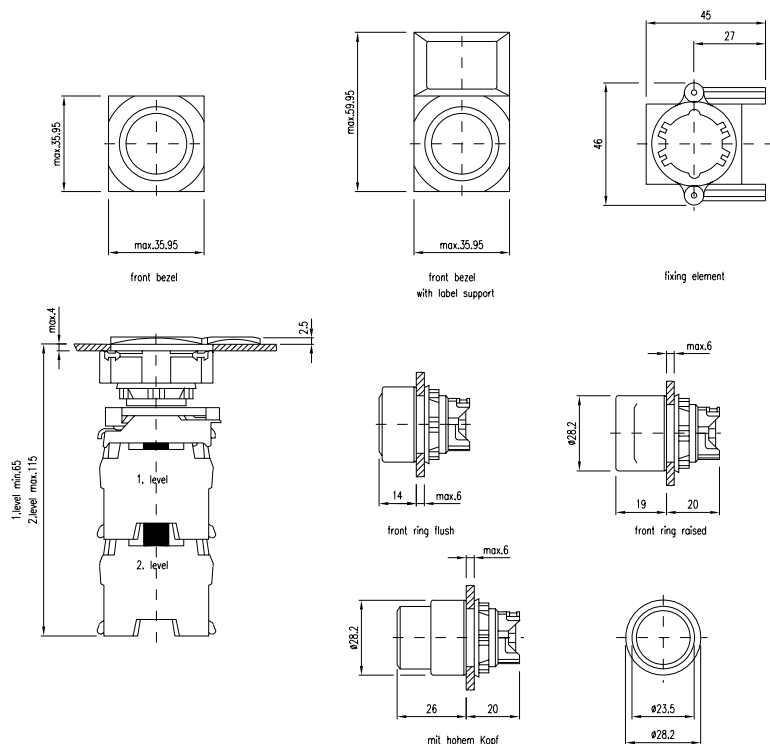


26 pushbutton actuator for flush mounting for marking, illuminated pushbutton actuator for flush mounting for marking


page 314, 315

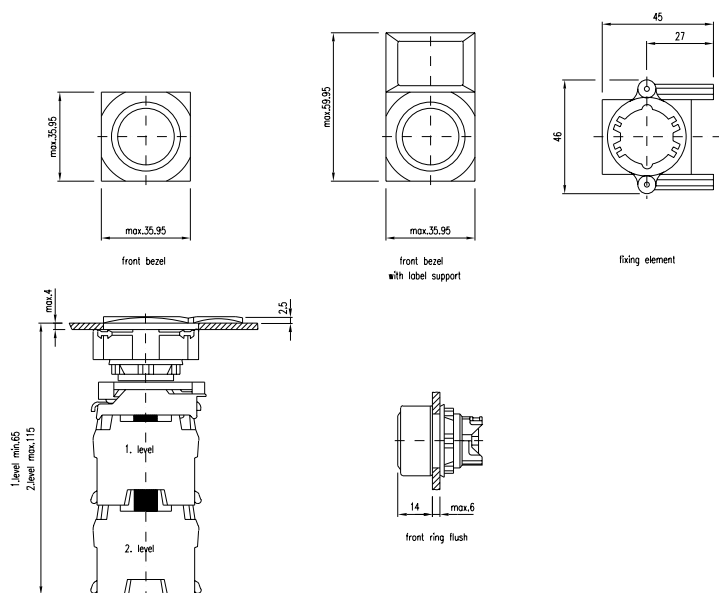

27 keylock switch actuator 2 positions for flush mounting , keylock switch actuator 3 positions for flush mounting page 316, 317

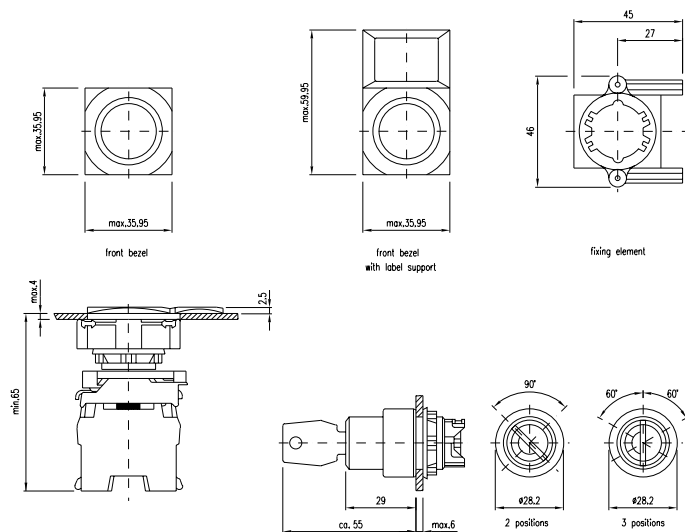


28 selector switch actuator 2 positions for flush mounting , selector switch actuator 3 positions for flush mounting page 318, 319

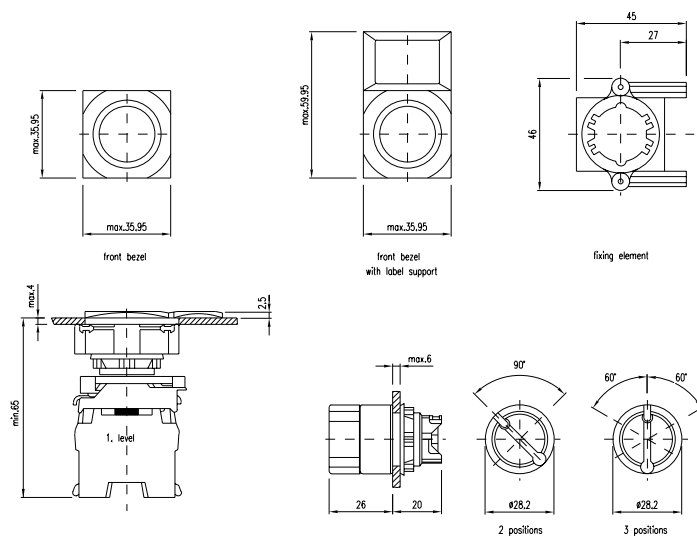


29 interlocking pushbutton actuator for flush mounting

page 320

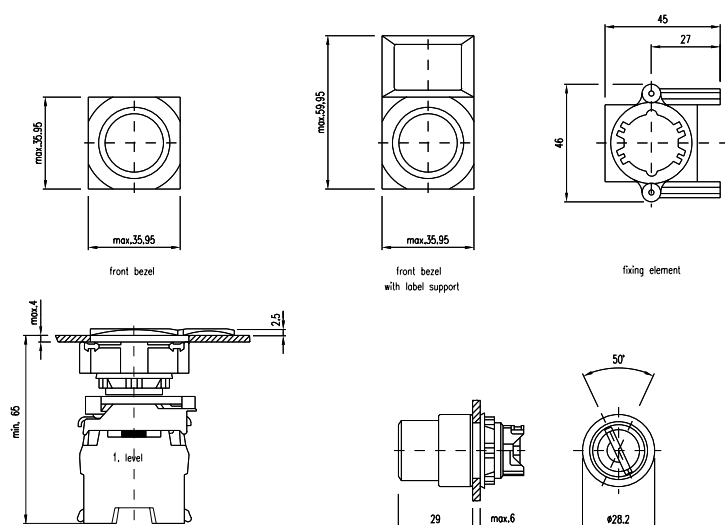


30 potentiometer-drive for flush mounting

page 321

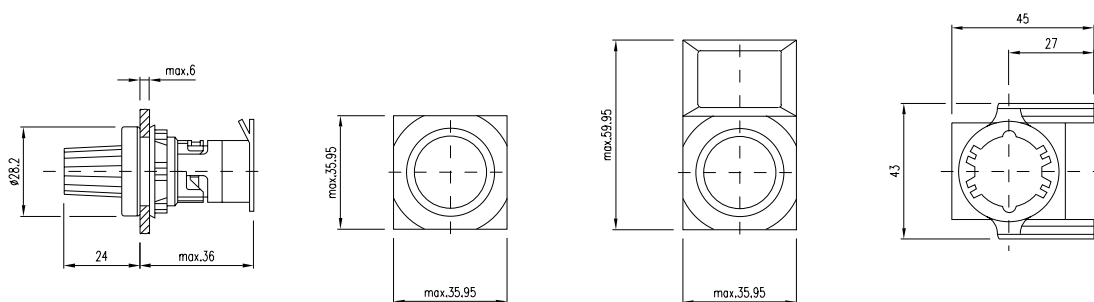


31 front bezel set for flush mounting without label support, front bezel set for flush mounting with label support

page 322, 323

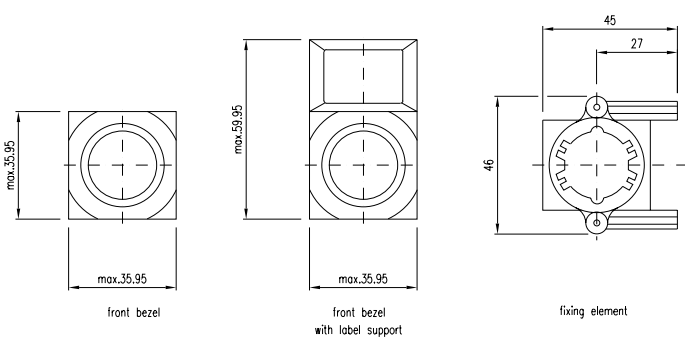


32 legend plate

page 323




33 label support without label, label support with label

page 324, 324




34 protective cover

page 325

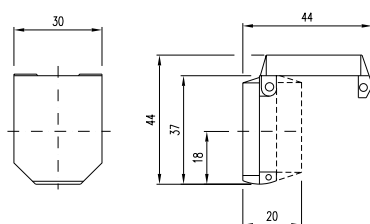


35 blind plug

page 325




36 front adapter


page 327

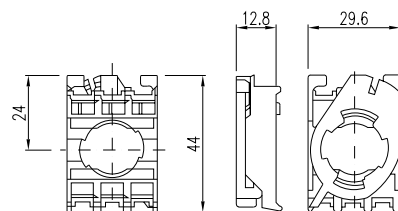


37 slow-make switching element stackable for front mounting, slow-make switching element not stackable for front mounting page 327, 327

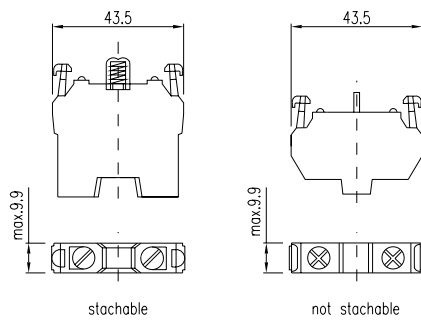


38 lamp element for front mounting page 328




39 slow-make switching element not stackable for base mounting page 328




40 lamp for base mounting page 328




41 blind element page 329



42 resistor diode element, diode element page 329, 330

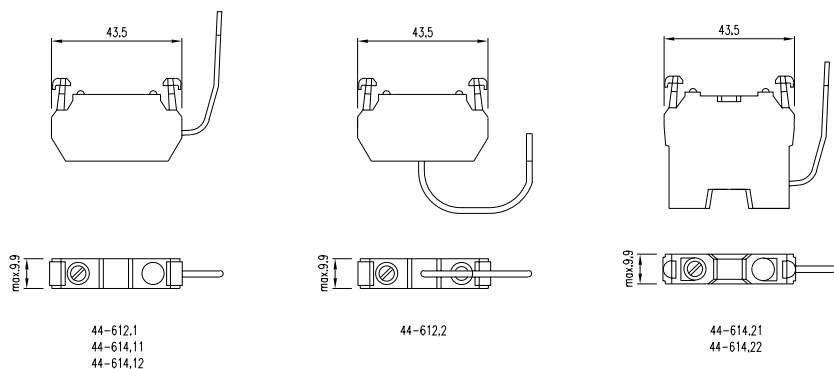


43 lamp transformer page 330

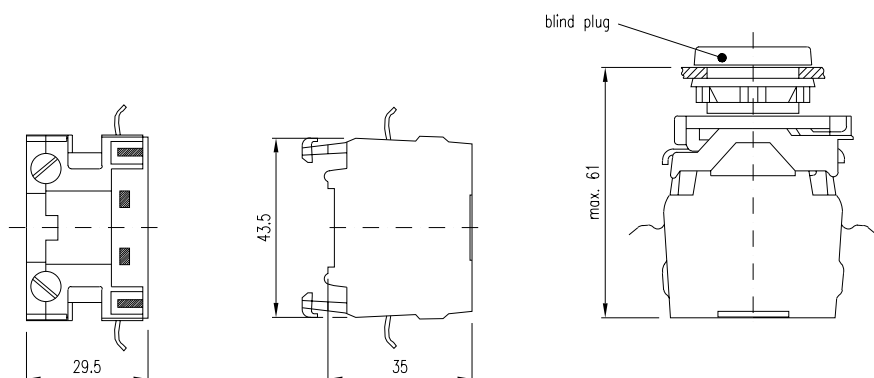

mounting dimensions


1 indicator complete full face illumination not for marking, indicator complete front illumination for marking, pushbutton complete, illuminated pushbutton complete for marking, key lock complete 2 positions, key lock complete 3 positions, selector switch complete 2 positions, selector switch complete 3 positions, indicator actuator, full face illumination not for marking, indicator actuator, front illumination for marking, pushbutton actuator not for marking, pushbutton actuator for marking, illuminated pushbutton actuator for marking, keylock switch actuator 2 positions, keylock switch actuator 3 positions, selector switch actuator 2 positions, selector switch actuator 3 positions, interlocking pushbutton actuator, potentiometer-drive

page 289, 289, 290, 290, 291, 292, 292, 293, 294, 295, 296, 298, 299, 304, 305, 306, 307, 308, 308

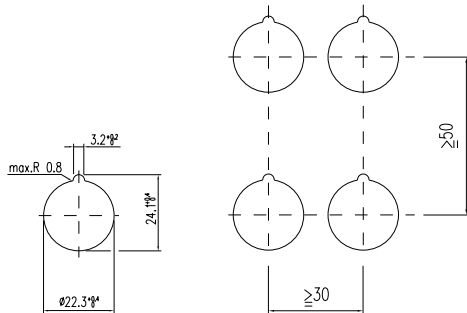


2 emergency stop switch complete, emergency stop switch actuator, emergency stop switch actuator foolproof, pushbutton actuator with mushroom-head cap

page 291, 301, 302, 303

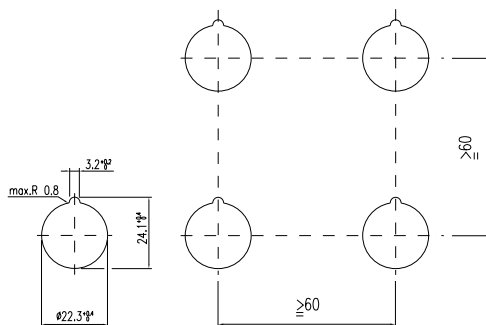


3 double pushbutton actuator

page 300

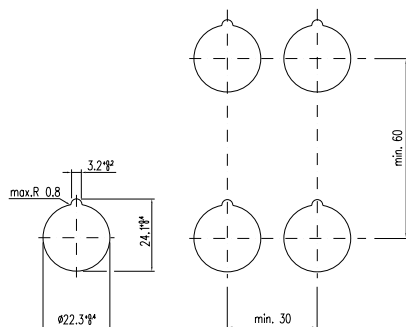


4 indicator actuator full face illumination for flush mounting not for marking, indicator actuator, front illumination for flush mounting for marking, pushbutton actuator for flush mounting not for marking, pushbutton actuator for flush mounting for marking, illuminated pushbutton actuator for flush mounting for marking, keylock switch actuator 2 positions for flush mounting, keylock switch actuator 3 positions for flush mounting, selector switch actuator 2 positions for flush mounting, selector switch actuator 3 positions for flush mounting, interlocking pushbutton actuator for flush mounting, potentiometer-drive for flush mounting
page 310, 311, 312, 314, 315, 316, 317, 318, 319, 320, 321

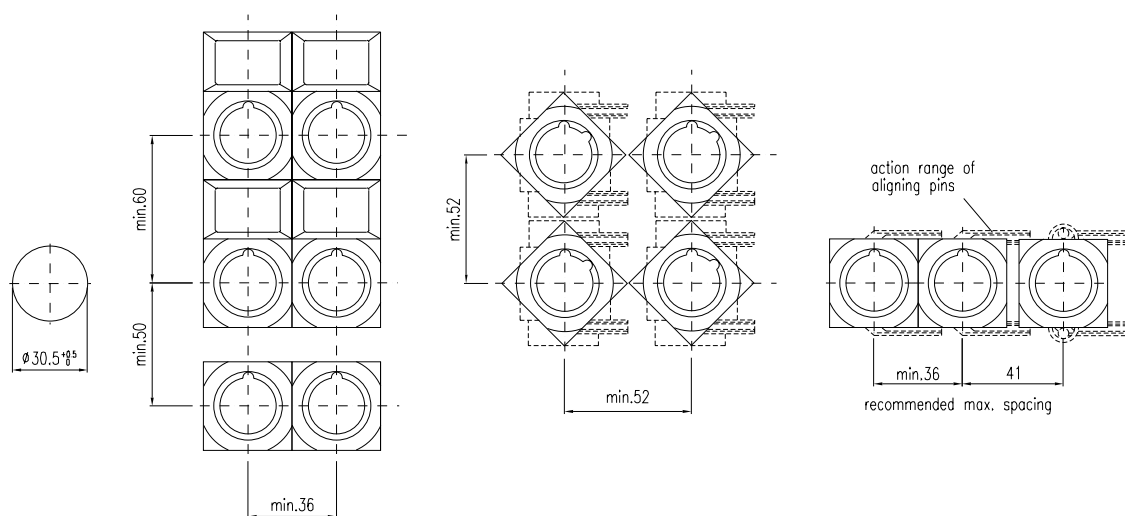


circuit drawings


1 indicator complete full face illumination not for marking, indicator complete front illumination for marking, lamp element for front mounting, lamp for base mounting
page 289, 289, 328, 328




2 pushbutton complete
page 290



3 pushbutton complete
page 290




4 pushbutton complete
page 290




5 pushbutton complete

page 290




6 pushbutton complete

page 290




7 illuminated pushbutton complete for marking

page 290




8 illuminated pushbutton complete for marking

page 290




9 illuminated pushbutton complete for marking

page 290




10 illuminated pushbutton complete for marking

page 290




11 illuminated pushbutton complete for marking

page 290




12 emergency stop switch complete

page 291




13 key lock complete 2 positions

page 291

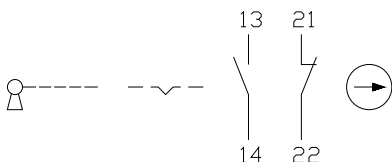


14 key lock complete 3 positions

page 292

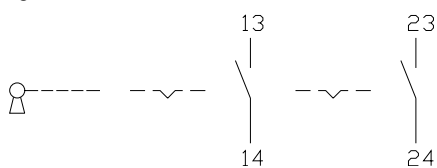


15 selector switch complete 2 positions

page 292

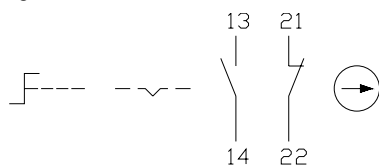

16 selector switch complete 3 positions

page 293

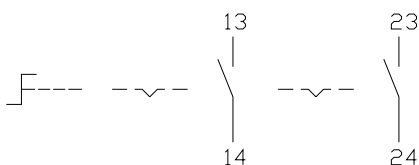

17 pushbutton actuator not for marking, pushbutton actuator for marking, pushbutton actuator with mushroom-head cap, pushbutton actuator for flush mounting not for marking, pushbutton actuator for flush mounting for marking

page 296, 298, 303, 312, 314




18 pushbutton actuator not for marking, pushbutton actuator for marking, pushbutton actuator for flush mounting not for marking, pushbutton actuator for flush mounting for marking

page 296, 298, 312, 314




19 illuminated pushbutton actuator for marking, illuminated pushbutton actuator for flush mounting for marking

page 299, 315




20 illuminated pushbutton actuator for marking, illuminated pushbutton actuator for flush mounting for marking

page 299, 315,




21 emergency stop switch actuator, emergency stop switch actuator foolproof

page 301, 302




22 keylock switch actuator 2 positions, keylock switch actuator 2 positions for flush mounting

page 304, 316




23 keylock switch actuator 2 positions, keylock switch actuator 2 positions for flush mounting

page 304, 316




24 keylock switch actuator 3 positions, keylock switch actuator 3 positions for flush mounting

page 305, 317




25 keylock switch actuator 3 positions, keylock switch actuator 3 positions for flush mounting

page 305, 317



26 keylock switch actuator 3 positions, keylock switch actuator 3 positions for flush mounting
page 305, 317,



27 keylock switch actuator 3 positions, keylock switch actuator 3 positions for flush mounting
page 305, 317




28 selector switch actuator 2 positions, selector switch actuator 2 positions for flush mounting
page 306, 318




29 selector switch actuator 2 positions, selector switch actuator 2 positions for flush mounting
page 306, 318,



30 selector switch actuator 3 positions, selector switch actuator 3 positions for flush mounting
page 307, 319




31 selector switch actuator 3 positions, selector switch actuator 3 positions for flush mounting
page 307, 319




32 selector switch actuator 3 positions, selector switch actuator 3 positions for flush mounting
page 307, 319




33 selector switch actuator 3 positions , selector switch actuator 3 positions for flush mounting
page 307, 319




34 interlocking pushbutton actuator, interlocking pushbutton actuator for flush mounting
page 308, 320




35 potentiometer-drive, potentiometer-drive for flush mounting
page 308, 321




36 slow-make switching element stackable for front mounting, slow-make switching element not stackable for front mounting, slow-make switching element not stackable for base mounting
page 327, 327, 328




37 slow-make switching element stackable for front mounting
page 327



38 slow-make switching element stackable for front mounting, slow-make switching element not stackable for front mounting, slow-make switching element not stackable for base mounting
page 327, 327, 328




39 slow-make switching element stackable for front mounting
page 327




Switching examples for the central lamp test


Application of the diode element with 1 diode

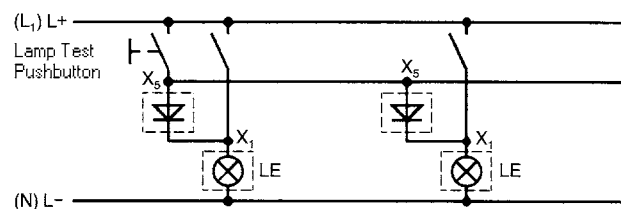

Application of the diode element with 2 diodes

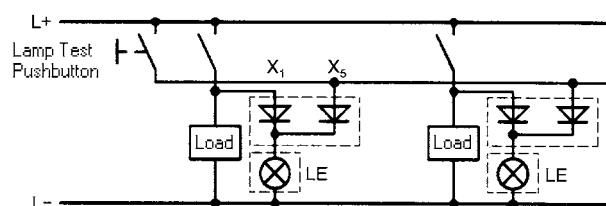

Application of the diode resistance element with lamp test

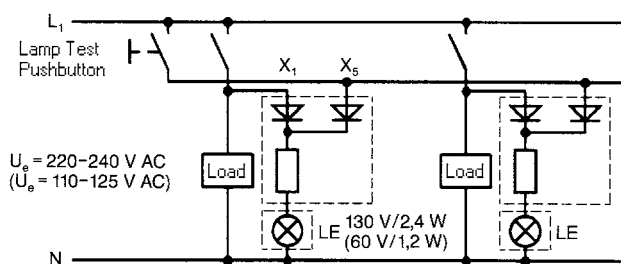

Note:

- Only apply incandescent lamps with special data!
Incandescent lamp 130V/2,4 W with spiral form 2 x CC-2F; Typ-Nr. 44-952.130
Incandescent lamp 60 V/1,2 W with spiral form CC-2F; Typ-Nr. 44-952.60
- maximum environmental temperature 40°C for Part-Nr. 44-614.11 und 44-614.21
- For base mounting the connection wire which juts out in the middle must be placed so that it does not interfere with the actuator system.

Standard texts for text plates

Text-Nr.

I	II	III	O	EIN	AUS
1	2	3	4	5	6
AUF	AB	START	STOP	HAND	AUTO
7	8	9	10	11	12
ZU	ON	OFF	ARRÊT	MARCHE	RESET
13	14	15	16	17	18


Symbols as per ISO R 369 for text plates

Symbol No.

	1	Direction of linear rectilinear motion (also for $\rightarrow \downarrow$)		13	Direction of spindle rotation		29	Decrease of value (speed, for instance)		49	Cooling pump
	2	Linear motion in 2 directions (also for $\downarrow$)		14	One revolution		30	Speed of planing cut		50	Lubricant pump
	3	Interrupted linear motion (also for $\leftarrow \downarrow$)		15	Number of revolutions per minute (spindle speed)		31	Speed of turning cut		51	Hydraulic system pump
	4	Limited linear motion (also for $\leftarrow \downarrow$)		16	Feed		32	Speed of drilling cut		52	Hydraulic motor
	5	Limited linear motion and return		17	Feed per revolution		33	Speed of milling cut (similar symbol for speed of grinding)		53	Tracer
	6	Oscillating linear motion (continuous)		18	Feed per minute		34	Conventional milling		61	Stepless regulation
	7	Direction of continuous rotation (right)		19	Reduced feed		35	Climb milling (down milling)		62	Adjustable
	7a	Direction of continuous rotation (left)		20	Rapid feed		41	Electric motor		63.1	Look or tighten
	8	Rotation in 2 directions		21	Normal feed		42	Rectangular work table or slide element		63.2	Look or tighten
	9	Direction of interrupted rotation (right)		22	Direction of feed (orientation not specified)		43	Round work table or rotating element		64.1	Unlock, unclamp
	9a	Direction of interrupted rotation (left)		24	Transverse feed		44	Turning spindle		64.2	Chuck open
	10	Limited rotation (right)		25	Vertical feed		45	Drilling spindle		65	Brake on
	10a	Limited rotation (left)		26	Rapid traverse		46	Milling spindle		66	Brake off
	11	Limited rotation and return		27	Threading		47	Grinding spindle		67	Automatic (or semi-automatic) cycle
	12	Oscillating rotary movement (continuous)		28	Increase of value (speed, for instance)		48	Pump (general symbol)		68	Hand control




Symbols as per ISO R 369 for textplates

Symbol No.

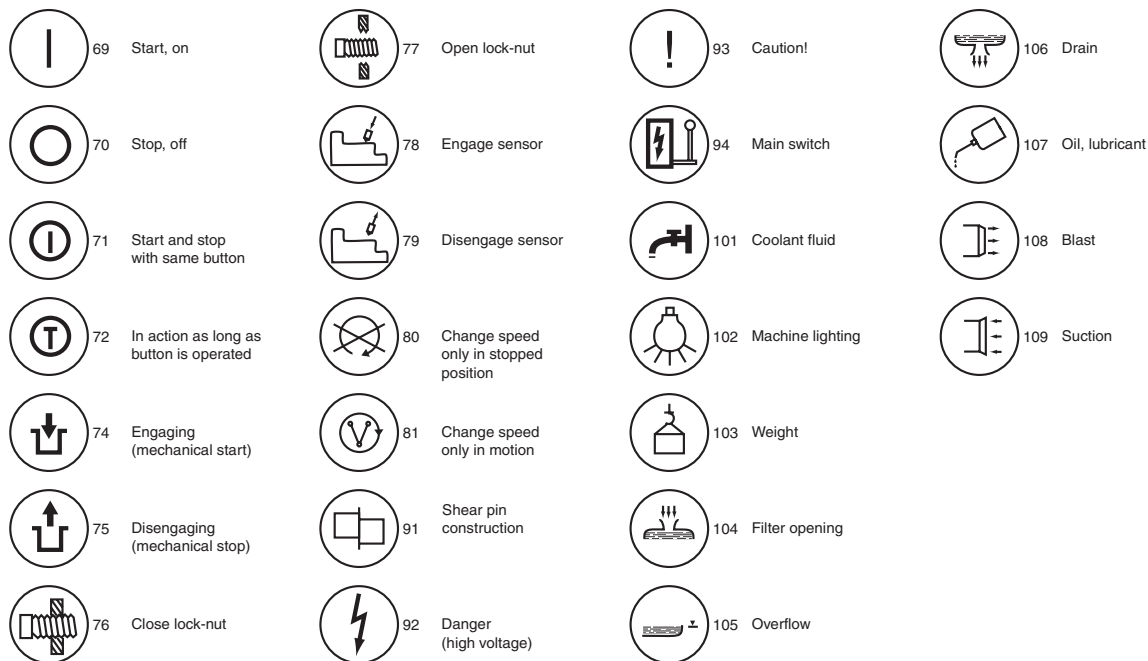

Marking for labels

label black anodized

Text-No.		Text-No.		Text-No.	
	T 01	Forwards	T 14	Set up	T 22
	T 02	Reverse	T 15	Raise	T 23
	T 03	Right	T 16	Lower	T 24
	T 04	Left	T 17	Hand	T 25
OFF	T 10	Halt	T 18	STOP	T 26
ON	T 11	Close	T 19	START	T 27
Up	T 12	Fast	T 20	HAND/AUTO	T 28
Down	T 13	Slow	T 21	OFF/ON	T 29

