

Data Sheet

RP025xxHBWC

Page 1/5


P/N

311071xx

xx=number of poles

2017/05/04

Illustration

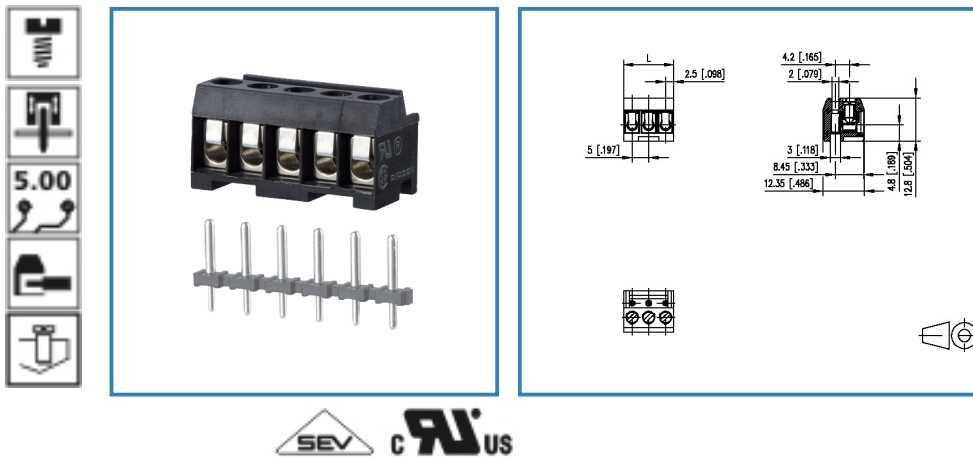

see enlarged drawing at the end of the document

Product specification

- screw type terminal block, pluggable
- centerline 5.00 mm, direction of connection 90°
- wire protector, fittable without loss of poles
- color black
- Wire entry perpendicular to plug direction

© 2017 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!



Data Sheet

RP025xxHBWC

Technical Data

General Data

Tightening torque SEV	0.5 Nm		
Tightening torque UL	6 lb-in		
min. number of poles	2		
max. number of poles	24		
Insulating material class	CTI 600		
clearance/creepage dist.	2.3 mm		
protection category	IP 00		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	100.0 V	320.0 V	320.0 V
Rated test voltage	2.5 kV	2.5 kV	2.5 kV

Connection data

Rated wiring solid wire	0.08 - 2.5 mm ² / AWG 28 - 12
Rated wiring stranded wire	0.08 - 2.5 mm ² / AWG 28 - 12

Approvals

 V / A / AWG	300 / 10 / 28 - 12
--	--------------------

	10 A / 250 V / 2.5 kV / 3 / IEC 61984 / 0.33 - 2.5 mm ²
--	---

Material

insulating material	PA66
flammability class	V0
contact material	CuSn
Glow-Wire Flammability GWFI	960
Glow-Wire Flammability GWIT	775
contact surface	Sn
terminal body material	CuZn
terminal body surface	Ni
screw surface	Zn Cr(VI)-frei/free
wire protector material	CuSn



Data Sheet

RP025xxHBWC

Page 3/5

P/N

311071xx

xx=number of poles

2017/05/04

wire protector surface	Sn
screw thread	M3

Climatic properties

upper limit temperature	105 °C
lower limit temperature	-40 °C

General

Tolerance	ISO 2768 -mH
-----------	--------------



Data Sheet

RP025xxHBWC

Page 4/5

P/N

311071xx

xx=number of poles

2017/05/04

Matching Part

P/N	Product name
310171	PR015xxVBHC Typ 017
310271	PR015xxVBVC Typ 027
310391	PT055xxHBHC Typ 039
310411	PT065xxVBEN Typ 041
310421	PT065xxVBVN Type 042
314171	PM035xxVBHC Typ 417

Accessories

P/N	Product name
710084	710084
710085	710085
710121-2	710121
710122-2	710122
716846	716846



Data Sheet

RP025xxHBWC

Page 5/5

P/N


311071xx

xx=number of poles

2017/05/04

Illustration

Drawing

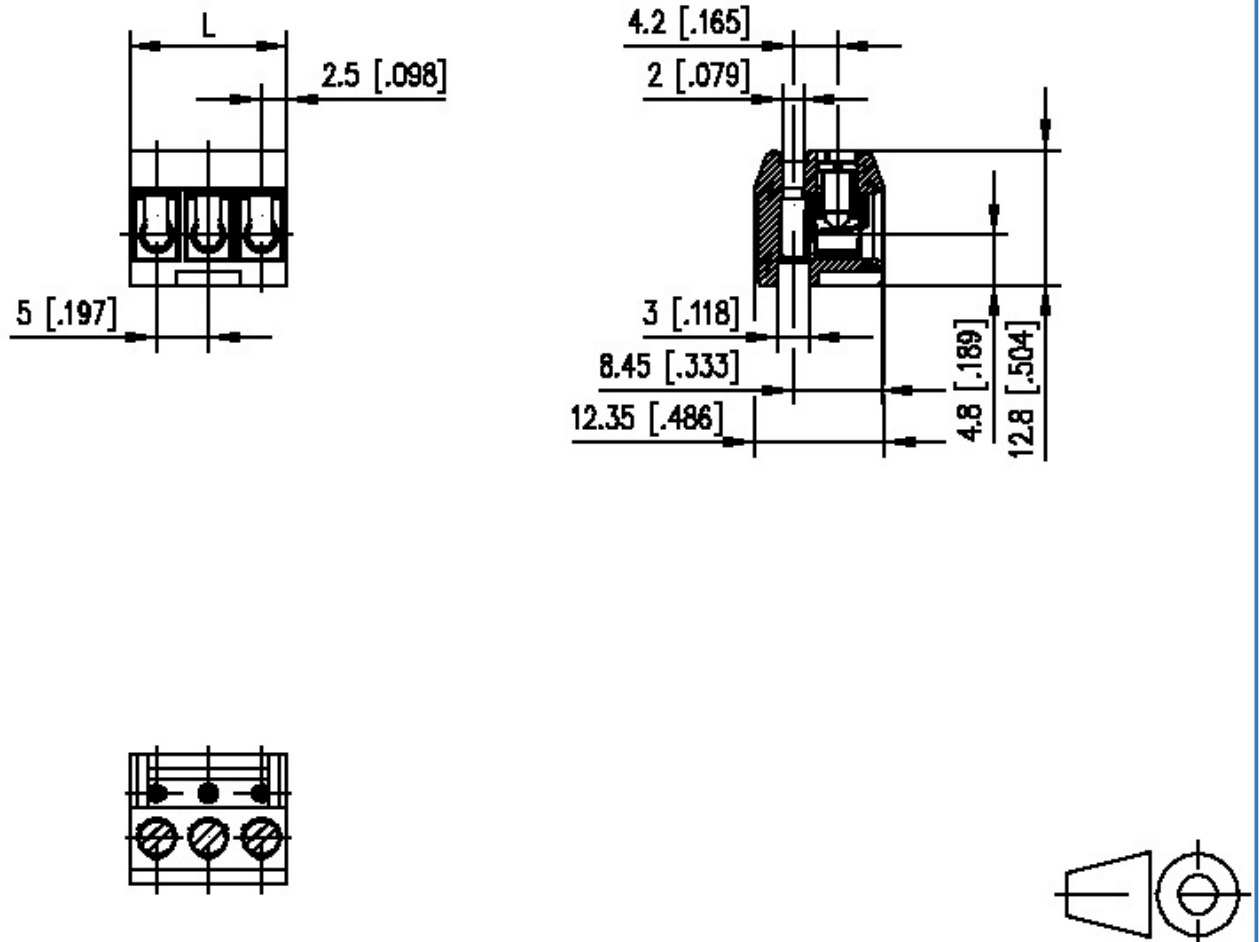

$$L = (\text{pole size} - 1) \times \text{centerline} + 5 [.197]$$

