

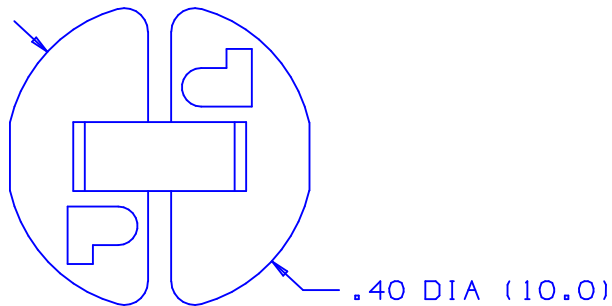




NOTES:

1. DIMENSIONAL TOLERANCES:
 .XX $\pm .02 (.5)$
 .XXX $\pm .010 (.25)$
2. USE WITH STANDARD CROSS
 SECTION MLTs.
3. DIMs IN () ARE mm.
4. TO BE INSTALLED IN .25 (6.3)
 DIAMETER HOLE. USED ON PLATE
 THICKNESS OF .03 - .12 (.8 - 4.0)
5. PACKAGE QTY: Q = 25

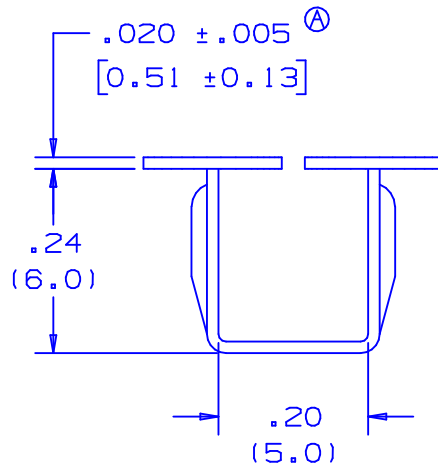

S41075_02

								PANDUIT CORP. TINLEY PARK, ILLINOIS						
								METAL PUSH BUTTON MOUNT MBM-H25						
								UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± (.XX) ± ANGLES ±		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.				
02	1/04	BRH		Ⓐ CHANGED DIM TO .020±.005, WAS .02	11472			DRAWN BY BJO DATE 11/11/92 CHK'D JAC		MAT'L: 304 STAINLESS STEEL		SCALE 4X		
01	1/01	KMD	JAC	ADDED NOTE 5 CAD FILE SPEC WAS N41075SA_PCD_00	09010	JAC	CCH					DRAWING NO. S41075		DWG A
00	11/92	BO	JAC	RELEASED	01265	LA	GP					SIZE		
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM							