


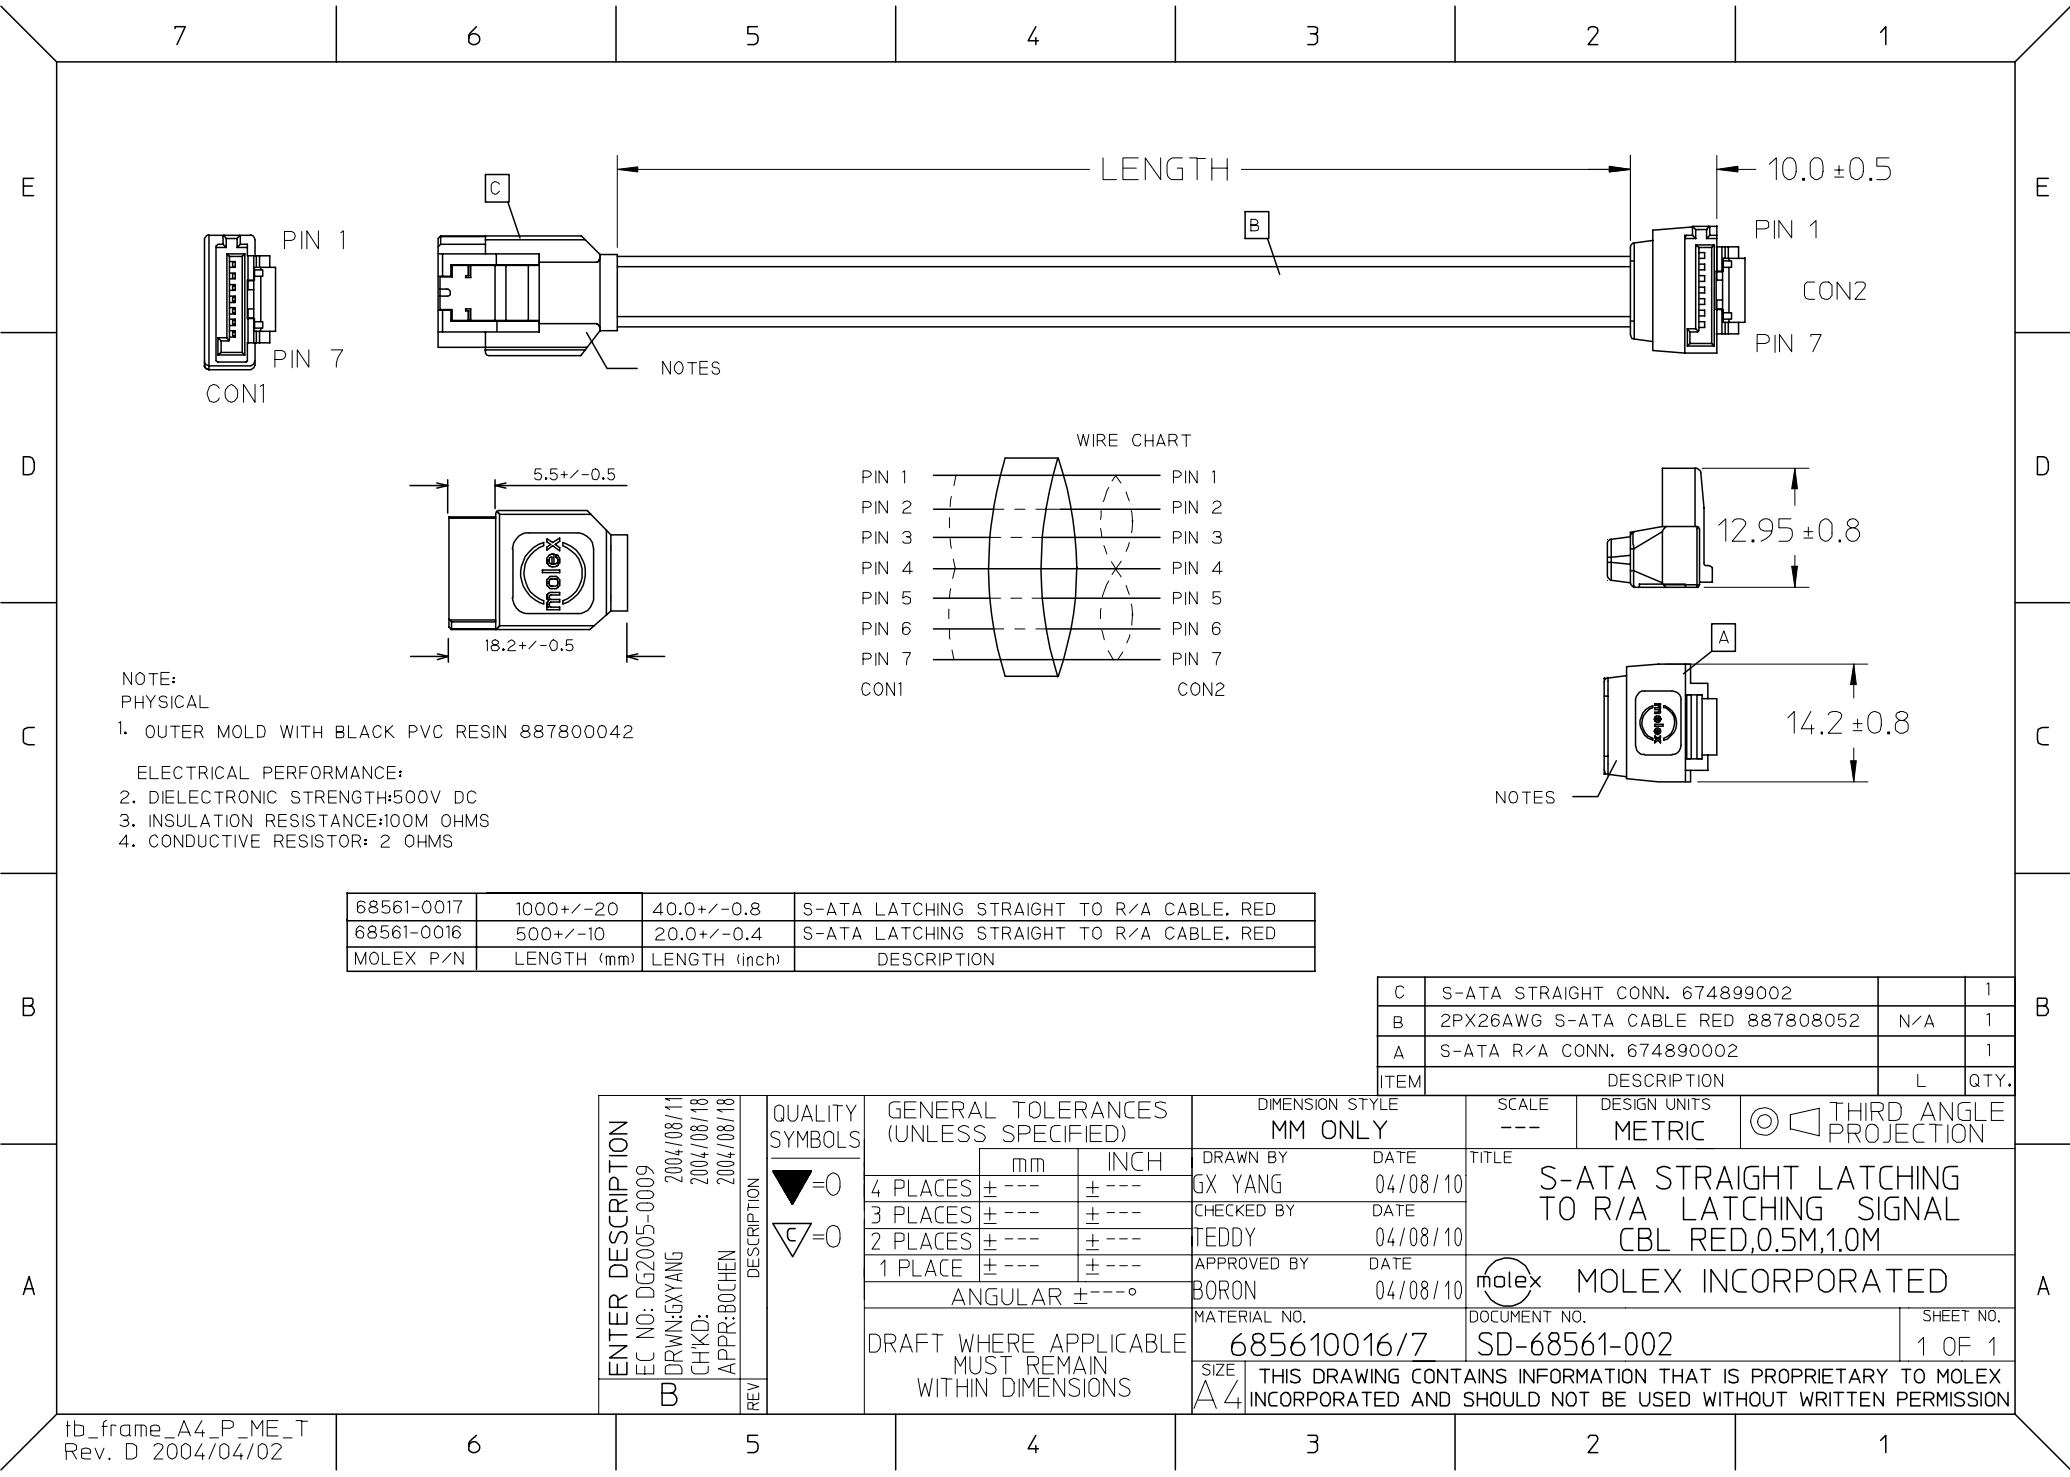

NOTE:
PHYSICAL

1. OUTER MOLD WITH BLACK PVC RESIN 887800042

ELECTRICAL PERFORMANCE:

- 2. DIELECTRONIC STRENGTH: 500V DC
- 3. INSULATION RESISTANCE: 100M OHMS
- 4. CONDUCTIVE RESISTOR: 2 OHMS

68561-0017	1000+/-20	40.0+/-0.8	S-ATA LATCHING STRAIGHT TO R/A CABLE, RED
68561-0016	500+/-10	20.0+/-0.4	S-ATA LATCHING STRAIGHT TO R/A CABLE, RED
MOLEX P/N	LENGTH (mm)	LENGTH (inch)	DESCRIPTION

C	S-ATA STRAIGHT CONN. 674899002		1
B	2PX26AWG S-ATA CABLE RED 887808052	N/A	1
A	S-ATA R/A CONN. 674890002		1
ITEM	DESCRIPTION	L	QTY.

ENTER DESCRIPTION EC NO: DG2005-0009 2004/08/11 DRWN:GXYANG CHKD: APPR:BOCHEN 2004/08/18 2004/08/18 REV		DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION ◎ □				
					mm	INCH	DRAWN BY GX YANG	DATE 04/08/10	TITLE S-ATA STRAIGHT LATCHING TO R/A LATCHING SIGNAL CBL RED,0.5M,1.0M					
				4 PLACES	± ---	± ---	CHECKED BY TEDDY	DATE 04/08/10						
				3 PLACES	± ---	± ---	APPROVED BY BORON		DATE 04/08/10		molex MOLEX INCORPORATED			
				2 PLACES	± ---	± ---								
				1 PLACE	± ---	± ---	ANGULAR ± ---°		MATERIAL NO. 685610016/7		DOCUMENT NO. SD-68561-002		SHEET NO. 1 OF 1	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										