





13	12	11	10	9	8	7	6	5	4	3	2	44476
ITEM NO.	FORM	WIRE GAGE	QUANTITY PER REEL	DIM. "B"	DIM. "C"	DIM. "D"	DIM. "E"	DIM. "F"	DIM. "G"			
44476-1211	CHAIN	18-20 GA.	4,000	.142±.012	.177±.016	.035	.075±.012	.091±.016	.020			
44476-1212	LOOSE			(3.60±0.30)	(4.50±0.40)	(0.90)	(1.90±0.30)	(2.30±0.40)	(0.50)			
44476-3211	CHAIN	16 GA.	4,000	.142±.012	.177±.016	.035	.091±.012	.106±.016	.024			
44476-3212	LOOSE			(3.60±0.30)	(4.50±0.40)	(0.90)	(2.30±0.30)	(2.70±0.40)	(0.60)			

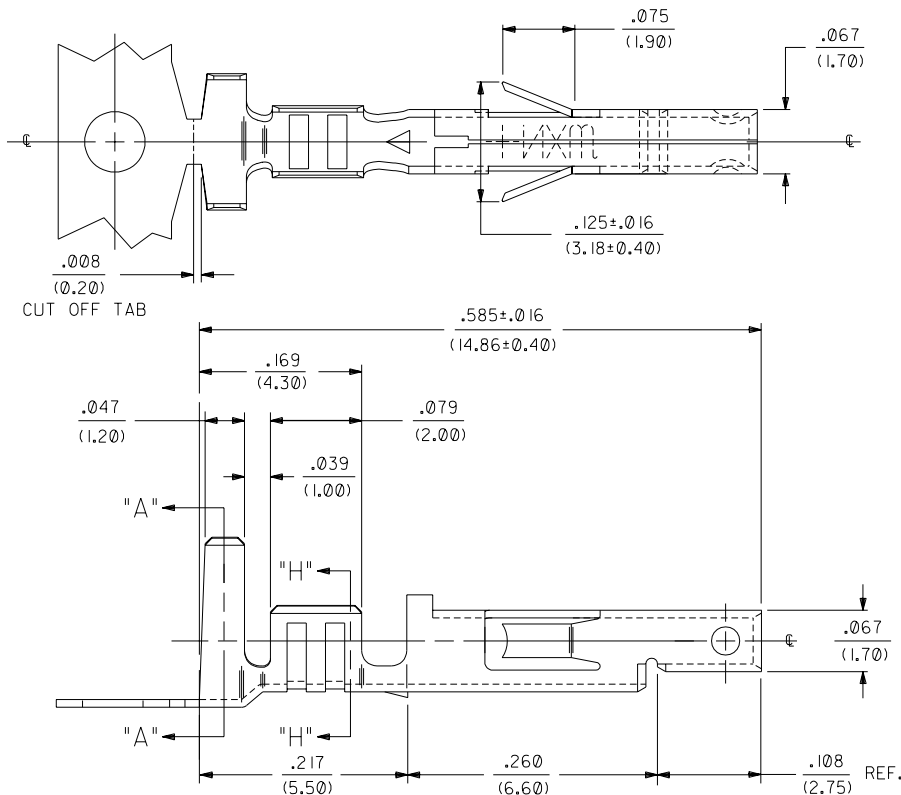

SECT. "H-H"



SECT. "A-A"



LEGEND:

44476 - * * | *

BASE NO. _____

WIRE GAGE _____

1 = 18-20 AWG

3 = 16 AWG

PLATING _____

SEE NOTE 2

CHAIN OR LOOSE _____

"I" = CHAIN

"2" = LOOSE

NOTES:

- MATERIAL: OLIN ALLOY C197, .0008/(.203) THICK.
- FINISH:
 - *2= .000030/(.00076) MIN. SELECT GOLD, .000100/(.00254) MIN. MATTE TIN OVER .000050/(.00127) MIN. NICKEL OVERALL.
 - *THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC." CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD PLATING.
- PRODUCT SPECIFICATIONS AND PROCESSING PARAMETERS: SEE PS-44476-001.
- MATES WITH 44478 MALE TERMINAL AND 43810, 44068, 44472, 44473, 44474, 42404, 5569 AND 30070 SERIES CONNECTORS.
- TERMINAL FOR USE WITH 5557, 30067 & 42474 SERIES HOUSINGS.
- PART DESIGNED IN METRIC.
- ITEM NUMBERS PRECEDED BY AN "X" IN THE CHART ARE NOT AVAILABLE.

REMOVED TIN-LEAD; EC NO. UCP2004-1821 DRAWN: CAMPBELL 04/03/19 CHK: GPOLGAR 04/03/19 APPR: MARGULIS 04/03/19	DESCRIPTION	QUALITY SYMBOLS MAJOR CRITICAL	GENERAL TOLERANCES: (UNLESS SPECIFIED)		SCALE 10:1	DESIGN UNITS ☒ mm ☐ INCH	 THIRD ANGLE PROJECTION	DIMENSIONS: ☐ mm ☒ INCH ☐ mm ONLY			SHT	REV
								TITLE: TERM., FEMALE, CRIMP, MINI-FIT H.C.S. SERIES, BLANK-PLATE-FORM			REVISE ON CAD ONLY	
C	REV		ANGULAR: ±1/2 °		CAD FILENAME		MATERIAL NO. 444760002		DRAWING NO. SD -44476-002		SHEET NO. 1 OF 1	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS								SIZE C	