



# Fault-Protected Analog Multiplexers

## General Description

The MAX354/MAX355 fault-protected multiplexers (muxes) use a series N-channel, P-channel, N-channel structure that protects the devices from overvoltage up to 40V beyond the supply rails during power-up, power-down, and fault conditions. The MAX354/MAX355 also protect sensitive circuit components against voltages near or beyond the normal supplies.

The MAX354 single 8-channel mux and the MAX355 dual 4-channel mux protect analog signals while operating from a single 4.5V to 36V supply or  $\pm 4.5V$  to  $\pm 18V$  dual supplies. These muxes have 350 $\Omega$  on-resistance and can be used for demultiplexing as well as multiplexing. Input leakage current is less than 0.5nA at +25°C and less than 5nA at +85°C.

All digital inputs have 0.8V and 2.4V logic thresholds, ensuring both TTL and CMOS logic compatibility without pull-up resistors. Break-before-make operation is guaranteed and power consumption is less than 1.5mW.

## Applications

Data-Acquisition Systems  
Industrial and Process Control  
Avionics  
ATE Equipment  
Signal Routing  
Redundant/Backup Systems

## Features

- ♦ 350 $\Omega$  Max On-Resistance
- ♦ Improved 2nd Source for MAX358/MAX359 and DG458/DG459
- ♦ Pin Compatible with ADG508F/ADG509F
- ♦ All Switches Off with Supplies Off
- ♦ On Switch Turns Off with Overvoltage
- ♦ Output Clamps at 1.5V Below Supply Rails
- ♦ 0.5nA Max Input Leakage at +25°C (5nA at +85°C)
- ♦ No Power-Up Sequencing Required
- ♦ TTL and CMOS-Logic Compatibility


## Ordering Information

| PART      | TEMP. RANGE     | PIN-PACKAGE    |
|-----------|-----------------|----------------|
| MAX354CPE | 0°C to +70°C    | 16 Plastic DIP |
| MAX354CWE | 0°C to +70°C    | 16 Wide SO     |
| MAX354C/D | 0°C to +70°C    | Dice*          |
| MAX354EPE | -40°C to +85°C  | 16 Plastic DIP |
| MAX354EWE | -40°C to +85°C  | 16 Wide SO     |
| MAX354MJE | -55°C to +125°C | 16 CERDIP**    |
| MAX355CPE | 0°C to +70°C    | 16 Plastic DIP |
| MAX355CWE | 0°C to +70°C    | 16 Wide SO     |
| MAX355C/D | 0°C to +70°C    | Dice*          |
| MAX355EPE | -40°C to +85°C  | 16 Plastic DIP |
| MAX355EWE | -40°C to +85°C  | 16 Wide SO     |
| MAX355MJE | -55°C to +125°C | 16 CERDIP**    |

\* Dice are tested at  $T_A = +25^\circ\text{C}$  only.

\*\* Contact factory for availability.

## Pin Configurations

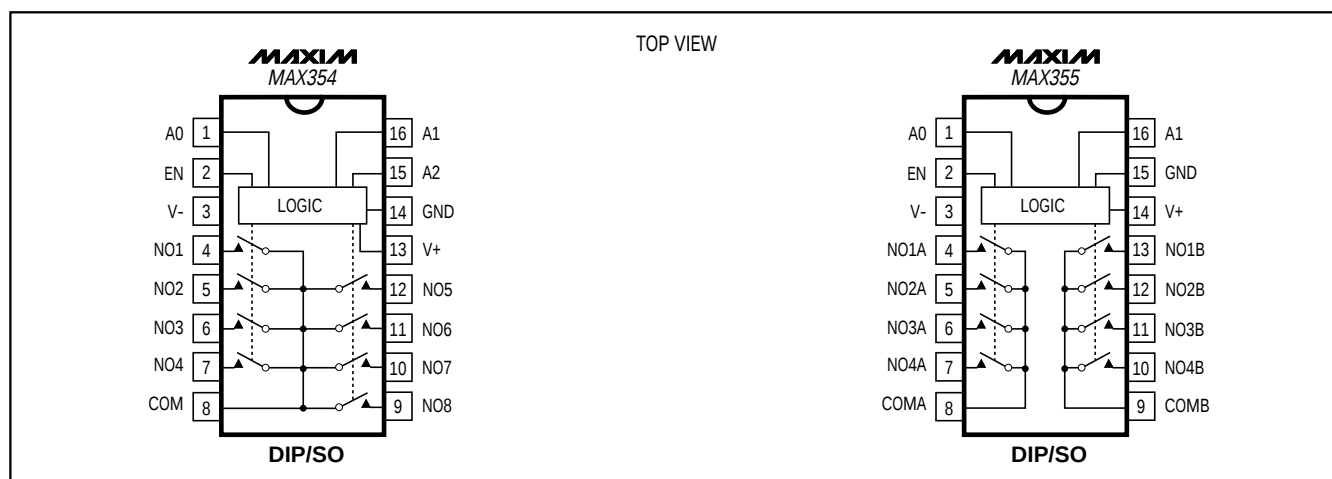

Maxim Integrated Products 1

For free samples & the latest literature: <http://www.maxim-ic.com>, or phone 1-800-998-8800

MAX354/MAX355

# Fault-Protected Analog Multiplexers

## ABSOLUTE MAXIMUM RATINGS

(Voltages referenced to GND, unless otherwise noted.)

|                                      |                                 |
|--------------------------------------|---------------------------------|
| V+                                   | .....-0.3V to +44V              |
| V-                                   | .....+0.3V to -44V              |
| V+ to V-                             | .....-0.3V to +44V              |
| Digital Inputs                       | .....(V+ + 0.3V) to (V- - 0.3V) |
| Input Overvoltage with Mux Power On  |                                 |
| V+ = +15V                            | .....+25V                       |
| V- = -15V                            | .....-25V                       |
| Input Overvoltage with Mux Power Off |                                 |
| V+ = 0V                              | .....+40V                       |
| V- = 0V                              | .....-40V                       |
| Continuous Current into Any Terminal | .....±30mA                      |

|                                                       |                      |
|-------------------------------------------------------|----------------------|
| Peak Current into Any Terminal                        | .....±50mA           |
| Continuous Power Dissipation (T <sub>A</sub> = +70°C) |                      |
| Plastic DIP (derate 10.53mW/°C above +70°C)           | .....842mW           |
| Wide SO (derate 9.52mW/°C above +70°C)                | .....762mW           |
| CERDIP (derate 10.00mW/°C above +70°C)                | .....800mW           |
| Operating Temperature Ranges                          |                      |
| MAX35_C_                                              | .....0°C to +70°C    |
| MAX35_E_                                              | .....-40°C to +85°C  |
| MAX35_M_                                              | .....-55°C to +125°C |
| Storage Temperature Range                             | .....-65°C to +150°C |
| Lead Temperature (soldering, 10sec)                   | .....+300°C          |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

(V+ = +15V, V- = -15V, GND = 0V, V<sub>AH</sub> = V<sub>ENH</sub> = 2.4V, V<sub>AL</sub> = V<sub>ENL</sub> = 0.8V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted.)

| PARAMETER                               | SYMBOL                             | CONDITIONS                                                               |                                                       |                                                       |      | MIN       | TYP  | MAX       | UNITS |
|-----------------------------------------|------------------------------------|--------------------------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|------|-----------|------|-----------|-------|
| SWITCH                                  |                                    |                                                                          |                                                       |                                                       |      |           |      |           |       |
| Analog Signal Range                     | V <sub>COM</sub> , V <sub>NO</sub> | (Note 1)                                                                 |                                                       |                                                       |      | (V+ - 40) |      | (V- + 40) | V     |
| Fault-Free Analog Signal Range          |                                    | V+ = +15V, V- = -15V (Note 1)                                            |                                                       |                                                       |      | -12       |      | 12        | V     |
| On-Resistance (Note 2)                  | R <sub>ON</sub>                    | I <sub>NO</sub> = 1.0mA, V <sub>COM</sub> = ±10V                         | T <sub>A</sub> = +25°C                                |                                                       | 285  | 350       | Ω    |           |       |
|                                         |                                    |                                                                          | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | C, E                                                  | 450  |           |      |           |       |
|                                         |                                    |                                                                          |                                                       | M                                                     | 500  |           |      |           |       |
| On-Resistance Matching Between Channels | ΔR <sub>ON</sub>                   | I <sub>NO</sub> = 1.0mA, V <sub>COM</sub> = ±10V (Note 3)                | T <sub>A</sub> = +25°C                                |                                                       | 7    | 12        | Ω    |           |       |
|                                         |                                    |                                                                          | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> |                                                       | 15   |           |      |           |       |
| NO-Off Leakage Current (Note 4)         | I <sub>NO(OFF)</sub>               | V <sub>COM</sub> = ±10V, V <sub>NO</sub> = ±10V, V <sub>EN</sub> = 0V    | T <sub>A</sub> = +25°C                                |                                                       | -0.5 | 0.01      | 0.5  | nA        |       |
|                                         |                                    |                                                                          | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | C, E                                                  | -5.0 | 5.0       |      |           |       |
|                                         |                                    |                                                                          |                                                       | M                                                     | -50  | 50        |      |           |       |
| COM-Off Leakage Current (Note 4)        | I <sub>COM(OFF)</sub>              | V <sub>COM</sub> = ±10V, V <sub>NO</sub> = ±10V, V <sub>EN</sub> = 0V    | MAX354                                                | T <sub>A</sub> = +25°C                                |      | -0.5      | 0.02 | 0.5       | nA    |
|                                         |                                    |                                                                          |                                                       | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | C, E | -25       | 25   |           |       |
|                                         |                                    | M                                                                        | -100                                                  |                                                       | 100  |           |      |           |       |
|                                         |                                    | V <sub>COM</sub> = ±10V, V <sub>NO</sub> = ±10V, V <sub>EN</sub> = 0V    | MAX355                                                | T <sub>A</sub> = +25°C                                |      | -0.5      | 0.02 | 0.5       |       |
|                                         |                                    |                                                                          |                                                       | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | C, E | -15       | 15   |           |       |
|                                         |                                    | M                                                                        | -50                                                   |                                                       | 50   |           |      |           |       |
| COM-On Leakage Current (Note 4)         | I <sub>COM(ON)</sub>               | V <sub>COM</sub> = ±10V, V <sub>NO</sub> = ±10V, sequence each switch on | MAX354                                                | T <sub>A</sub> = +25°C                                |      | -0.5      | 0.02 | 0.5       | nA    |
|                                         |                                    |                                                                          |                                                       | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | C, E | -30       | 30   |           |       |
|                                         |                                    |                                                                          | M                                                     |                                                       | -200 | 200       |      |           |       |
|                                         |                                    | MAX355                                                                   | T <sub>A</sub> = +25°C                                |                                                       | -0.5 | 0.02      | 0.5  |           |       |
|                                         |                                    |                                                                          | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | C, E                                                  | -15  | 15        |      |           |       |
|                                         |                                    | M                                                                        |                                                       | -100                                                  | 100  |           |      |           |       |

# Fault-Protected Analog Multiplexers

## ELECTRICAL CHARACTERISTICS (continued)

(V+ = +15V, V- = -15V, GND = 0V, V<sub>AH</sub> = V<sub>ENH</sub> = 2.4V, V<sub>AL</sub> = V<sub>ENL</sub> = 0.8V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted.)

| PARAMETER                                          | SYMBOL                              | CONDITIONS                                                                                                                       |                                                       | MIN  | TYP   | MAX | UNITS |
|----------------------------------------------------|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|------|-------|-----|-------|
| FAULT                                              |                                     |                                                                                                                                  |                                                       |      |       |     |       |
| Output Leakage Current<br>(with Overvoltage)       |                                     | V <sub>D</sub> = 0V,<br>analog overvoltage = ±33V                                                                                | T <sub>A</sub> = +25°C                                | -5   | 0.01  | 5   | nA    |
|                                                    |                                     |                                                                                                                                  | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | -2   |       | 2   | μA    |
| Input Leakage Current<br>(with Overvoltage)        |                                     | V <sub>IN</sub> = ±25V, V <sub>O</sub> = ±10V                                                                                    | T <sub>A</sub> = +25°C                                | -0.1 | 0.001 | 0.1 | μA    |
|                                                    |                                     |                                                                                                                                  | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | -2   |       | 2   |       |
| Input Leakage Current<br>(with Power Supplies Off) |                                     | V <sub>IN</sub> = ±25V, V <sub>EN</sub> = V <sub>O</sub> = 0V,<br>V <sub>A0</sub> = V <sub>A1</sub> = V <sub>A2</sub> = 0V or 5V | T <sub>A</sub> = +25°C                                | -0.1 | 0.001 | 0.1 | μA    |
|                                                    |                                     |                                                                                                                                  | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | -2   |       | 2   |       |
| DIGITAL LOGIC INPUT                                |                                     |                                                                                                                                  |                                                       |      |       |     |       |
| Logic High Input Voltage                           | V <sub>A_H</sub> , V <sub>ENH</sub> |                                                                                                                                  | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | 2.4  |       |     | V     |
| Logic Low Input Voltage                            | V <sub>A_L</sub> , V <sub>ENL</sub> |                                                                                                                                  | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> |      |       | 0.8 | V     |
| Input Current with<br>Input Voltage High           | I <sub>A_H</sub> , I <sub>ENH</sub> | V <sub>A</sub> = V <sub>EN</sub> = 2.4V                                                                                          | T <sub>A</sub> = +25°C                                | -1   |       | 1   | μA    |
|                                                    |                                     |                                                                                                                                  | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | -5   |       | 5   |       |
| Input Current with<br>Input Voltage Low            | I <sub>A_L</sub> , I <sub>ENL</sub> | V <sub>A</sub> = V <sub>EN</sub> = 0.8V                                                                                          | T <sub>A</sub> = +25°C                                | -1   |       | 1   | μA    |
|                                                    |                                     |                                                                                                                                  | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | -5   |       | 5   |       |
| SUPPLY                                             |                                     |                                                                                                                                  |                                                       |      |       |     |       |
| Power-Supply Range                                 |                                     |                                                                                                                                  |                                                       | ±4.5 |       | ±18 | V     |
| Positive Supply Current                            | I+                                  | V <sub>EN</sub> = V <sub>A</sub> = 5V                                                                                            | T <sub>A</sub> = +25°C                                | -300 |       | 300 | μA    |
|                                                    |                                     |                                                                                                                                  | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | -500 |       | 500 |       |
| Negative Supply Current                            | I-                                  | V <sub>EN</sub> = V <sub>A</sub> = 0V                                                                                            | T <sub>A</sub> = +25°C                                | -1   |       | 1   | μA    |
|                                                    |                                     |                                                                                                                                  | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> | -100 |       | 100 |       |
| DYNAMIC                                            |                                     |                                                                                                                                  |                                                       |      |       |     |       |
| Transition Time                                    | t <sub>TRANS</sub>                  | Figure1                                                                                                                          | T <sub>A</sub> = +25°C                                |      | 180   | 250 | ns    |
|                                                    |                                     |                                                                                                                                  | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> |      |       | 400 |       |
| Enable Turn-On Time                                | t <sub>ON(EN)</sub>                 | Figure 2                                                                                                                         | T <sub>A</sub> = +25°C                                |      | 160   | 250 | ns    |
|                                                    |                                     |                                                                                                                                  | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> |      |       | 400 |       |
| Enable Turn-Off Time                               | t <sub>OFF(EN)</sub>                | Figure 2                                                                                                                         | T <sub>A</sub> = +25°C                                |      | 80    | 200 | ns    |
|                                                    |                                     |                                                                                                                                  | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub> |      |       | 300 |       |
| Break-Before-Make Interval                         | t <sub>OPEN</sub>                   | Figure 3                                                                                                                         | T <sub>A</sub> = +25°C                                | 50   | 100   |     | ns    |
| Charge Injection                                   | V <sub>CTE</sub>                    | C <sub>L</sub> = 10nF, V <sub>S</sub> = 0V, R <sub>S</sub> = 0Ω,<br>Figure 4                                                     | T <sub>A</sub> = +25°C                                |      | 80    |     | pC    |
| Off Isolation                                      | V <sub>ISO</sub>                    | V <sub>EN</sub> = 0V, R <sub>L</sub> = 1kΩ, f = 100kHz,<br>Figure 5                                                              | T <sub>A</sub> = +25°C                                |      | 100   |     | dB    |
| Crosstalk Between Channels                         | V <sub>CT</sub>                     | V <sub>EN</sub> = 2.4V, f = 100kHz,<br>V <sub>GEN</sub> = 1V <sub>p-p</sub> , R <sub>L</sub> = 1kΩ,<br>Figure 6                  | T <sub>A</sub> = +25°C                                |      | 92    |     | dB    |
| Logic Input Capacitance                            | C <sub>IN</sub>                     | f = 1MHz, Figure 7                                                                                                               | T <sub>A</sub> = +25°C                                |      | 2.5   |     | pF    |
| NO-Off Capacitance                                 | C <sub>NO(OFF)</sub>                | f = 1MHz, V <sub>EN</sub> = V <sub>D</sub> = 0V                                                                                  | T <sub>A</sub> = +25°C                                |      | 1.6   |     | pF    |

# Fault-Protected Analog Multiplexers

## ELECTRICAL CHARACTERISTICS (continued)

( $V_+ = +15V$ ,  $V_- = -15V$ ,  $GND = 0V$ ,  $V_{AH} = V_{ENH} = 2.4V$ ,  $V_{AL} = V_{ENL} = 0.8V$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.)

| PARAMETER               | SYMBOL         | CONDITIONS                                    | MIN                 | TYP                 | MAX | UNITS   |
|-------------------------|----------------|-----------------------------------------------|---------------------|---------------------|-----|---------|
| <b>DYNAMIC (cont'd)</b> |                |                                               |                     |                     |     |         |
| COM-Off Capacitance     | $C_{COM(OFF)}$ | $f = 1MHz$ , Figure 7,<br>$V_{EN} = V_D = 0V$ | MAX354              | $T_A = +25^\circ C$ | 11  | pF      |
|                         |                |                                               |                     |                     | 5   |         |
| COM-On Capacitance      | $C_{COM(ON)}$  | $f = 1MHz$ , Figure 7,<br>$V_{EN} = V_D = 0V$ | MAX355              | $T_A = +25^\circ C$ | 28  | pF      |
|                         |                |                                               |                     |                     | 14  |         |
| Setting Time (Note 5)   | $t_{SETT}$     | 0.1%                                          | $T_A = +25^\circ C$ |                     | 1   | $\mu s$ |
|                         |                | 0.01%                                         |                     |                     | 2.5 |         |

**Note 1:** When the analog signal exceeds  $+13.5V$  or  $-13.5V$ , the blocking action of Maxim's gate structure goes into operation. Only leakage currents flow, and the channel on-resistance rises to infinity (see *Typical Operating Characteristics*).

**Note 2:** Electrical characteristics such as on-resistance will change when power supplies other than  $\pm 15V$  are used.


**Note 3:**  $\Delta R_{ON} = R_{ON(MAX)} - R_{ON(MIN)}$

**Note 4:** Leakage parameters are 100% tested at maximum rated hot operating temperature, and guaranteed by correlation at  $+25^\circ C$ .

**Note 5:** Guaranteed by design.

## Typical Operating Characteristics



( $T_A = +25^\circ C$ , unless otherwise noted.)

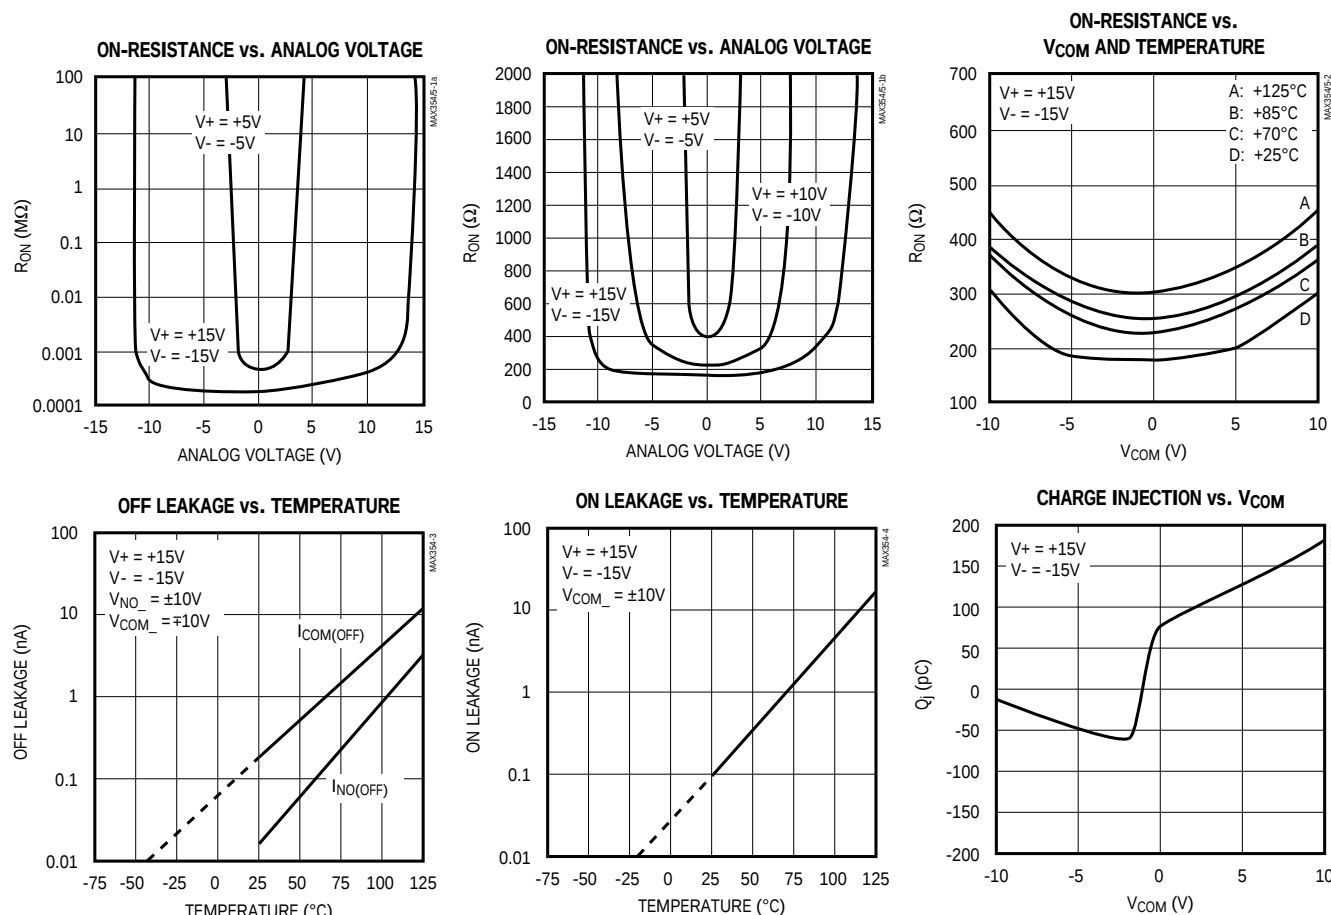

# Fault-Protected Analog Multiplexers

## Typical Operating Characteristics (continued)

(T<sub>A</sub> = +25°C, unless otherwise noted.)

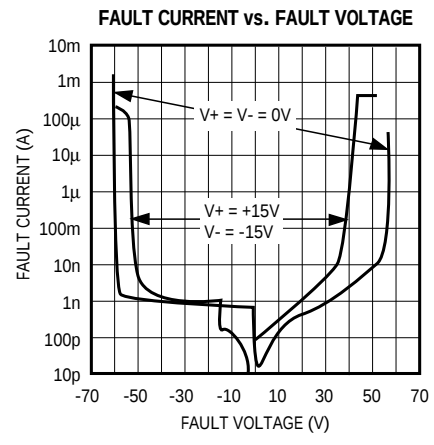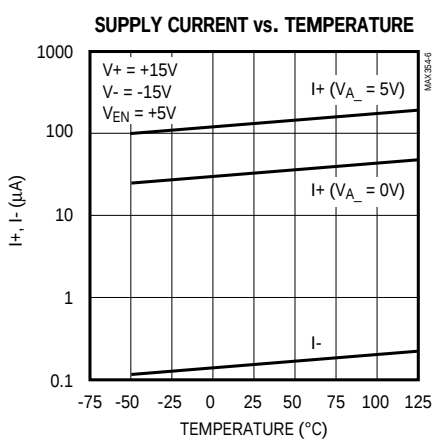

## Pin Description

| PIN       |        | NAME       | FUNCTION                                                                   |
|-----------|--------|------------|----------------------------------------------------------------------------|
| MAX354    | MAX355 |            |                                                                            |
| 1, 15, 16 | —      | A0, A2, A1 | Address Logic Inputs                                                       |
| —         | 1, 16  | A0, A1     | Address Logic Inputs                                                       |
| 2         | 2      | EN         | Enable Logic Input. See truth tables.                                      |
| 3         | 3      | V-         | Negative Supply Voltage Input. Connect to GND for single-supply operation. |
| 4–7       | —      | NO1–NO4    | Analog Inputs—bidirectional                                                |
| —         | 4–7    | NO1A–NO4A  | Analog Inputs—bidirectional “A” switch                                     |
| 8         | —      | COM        | Analog Output—bidirectional                                                |
| —         | 8, 9   | COMA, COMB | Analog Outputs—bidirectional                                               |
| 9–12      | —      | NO8–NO5    | Analog Inputs—bidirectional                                                |
| —         | 10–13  | NO4B–NO1B  | Analog Inputs—bidirectional “B” switch                                     |
| 13        | 14     | V+         | Positive Supply Voltage Input                                              |
| 14        | 15     | GND        | Ground                                                                     |

**Note:** Analog inputs and outputs are electrically identical and completely interchangeable.

# Fault-Protected Analog Multiplexers

## Test Circuits/Timing Diagrams

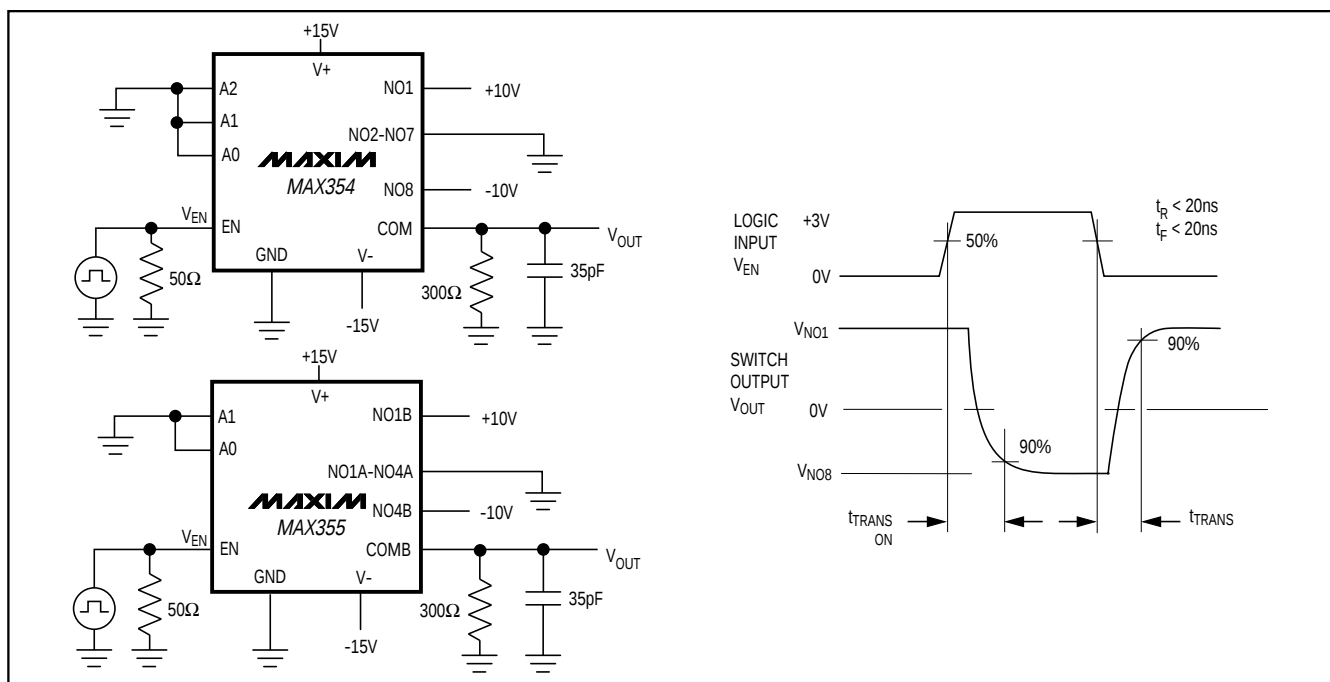


Figure 1. Transition Time

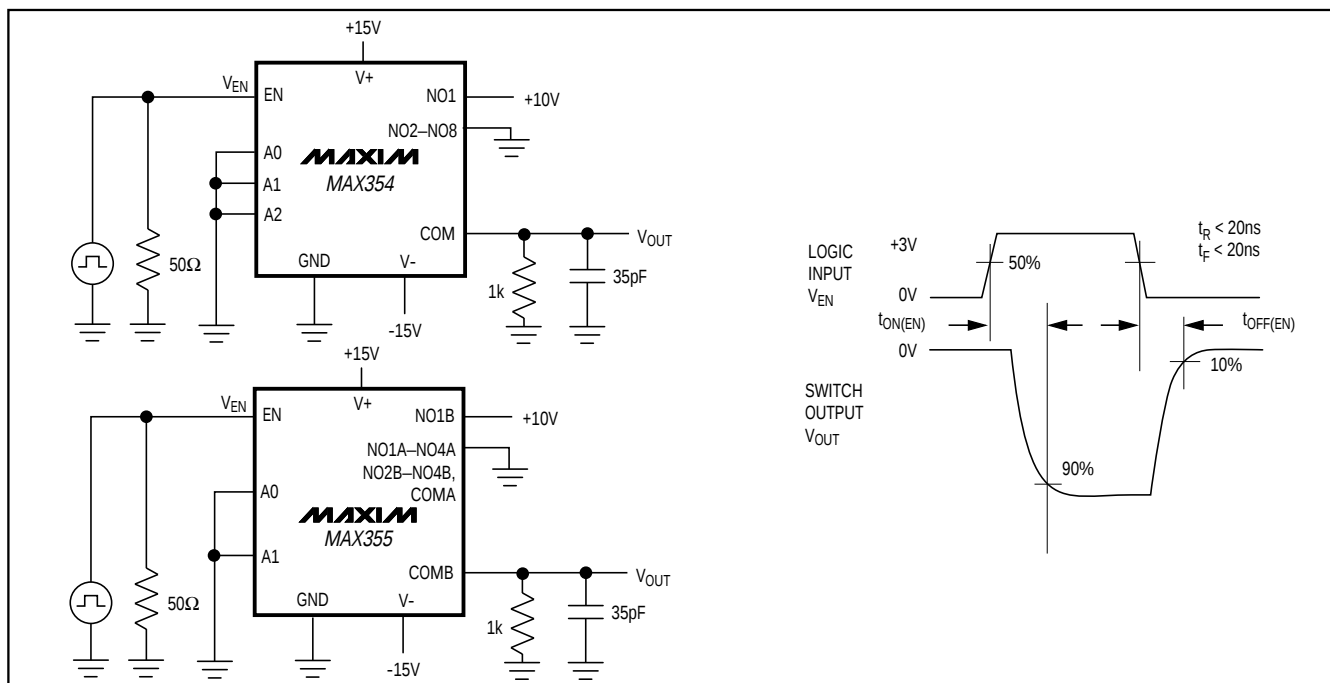


Figure 2. Enable Switching Time

# Fault-Protected Analog Multiplexers

## Test Circuits/Timing Diagrams (continued)

MAX354/MAX355

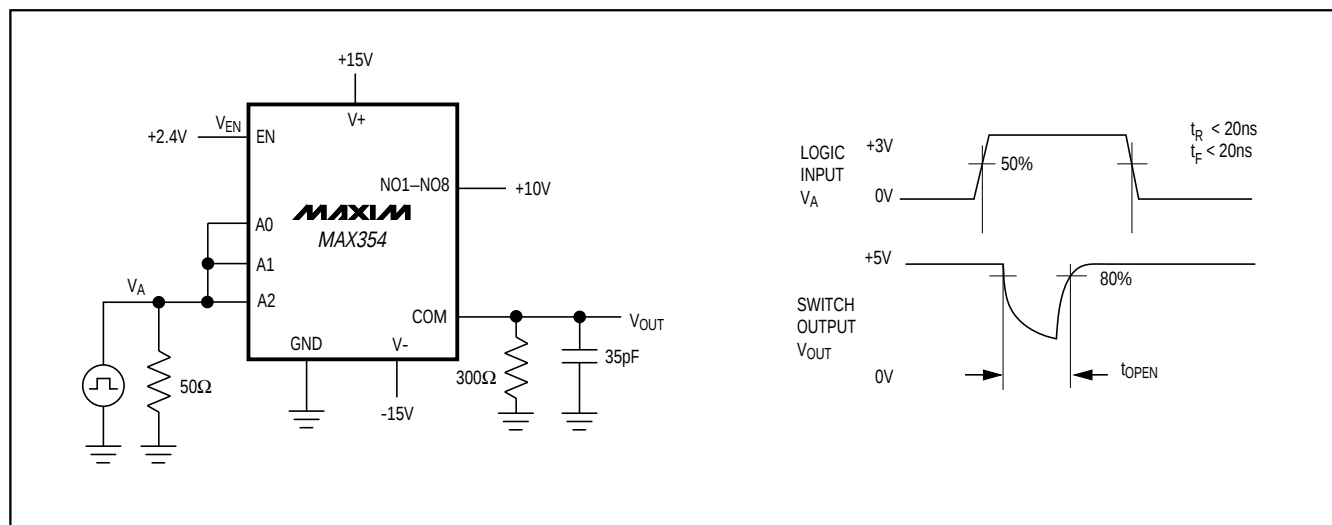


Figure 3. Break-Before-Make Interval

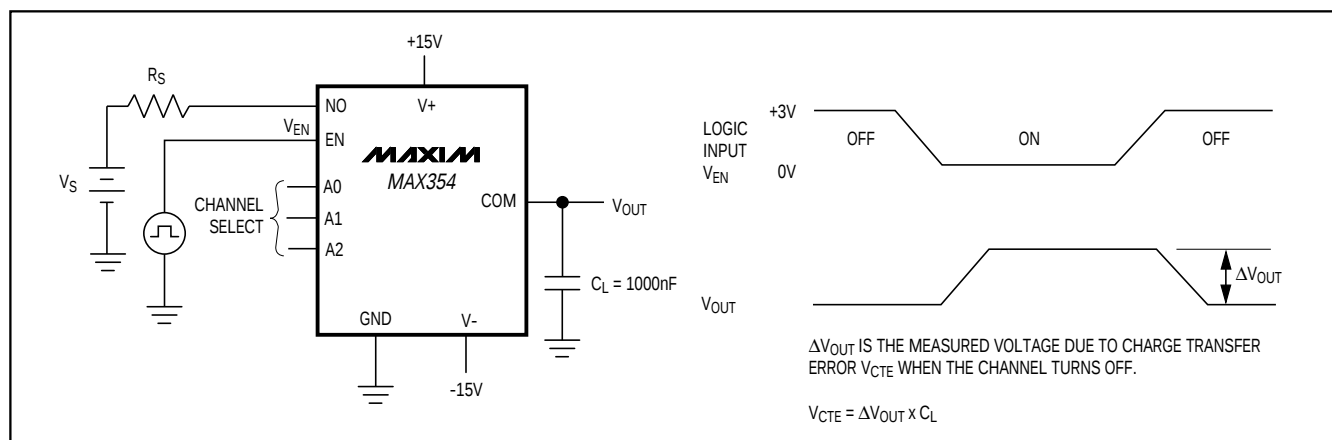


Figure 4. Charge Injection

# Fault-Protected Analog Multiplexers

## Test Circuits/Timing Diagrams (continued)

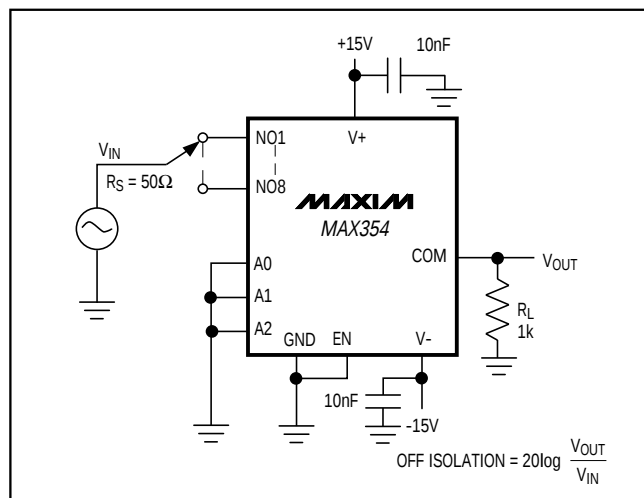


Figure 5. Off Isolation

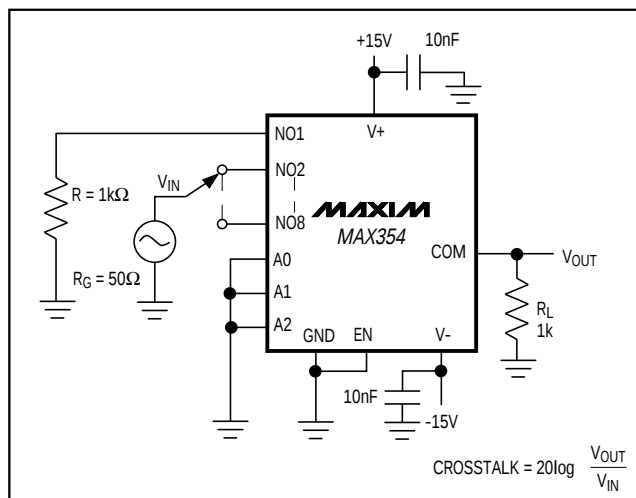


Figure 6. Crosstalk

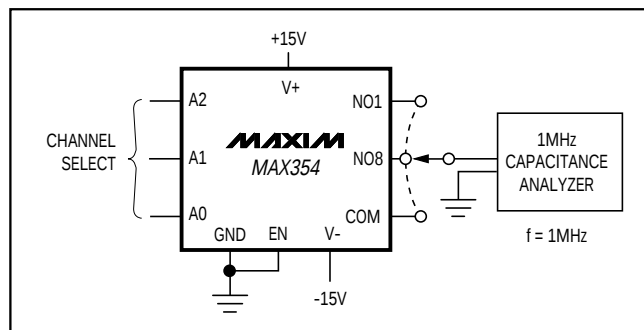


Figure 7. NO/COM Capacitance

## Detailed Description

### Fault-Protection Circuitry

Maxim's MAX354/MAX355 are fully fault protected for continuous input voltages up to  $\pm 40V$ , whether or not the  $V+$  and  $V-$  power supplies are present. These devices use a "series FET" protection scheme that not only protects the multiplexer output from overvoltage, but also limits the input current to sub-microamp levels. When signal voltages exceed or are within approximately 1.5V of the supply rails, on-resistance increases. This greater on-resistance limits fault currents and output voltage, protecting sensitive circuits and components. The protected output clamps at approximately

1.5V below the supply rails and maintains the correct polarity. There are no glitches or polarity reversals going into or coming out of a fault condition.

Figures 8 and 9 show how the series FET circuit protects against overvoltage conditions. When power is off, the gates of all three FETs are at ground. With a -25V input, N-channel FET Q1 is turned on by the +25V gate-to-source voltage. The P-channel device (Q2), however, has +25V  $V_{GS}$  and is turned off, thereby preventing the input signal from reaching the output. If the input voltage is +25V, Q1 has a negative  $V_{GS}$ , which turns it off. Similarly, only sub-microamp leakage currents can flow from the output back to the input, since any voltage will turn off either Q1 or Q2.

# Fault-Protected Analog Multiplexers

Figure 10 shows the condition of an off channel with V+ and V- present. As with Figures 8 and 9, either an N-channel or a P-channel device will be off for any input voltage from -40V to +40V. The leakage current with negative overvoltages will immediately drop to a few nanoamps at +25°C. For positive overvoltages, that fault current will initially be 10μA or 20μA, decaying over a few seconds to the nanoamp level. The time constant of this decay is caused by the discharge of stored charge from internal nodes and does not compromise the fault-protection scheme.

Figure 11 shows the condition of the on channel with V+ and V- present. With input voltages less than ±10V, all three FETs are on and the input signal appears at the output. If the input voltage exceeds V+ minus the N-channel threshold voltage ( $V_{TN}$ ), the N-channel FET will turn off. For voltages more negative than V- minus the P-channel threshold ( $V_{TP}$ ), the P-channel device will turn off. Since  $V_{TN}$  is typically 1.5V and  $V_{TP}$  is typically 3V, the multiplexer's output swing is limited to about -12V to +13.5V with ±15V supplies.

## Switching Characteristics and Charge Injection

Table 1 shows typical charge injection levels versus power-supply voltages and analog input voltage. The charge injection that occurs during switching creates a voltage transient whose magnitude is inversely proportional to the capacitance on the multiplexer output.

**Table 1. MAX354 Charge Injection**

| Supply Voltage | Analog Input Level | Injected Charge |
|----------------|--------------------|-----------------|
| ±5V            | +2V                | 52pC            |
|                | 0V                 | 35pC            |
|                | -2V                | 16pC            |
| ±10V           | +5V                | 105pC           |
|                | 0V                 | 65pC            |
|                | -5V                | 25pC            |
| ±15V           | +10V               | 180pC           |
|                | 0V                 | 80pC            |
|                | -10V               | 15pC            |

Test Conditions:  $C_L$  = 1000pF on mux output; the tabulated analog input level is applied to channel 1; channels 2–8 inputs are open circuited.  $EN$  = +5V,  $V_{A1} = V_{A2} = 0V$ ,  $V_O$  is toggled at a 2kHz rate between 0V and 3V. +100pC of charge creates a +100mV step when injected into a 1000pF load capacitance.

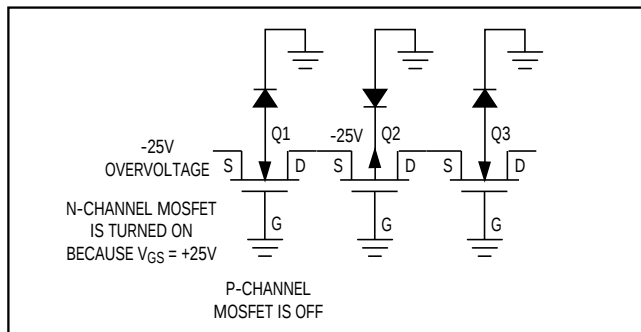


Figure 8. -25V Overvoltage with Multiplexer Power Off

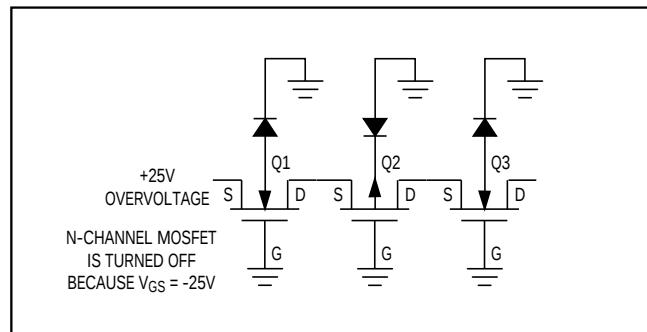


Figure 9. +25V Overvoltage with Multiplexer Power Off

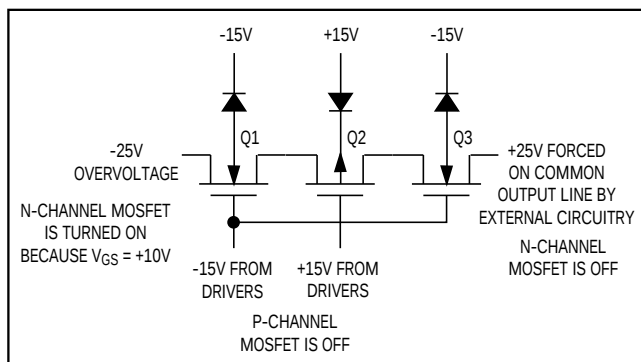


Figure 10. -25V Overvoltage on an Off Channel with Multiplexer Power Supply On

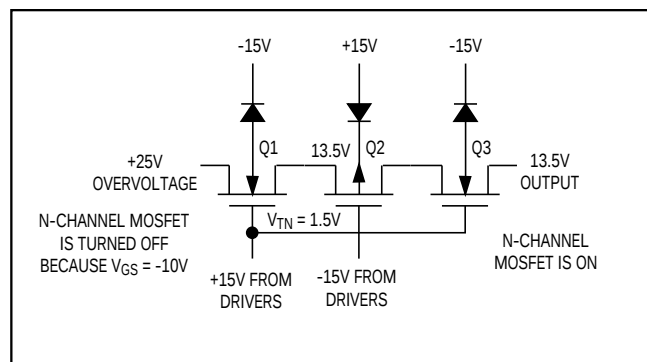


Figure 11. +25V Overvoltage Input to the On Channel

## Fault-Protected Analog Multiplexers

The channel-to-channel switching time is typically 180ns, with about 100ns of break-before-make delay. This 100ns break-before-make delay prevents the input-to-input short that would occur if two input channels were simultaneously connected to the output. In a typical data acquisition system, the dominant delay is not the switching time of the multiplexer, but is the settling time of the amplifiers and S/H. Another limiting factor is the RC time constant of the multiplexer  $R_{ON}$  plus the signal source impedance multiplied by the load capacitance on the output of the multiplexer. Even with low signal source impedances, 100pF of capacitance on the multiplexer output will approximately double the settling time to 0.01% accuracy.

### Operation with Supply Voltages Other than $\pm 15V$

The main effect of supply voltages other than  $\pm 15V$  is the reduction in output signal range. The MAX354 limits the output voltage to about 1.5V below  $V+$  and about 3V above  $V-$ . In other words, the output swing is limited to +3.5V to -2V when operating from  $\pm 5V$ . The *Typical Operating Characteristics* show  $R_{ON}$  for +15V and  $\pm 5V$  power supplies. Maxim tests and guarantees the MAX354/MAX355 for operation from  $\pm 4.5V$  to  $\pm 18V$  supplies. The switching delays are increased by about a factor of 2 at  $\pm 5V$ , but break-before-make action is preserved.

The MAX354/MAX355 can operate with a single +4.5V to +30V supply, as well as asymmetrical power supplies such as +15V and -5V. The digital threshold remains approximately 1.6V above the GND pin, and the analog characteristics, such as  $R_{ON}$ , are determined by the total voltage difference between  $V+$  and  $V-$ . Connect  $V-$  to 0V when operating with a +4.5V to +30V single supply.

The MAX354 digital threshold is relatively independent of the power-supply voltages, going from 1.6V typical when  $V+$  is 15V to 1.5V typical when  $V+$  is 5V. This means that the MAX354/MAX355 operate with standard TTL-logic levels, even with  $\pm 5V$  power supplies. In all cases, the threshold of the enable (EN) pin is the same as the other logic inputs.

### Digital Interface Levels

The typical digital threshold of both the address lines and the enable pin is 1.6V, with a temperature coefficient of about  $-3mV/^{\circ}C$ . This ensures compatibility with 0.8V to 2.4V TTL-logic swings over the entire temperature range. The digital threshold is relatively independent of the supply voltages, moving from 1.6V typical to 1.5V typical as the power supplies are reduced from  $\pm 15V$  to  $\pm 5V$ . In all cases, the digital threshold is referenced to the GND pin.

The digital inputs can also be driven with CMOS-logic levels swinging from either  $V+$  to  $V-$  or from  $V+$  to ground. The digital input current is just a few nanoamps of leakage at all input voltage levels, with a guaranteed maximum of 1 $\mu A$ .

### Operation as a Demultiplexer

The MAX354/MAX355 function as demultiplexers where the input is applied to the output pin, and the input pins are used as outputs. The MAX354/MAX355 provide both break-before-make action and full fault protection when operated as demultiplexers, unlike earlier generations of fault-protected muxes.

### Channel-to-Channel Crosstalk, Off-Isolation, and Digital Feedthrough

At DC and low frequencies the channel-to-channel crosstalk is caused by variations in output leakage currents as the off-channel input voltages are varied. The MAX354 output leakage varies only a few picoamps as all seven off inputs are toggled from -10V to +10V. The output voltage change depends on the impedance level at the MAX354 output, which is  $R_{ON}$  plus the input signal source resistance in most cases, since the load driven by the MAX354 is usually high impedance. For a signal source impedance of 10k $\Omega$  or lower, the DC crosstalk exceeds 120dB.

Tables 2a and 2b show typical AC crosstalk and off-isolation performance. Digital feedthrough is masked by the analog charge injection when the output is enabled. When the output is disabled, the digital feedthrough is virtually unmeasurable, since the digital pins are physically isolated from the analog section by the GND and  $V-$  pins. The ground plane formed by these lines is continued onto the MAX354/MAX355 die to provide over 100dB isolation between the digital and analog sections.

# Fault-Protected Analog Multiplexers

**Table 2a. Typical Off-Isolation Rejection Ratio**

| Frequency          | 100kHz | 1MHz |
|--------------------|--------|------|
| One Channel Driven | 100dB  | 80dB |

Test Conditions:  $V_{IN} = 20V_{p-p}$  at the tabulated frequency,  $R_L = 1.5k\Omega$  between OUT and ground,  $EN = 0V$ .

$$V_{ISO} = 20 \log \frac{20V_{p-p}}{V_{OUT} (p-p)}$$

**Table 2b. Typical Crosstalk Rejection Ratio**

| Frequency          | 100kHz | 1MHz |
|--------------------|--------|------|
| $R_L = 1.5k\Omega$ | 92dB   | 72dB |
| $R_L = 10k\Omega$  | 76dB   | 56dB |

Test Conditions: Specified  $R_L$  connected from OUT to ground,  $EN = +5V$ ,  $A_0 = A_1 = A_2 = +5V$  (Channel 1 selected).  $20V_{p-p}$  at the tabulated frequency is applied to Channel 2. All other channels are open circuited. Similar crosstalk rejection can be observed between any two channels.

## Functional Diagrams/Truth Tables

| MAX354 |    |    |    |           |
|--------|----|----|----|-----------|
| A2     | A1 | A0 | EN | ON SWITCH |
| X      | X  | X  | 0  | NONE      |
| 0      | 0  | 0  | 1  | 1         |
| 0      | 0  | 1  | 1  | 2         |
| 0      | 1  | 0  | 1  | 3         |
| 0      | 1  | 1  | 1  | 4         |
| 1      | 0  | 0  | 1  | 5         |
| 1      | 0  | 1  | 1  | 6         |
| 1      | 1  | 0  | 1  | 7         |
| 1      | 1  | 1  | 1  | 8         |


LOGIC "0"  $V_{AL} \leq +0.8V$ , LOGIC "1"  $V_{AH} \geq +2.4V$

| MAX355 |    |    |           |
|--------|----|----|-----------|
| A1     | A0 | EN | ON SWITCH |
| X      | X  | 0  | NONE      |
| 0      | 0  | 1  | 1         |
| 0      | 1  | 1  | 2         |
| 1      | 0  | 1  | 3         |
| 1      | 1  | 1  | 4         |

LOGIC "0"  $V_{AL} \leq +0.8V$ , LOGIC "1"  $V_{AH} \geq +2.4V$

# Fault-Protected Analog Multiplexers

## Chip Topographies

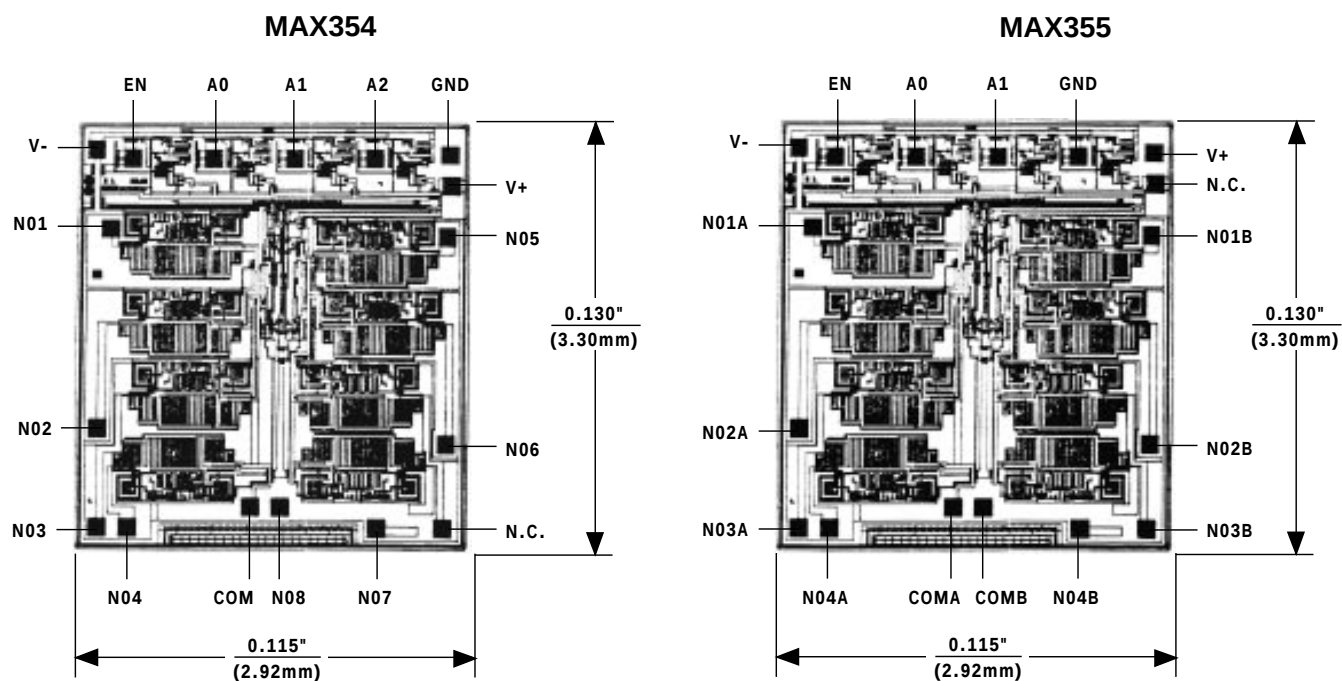

TRANSISTOR COUNT: 256  
SUBSTRATE CONNECTED TO V+

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600

© 1996 Maxim Integrated Products

Printed USA

**MAXIM** is a registered trademark of Maxim Integrated Products.