
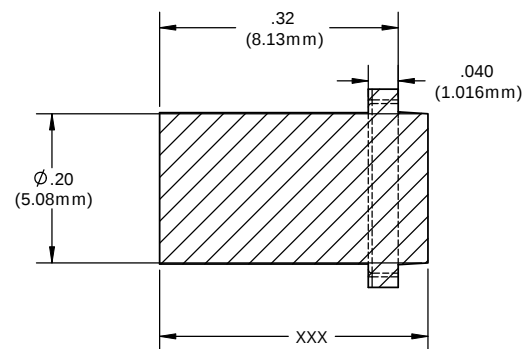
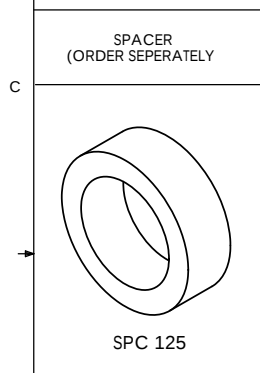
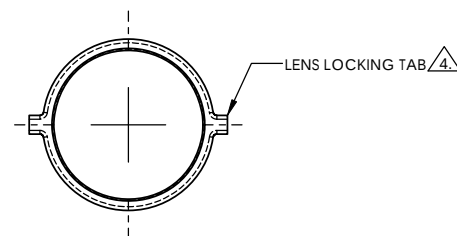


NOTES:

1. DESIGN: Lens mounts the Litepipe securely to display panel providing 180° viewing angle
2. MOUNTING: Panel mounting hole .250 (6.35mm) on 3/8" centers
3. PANEL THICKNESS: For CLB 300 and SQB 400: 1/32" to 1/4".
For Panels less than 3/16" use SPC 125
4. LENS LOCK: Insert Litepipe into lens aligning the tabs with the lens slot
5. Standoff used to adjust the height of a standard LED above the PCB and maintain a maximum .050" clearance between the Litepipe and LED.
6. Length is from front of panel to LED
7. Custom lengths available upon request (Minimum order quantity may apply)
8. U.S. & Foreign Pat. Issued and Pend.




REVISIONS				
ECN #	REV	DESCRIPTION	DATE	INITIALS
	N/A	INITIAL RELEASE	1/25/96	JS
	001	REVISED PER ECN111009AZ01	4/23/10	KH

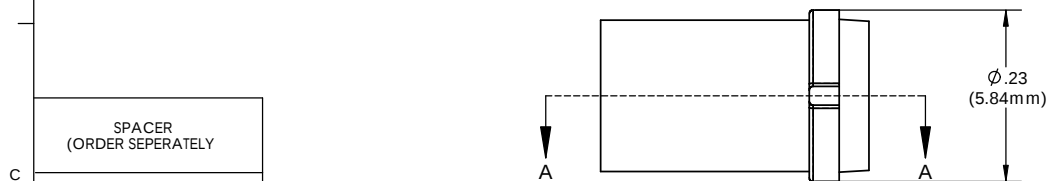

SECTION A-A

ORDERING CODE:
LCV XXX CTP

LENGTH CODE		COLOR	
036	= .360"	CTP	CLEAR
056	.560"		
076	.760"		
096	.960"		
116	1.160"		
136	1.360"		
CUSTOM LENGTHS AVAILABLE UPON REQUEST (SEE NOTE 7)			



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES:		MATERIAL		VISUAL COMMUNICATIONS COMPANY, INC.		
ANGLES ±1°	DECIMALS .X ±.020 .XX ±.010 .XXX ±.005	ACRYLIC (OPTICAL GRADE) U.L. 94-HB		190 Bosstick Boulevard, Suite 101 San Marcos, CA 92069 USA Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vccite.com		
BREAK ALL CORNERS AND SHARP EDGES 90° MIN.		FINISH SEE NOTES		TITLE: 5MM ROUND LITEPIPE		
 THIRD ANGLE PROJECTION		APPROVAL		SIZE		DWG. NO.
FURNISHMENT AND CONVEYANCE AND SHIP TO THE LOCAL DISTRIBUTOR FOR THE CUSTOMER'S USE. THE LOCAL DISTRIBUTOR SHALL BE RESPONSIBLE FOR THE DELIVERY OF THE GOODS TO THE CUSTOMER'S LOCATION.		DRAWN K.Howard		DATE		REV
		CHECKED DPZ		4/23/10		001
		DO NOT SCALE DRAWING		SCALE: 6:1		
				SHEET 1 OF 1		