


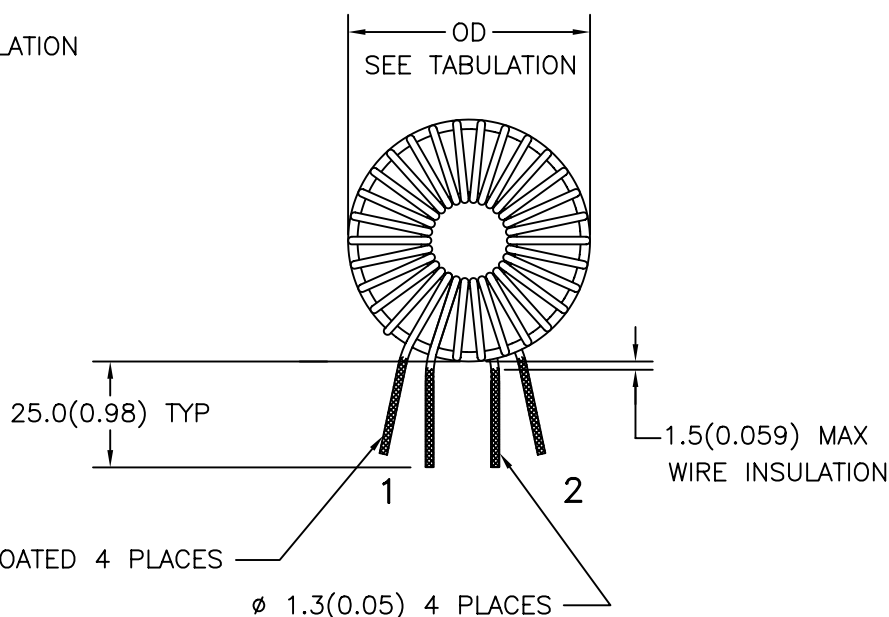


REV. Status	TCA NO.	MODEL NO.	RATED CURRENT (ADC)	INDUCTANCE (uH)±20%	DCR (mohm MAX)	OD	HT
REVISION – 05/06/98 TS	P-A4-10052-01	SKC-201	10	30	6.0	32.0(1.26)	18.0(0.71)
	P-A4-10052-02	SKC-202	10	50	8.4	37.0(1.46)	20.0(0.79)
	P-A4-10052-03	SKC-203	10	100	14.4	37.0(1.46)	20.0(0.79)
	P-A4-10052-04	SKC-204	10	150	16.8	44.0(1.73)	26.0(1.02)
	P-A4-10052-05	SKC-205	10	200	13.2	54.0(2.13)	25.0(0.98)

Schematic Diagram;

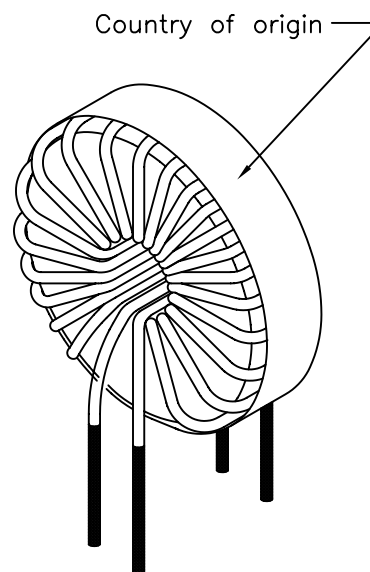

Mechanical Specifications;

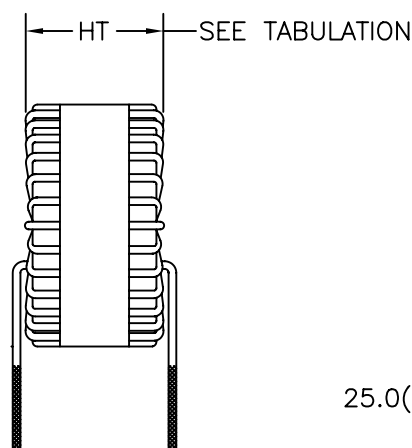

SKC-201~205

PREPARED BY:

D. Kelley

ENGINEER:

T. Shiozawa

QUALITY CONTROL:

D. Kelley

APPROVED:

D. Suzuki

NOTE: Inductance is measured at 1 KHz, 1 Vrms with specified DC current

DWG CONTROL NO.  
P-A4-10052  
ACAD\MISCX\A4100521.DWG

REV  
—

POWER INDUCTOR FOR  
SWITCH MODE POWER SUPPLIES

**TAMURA CORPORATION OF AMERICA**  
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624  
(909) 699-1270 FAX 9096769482

**SKC-201~205**

MODEL SPECIFICATION

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.