

CAN BUS Varistor



GENERAL DESCRIPTION

The CAN BUS varistor is a zinc oxide (ZnO) based ceramic semiconductor devices with non-linear voltage-current characteristics (bi-directional) similar to back-to-back Zener diodes and an EMC capacitor in parallel (see equivalent circuit model). They have the added advantage of greater current and energy handling capabilities as well as EMI/RFI attenuation. Devices are fabricated by a ceramic sintering process that yields a structure of conductive ZnO grains surrounded by electrically insulating barriers, creating varistor like behavior.

HOW TO ORDER

CAN

Style

Controlled Area Network Varistor Series

0001

Case Size

0001 = 0603 Discrete
0002 = 0405 2-Element
0004 = 0612 4-Element

D

Packaging Code (Reel Size)

D = 7" reel (1,000 pcs)
R = 7" reel (4,000 pcs)
T = 13" reel (10,000 pcs)


P

Termination


P = Plated (Ni/Sn Alloy)



0603
Discrete




0405
Array



0612
Array


PERFORMANCE CHARACTERISTICS

PARAMETER	
Working Voltage	up to 18V
Breakdown Voltage	65-75 V
Transient Energy	0.015 J (max) @ 10/1000 μ S
Capacitance	22 pF @ 1 kHz
Peak Current	4A @ 8/20 μ S
Turn On Time	≤ 600 pS

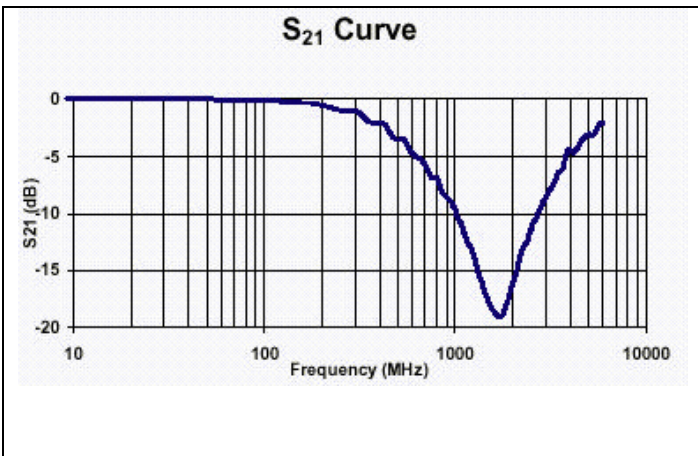

EQUIVALENT CIRCUIT MODEL

Discrete MLV Model

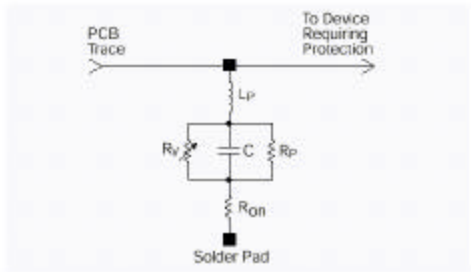


Where: R_v = Voltage Variable resistance (per VI curve)

$R_p \geq 10^{12} \Omega$

C = defined by voltage rating and energy level

R_{on} = turn on resistance

L_p = parallel body inductance

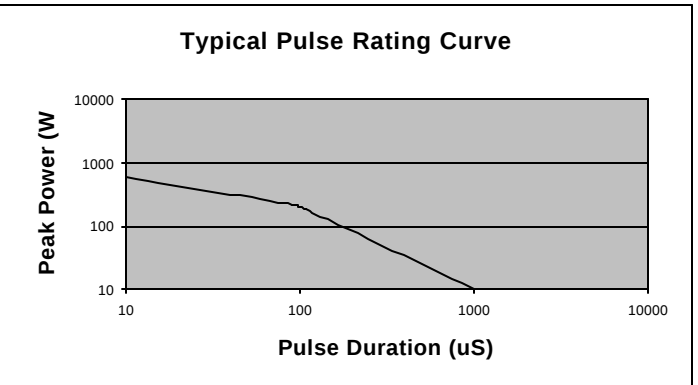

CAN BUS Varistor




PHYSICAL DIMENSIONS


mm (inches)

	0603 Discrete	0405 Array	0612 Array
Length	1.6 ± 0.15 (0.063 ± 0.006)	1.00 ± 0.15 (0.039 ± 0.006)	3.20 ± 0.2 (0.126 ± 0.008)
Width	0.8 ± 0.15 (0.032 ± 0.006)	1.37 ± 0.15 (0.054 ± 0.006)	1.6 ± 0.2 (0.063 ± 0.008)
Thickness	0.9 MAX (0.035 MAX)	0.66 MAX (0.026 MAX)	1.22 MAX (0.048 MAX)
Term Band Width	0.35 ± 0.15 (0.014 ± 0.006)	0.36 ± 0.10 (0.014 ± 0.004)	0.41 ± 0.10 (0.016 ± 0.010)
Term Separation	0.7 (0.028)	0.32 ± 0.10 (0.013 ± 0.004)	0.38 ± 0.10 (0.015 ± 0.004)

SOLDER PAD DIMENSIONS mm (inches)




0603 Discrete



0405 Array

A	B	C	D	E
0.46 (0.018)	0.74 (0.029)	1.2 (0.047)	0.38 (0.015)	0.64 (0.025)




0612 Array

A	B	C	D	E
0.89 (0.035)	1.65 (0.065)	2.54 (0.100)	0.46 (0.018)	0.79 (0.030)

APPLICATION

AVX CAN BUS varistors offer significant advantages in general areas of a typical CAN network as shown on the right. Some of the advantages over diodes include:

- space savings
- higher ESD capability @ 25kv contact
- higher in rush current (4A) 8 x 20μS
- FIT rate ≤0.1 failures (per billion hours)

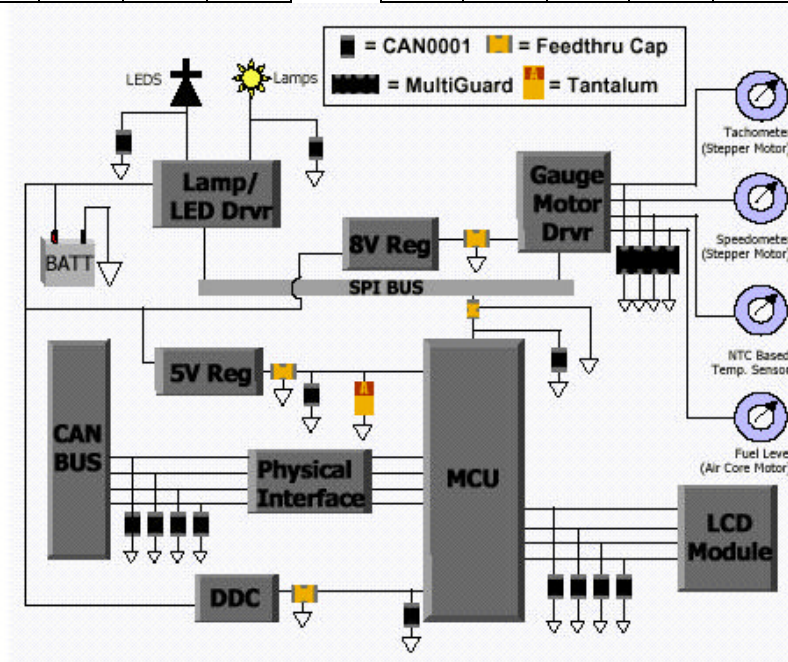

USA

AVX Myrtle Beach, SC
Corporate Offices
Tel: 843-448-9411
FAX: 843-626-5186

AVX Northwest, WA
Tel: 360-669-8746
FAX: 360-699-8751

AVX North Central, IN
Tel: 317-848-7153
FAX: 317-848-9314

AVX Northeast, MA
Tel: 508-485-8114
FAX: 508-485-8471

AVX Mid Pacific, CA
Tel: 408-436-5400
FAX: 408-437-1500

AVX Southwest, AZ
Tel: 602-539-1496
FAX: 602-539-1501

AVX South Central
Tel: 972-669-1223
FAX: 972-669-2090

AVX Southeast, NC
Tel: 919-878-6223
FAX: 919-878-6462

AVX Canada
Tel: 905-564-8959
FAX: 905-564-9728

EUROPE

AVX Limited, England
European Headquarters
Tel: ++44-1252-770000
FAX: ++44-1252-770001

AVX S.A., France
Tel: ++33-69-18-4600
FAX: ++33-69-28-7387

AVX GmbH, Germany – AVX
Tel: ++49-8131-9004-0
FAX: ++49-8131-9004-44

AVX GmbH, Germany – Elco
Tel: ++49-2741-2990
FAX: ++49-2741-299133

AVX srl, Italy
Tel: ++3902-615-2571
FAX: ++3902-615-2576

AVX sro, Czech Republic
Tel: ++420-467-558340
FAX: ++420-467-558345

ASIA-PACIFIC

AVX/Kyocera, Singapore
Asia-Pacific Headquarters
Tel: (65) 258-2833
FAX: (65) 350-4880

AVX/Kyocera, Hong Kong
Tel: (852) 2-363-3303
FAX: (852) 2-765-8185

AVX/Kyocera, Korea
Tel: (82) 2-785-6504
FAX: (82) 2-784-5411

AVX/Kyocera, Taiwan
Tel: (886) 2-2696-4636
FAX: (886) 2-2696-4237

AVX/Kyocera, China
Tel: (86) 21-6249-0314-16
FAX: (86) 21-6249-0313

AVX/Kyocera, Malaysia
Tel: (60) 4-228-1190
FAX: (60) 4-228-1196

Elco, Japan
Tel: 045-943-2906/7
FAX: 045-943-2910

Kyocera, Japan – AVX
Tel: (81) 75-604-3426
FAX: (81) 75-604-3425

Kyocera, Japan – KDP
Tel: (81) 75-604-3424
FAX: (81) 75-604-3425

