

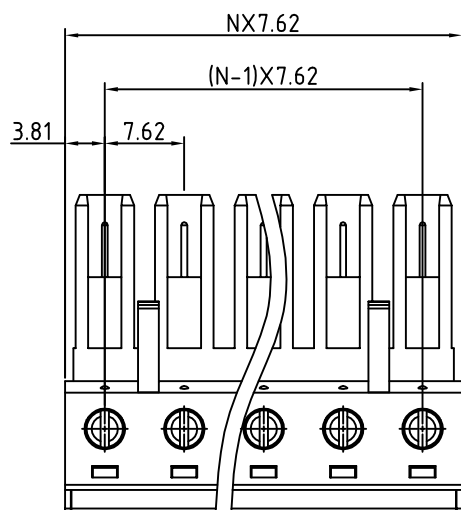


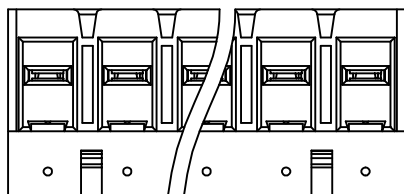

N=Number of poles

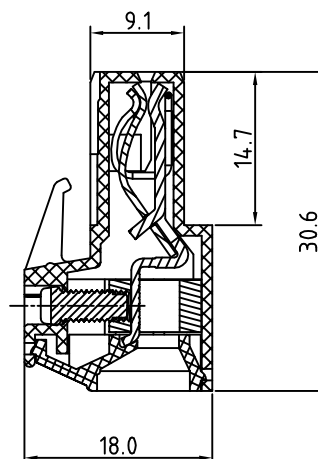

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Terminal body(Contact pin) : Brass(CuZn)
- Terminal screw: SteelZinc plating"-slot type
- Wire guard : PhBz(CuSn) ,tin plated
- Spring: Stainless steel
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 300V
- Current rating: 20A
- Wire range:
 - Solid wire(AWG): 10-30
 - Stranded wire(AWG): 10-30
- Torque(Lb-In): 4.5
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Safety Approval:

RoHS Compliant

PART NUMBER:

OSTVBXX0150

No. of Poles
02: 2 Poles
:
12: 12 Poles

COLOR
0: Black
5: Green (Standard)
6: Blue
8: Grey



TITLE		OSTVB-7.62mm Series 2p-12p					
PART NO.	OSTVBXX0150			DWG NO.	8VB0001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
Shi Jun 2006.10.25	Marvin 2006.10.25	Marvin 2006.10.25	Marvin 2006.10.25		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
					REV.: D	X.XX	±0.10
				SHEET: 01/01		X°	±1°