


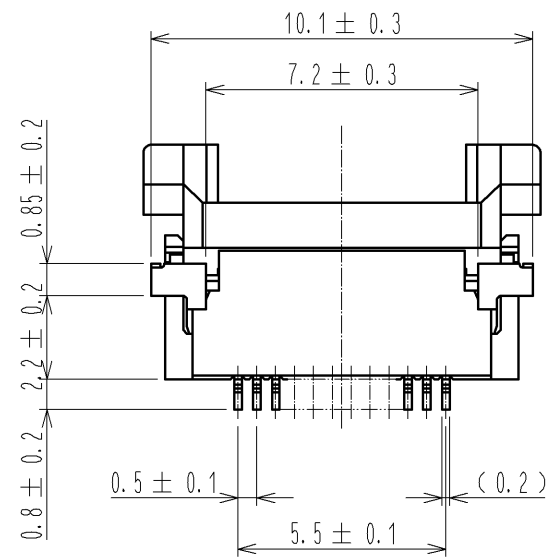
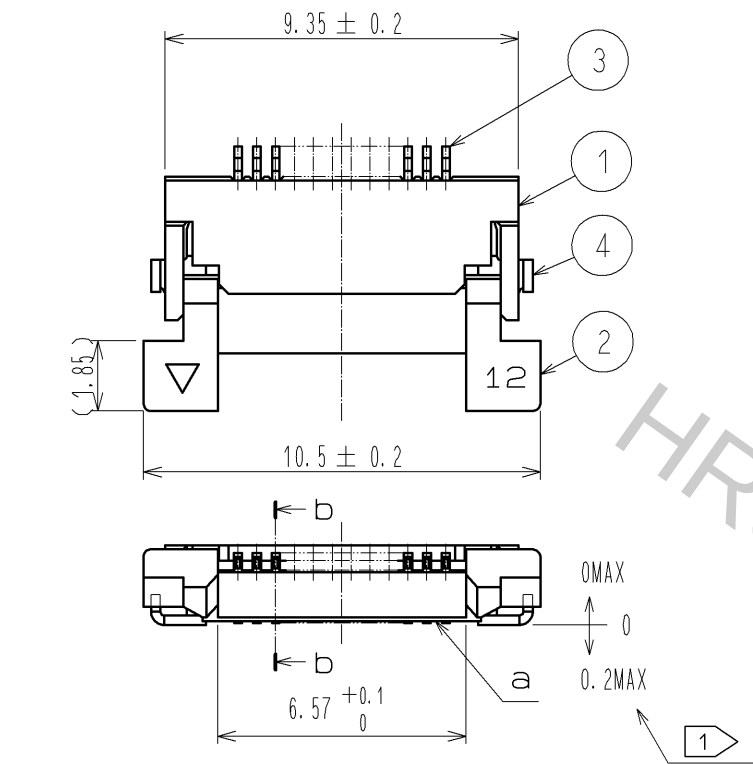


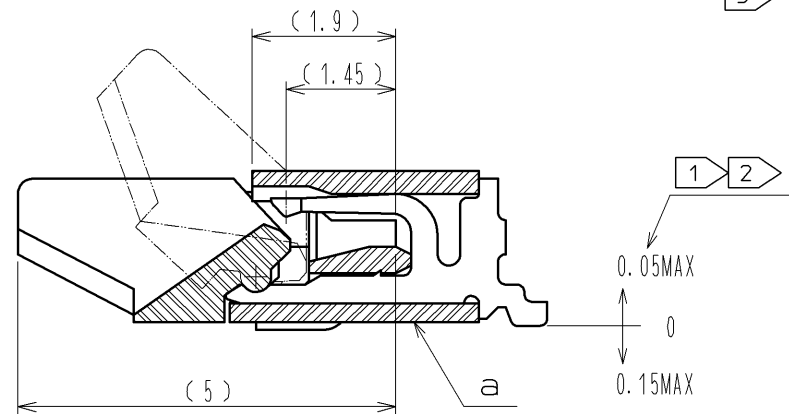

b-b (10 : 1)

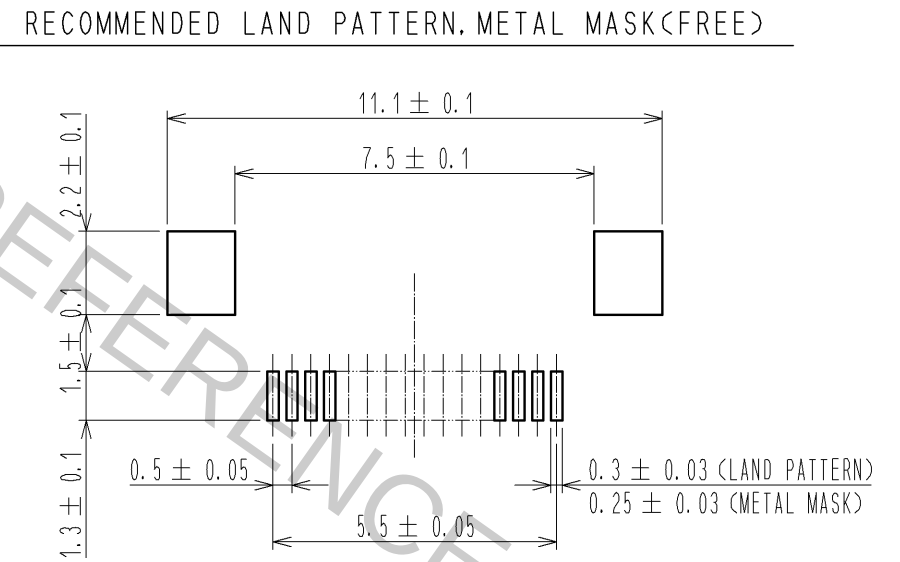


- NOTE 1 REFERENCE IS a.
2 LEAD CO-PLANARITY SHALL BE 0.1 MAX.
3 THICKNESS OF SUPPORTING TAPE SHALL BE 0.188(7.5mil) MIN.

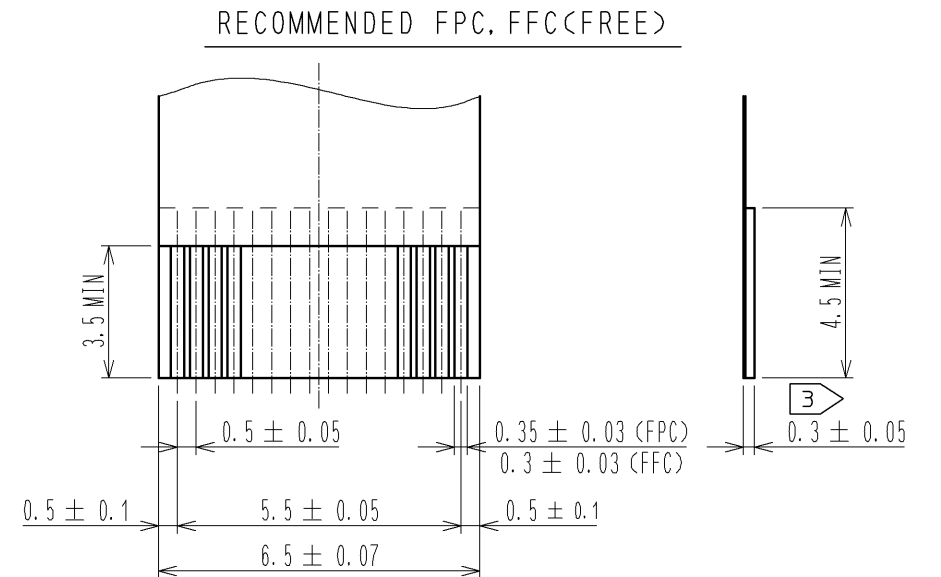


RECOMMENDED METAL MASK THICKNESS t=0.15

4	BRASS	TIN PLATING 1μmMIN OVER NICKEL 1μmMIN.	8	(CONNECTOR)	
3	PHOSPHOR BRONZE	GOLD PLATING 0.05μmMIN OVER NICKEL 1μmMIN.	7	POLYSTYRENE	
2	PPS	DEEP BROWN UL94V-0	6	POLYESTER	
1	POLYAMIDE	BEIGE UL94V-0	5	POLYSTYRENE	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm	SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-003410	DESIGNED MK. YASUMI	CHECKED FN. TAMURA
APPROVED : RI. TAKAYASU	08.09.02	DRAWING NO.	EDC3-152957-51		
CHECED : HS. SAKAMOTO	08.09.01	PART NO.	FH12A-12S-0.5SH(55)		
DESIGNED : MK. YASUMI	08.08.26	CODE NO.	CL586-0696-4-55		
DRAWN : MK. YASUMI	08.08.26				



EMBOSSED CARRIER TAPE DIMENSION(2:1)

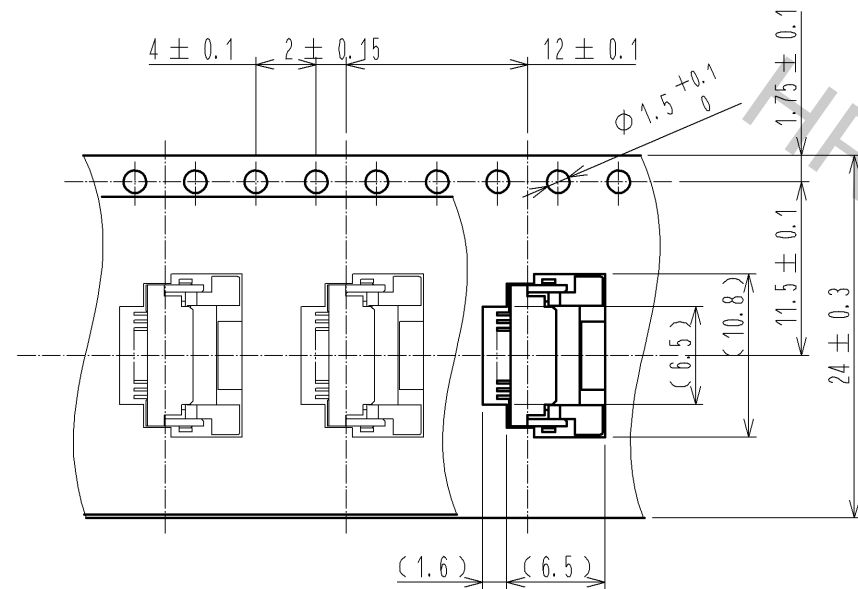

DIRECTION OF UNREELING



REEL DIMENSION(FREE)

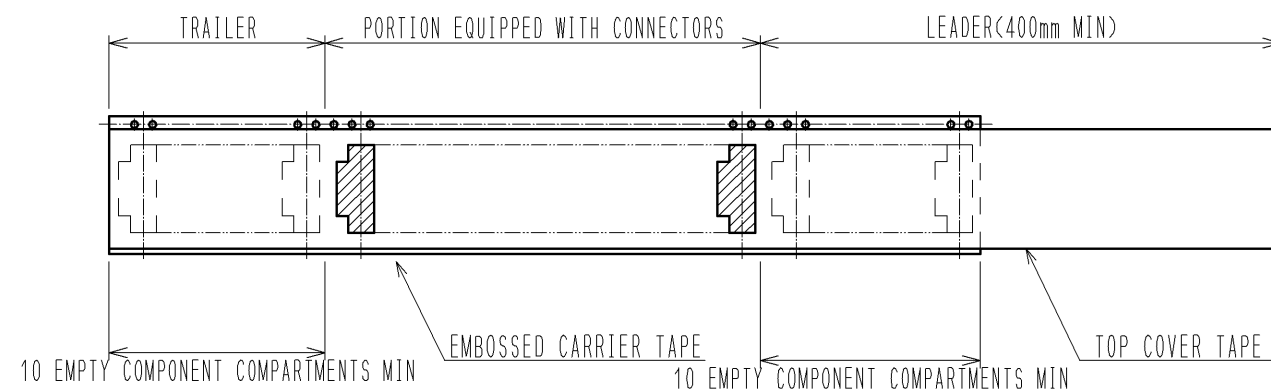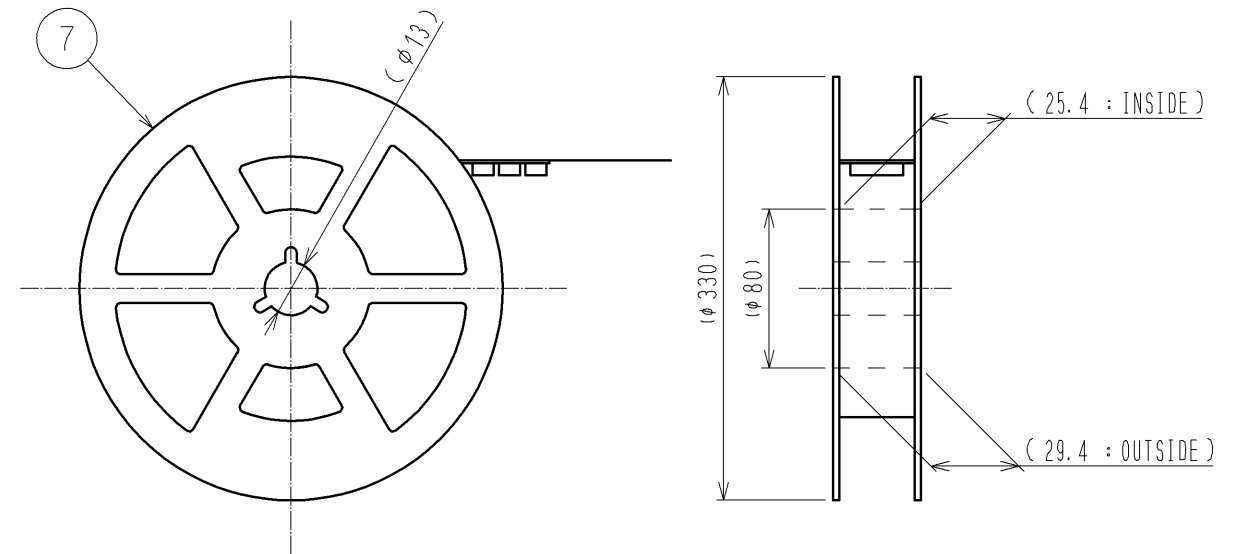

NOTE 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
5 1 REEL:2000 CONNECTORS.

<DRAWING FOR PACKING>

HRS	DRAWING NO.	EDC3-152957-51
	PART NO.	FH12A-12S-0.5SH(55)
	CODE NO.	CL586-0696-4-55
		$\triangle$ 2/2