
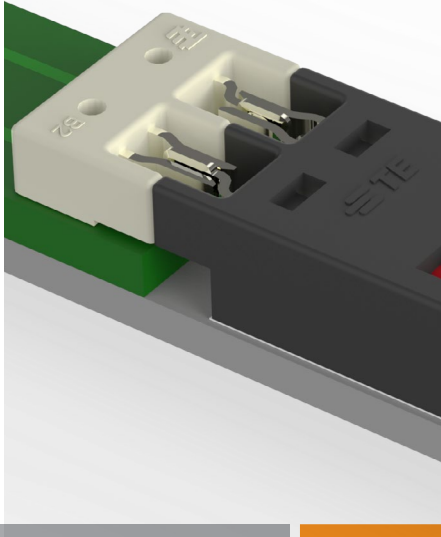


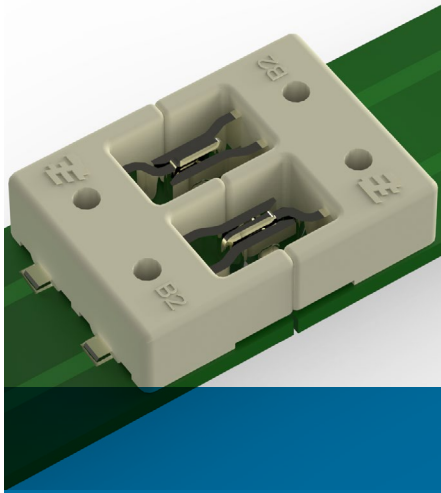


MINIATURE HERMAPHRODITIC CONNECTOR SYSTEM

Low profile board to board
and NEW wire to board connectors

Miniature Hermaphroditic Connector

The low profile SMT miniature hermaphroditic board-to-board connectors are designed to provide power between adjacent linear printed circuit boards. Ideal for use in compact spaces with features designed for vacuum pick and place that make it suitable for high volume automated manufacturing.

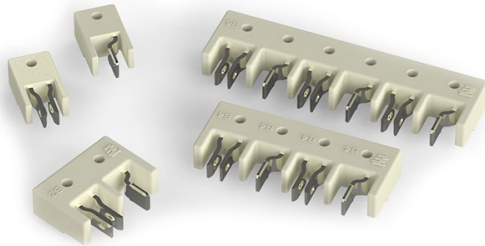

Electrical

- **Current Rating:** 3 A max.
- **Voltage Rating:** 300 VAC / DC (UL)
50 VAC / DC (TUV)
- **Dielectric Withstanding Voltage:** 1600 VAC

Mechanical

- **Operating Temperature:** -40°C to +105°C (UL)
-35°C to 65°C (TUV)

Materials


- **Housing:** High temperature thermoplastic UL 94V-0
- **Contacts:** Copper alloy, tin over nickel plated

Standards and Specifications

- **Product Specification:** 108-106050
- **Application Specification:** 114-106050
- **UL and cUL Recognized:** File No. E321453
- **EN 60838-1 & EN 60838-2-2:** Certificate No. 50280860

Product Offering

Part Number	Description
1971567-1	2 position hermaphroditic board to board connector
1971567-2	4 position hermaphroditic board to board connector
1971567-3	6 position hermaphroditic board to board connector
2213203-1	2 position mini hermaphroditic insert molded wire to board lead assembly <i>(mates with 1971567-1)</i>
1971742-1	1 position blade board to board connector
1971743-1	1 position receptacle board to board connector
2213610-1	2 position mini hermaphroditic assy with posts
2213610-2	4 position mini hermaphroditic assy with posts
2213610-3	6 position mini hermaphroditic assy with posts

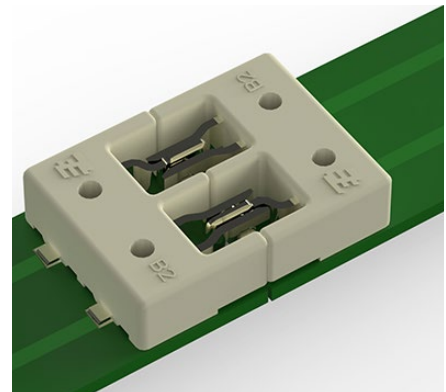

Key Benefits

- Reduce assembly time, minimize inventory and lower production costs with connectors that mate and un-mate to themselves horizontally and vertically
- Connect data and control signals with 2, 4 and 6 position hermaphroditic versions
- Automate production with flat top surface for vacuum pick and place assembly
- Support re-flow processing with high temperature material

Applications

- Architectural and sign lighting
- Retail and display lighting
- Fluorescent LED retrofit lighting
- Cabinet or furniture lighting
- Commercial / residential cove lighting
- Access control equipment
- Thermostats
- Vending Machines

