Stacked coin Type

Series: NF

■ Feature

Endurance: 70°C 1000 h

Japan






■ Recommended Applications

Memory back-up for Video, Audio, Camera, Telephones, Printer,
Date terminal, Rice cooker and intelligent remote conroller

■ Specifications

Category temp. range	-25 to +70°C					
Maximum Operating Voltage	5.5 V .DC					
Nominal Cap. Range	0.1 to 1.5 F					
Characteristics at Low Temperature	Capasitance change	±30% of initial measured value at +20°C (-25 to +70°C)				
	Internal resistance	< 5 times of initial measured value at +20°C (at -25°C)				
Endurance	After 1000 hours application of 5.5V. DC at +70°C, the capacitor shall meet the following limits.					
	Capasitance change	±30% of initial measured value				
	Internal resistance	< 4 time of initial specified value				
Shelf Life	After 1000 hours storage at +70°C without load, the capacitor shall meet the specified limits for Endurance.					
Moisture Resistance	After 500 hours storage at +55°C, 90 to 95% R.H., the capacitor shall meet the specified limits for "Endurance".					

■ Dimensions in mm (not to scale)

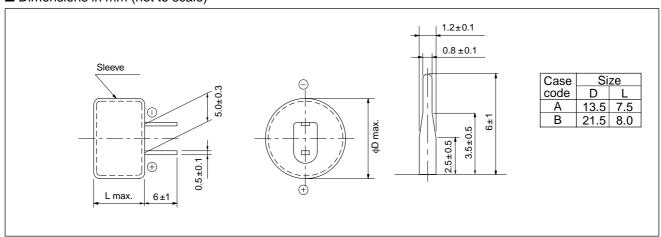

■ Standard products

= otalisata producto									
Maximum Operating Voltage (V.DC)	Capacitance	Capacitance range (F)	internal resistance (Ω) at 1kHz	Case code	Part number	Min. Packaging QTY.			
						Quantity per box	Quantity per outer		
	(F)			- art named	(pcs)	packaging (pcs)			
(1.50)	(- /	(.)	(32) at TRITE			(pc3)	(рсз)		
5.5	0.10	0.08 to 0.18	< 75	A	EECF5R5U104	200	2000		
	0.22	0.176 to 0.396	< 75	Α	EECF5R5U224	200	2000		
	0.47	0.376 to 1.410	< 30	В	EECF5R5U474	100	500		
	1.0	0.80 to 1.80	< 30	В	EECF5R5U105	100	500		
	1.5	1.20 to 2.70	< 30	В	EECF5R5U155	100	500		