


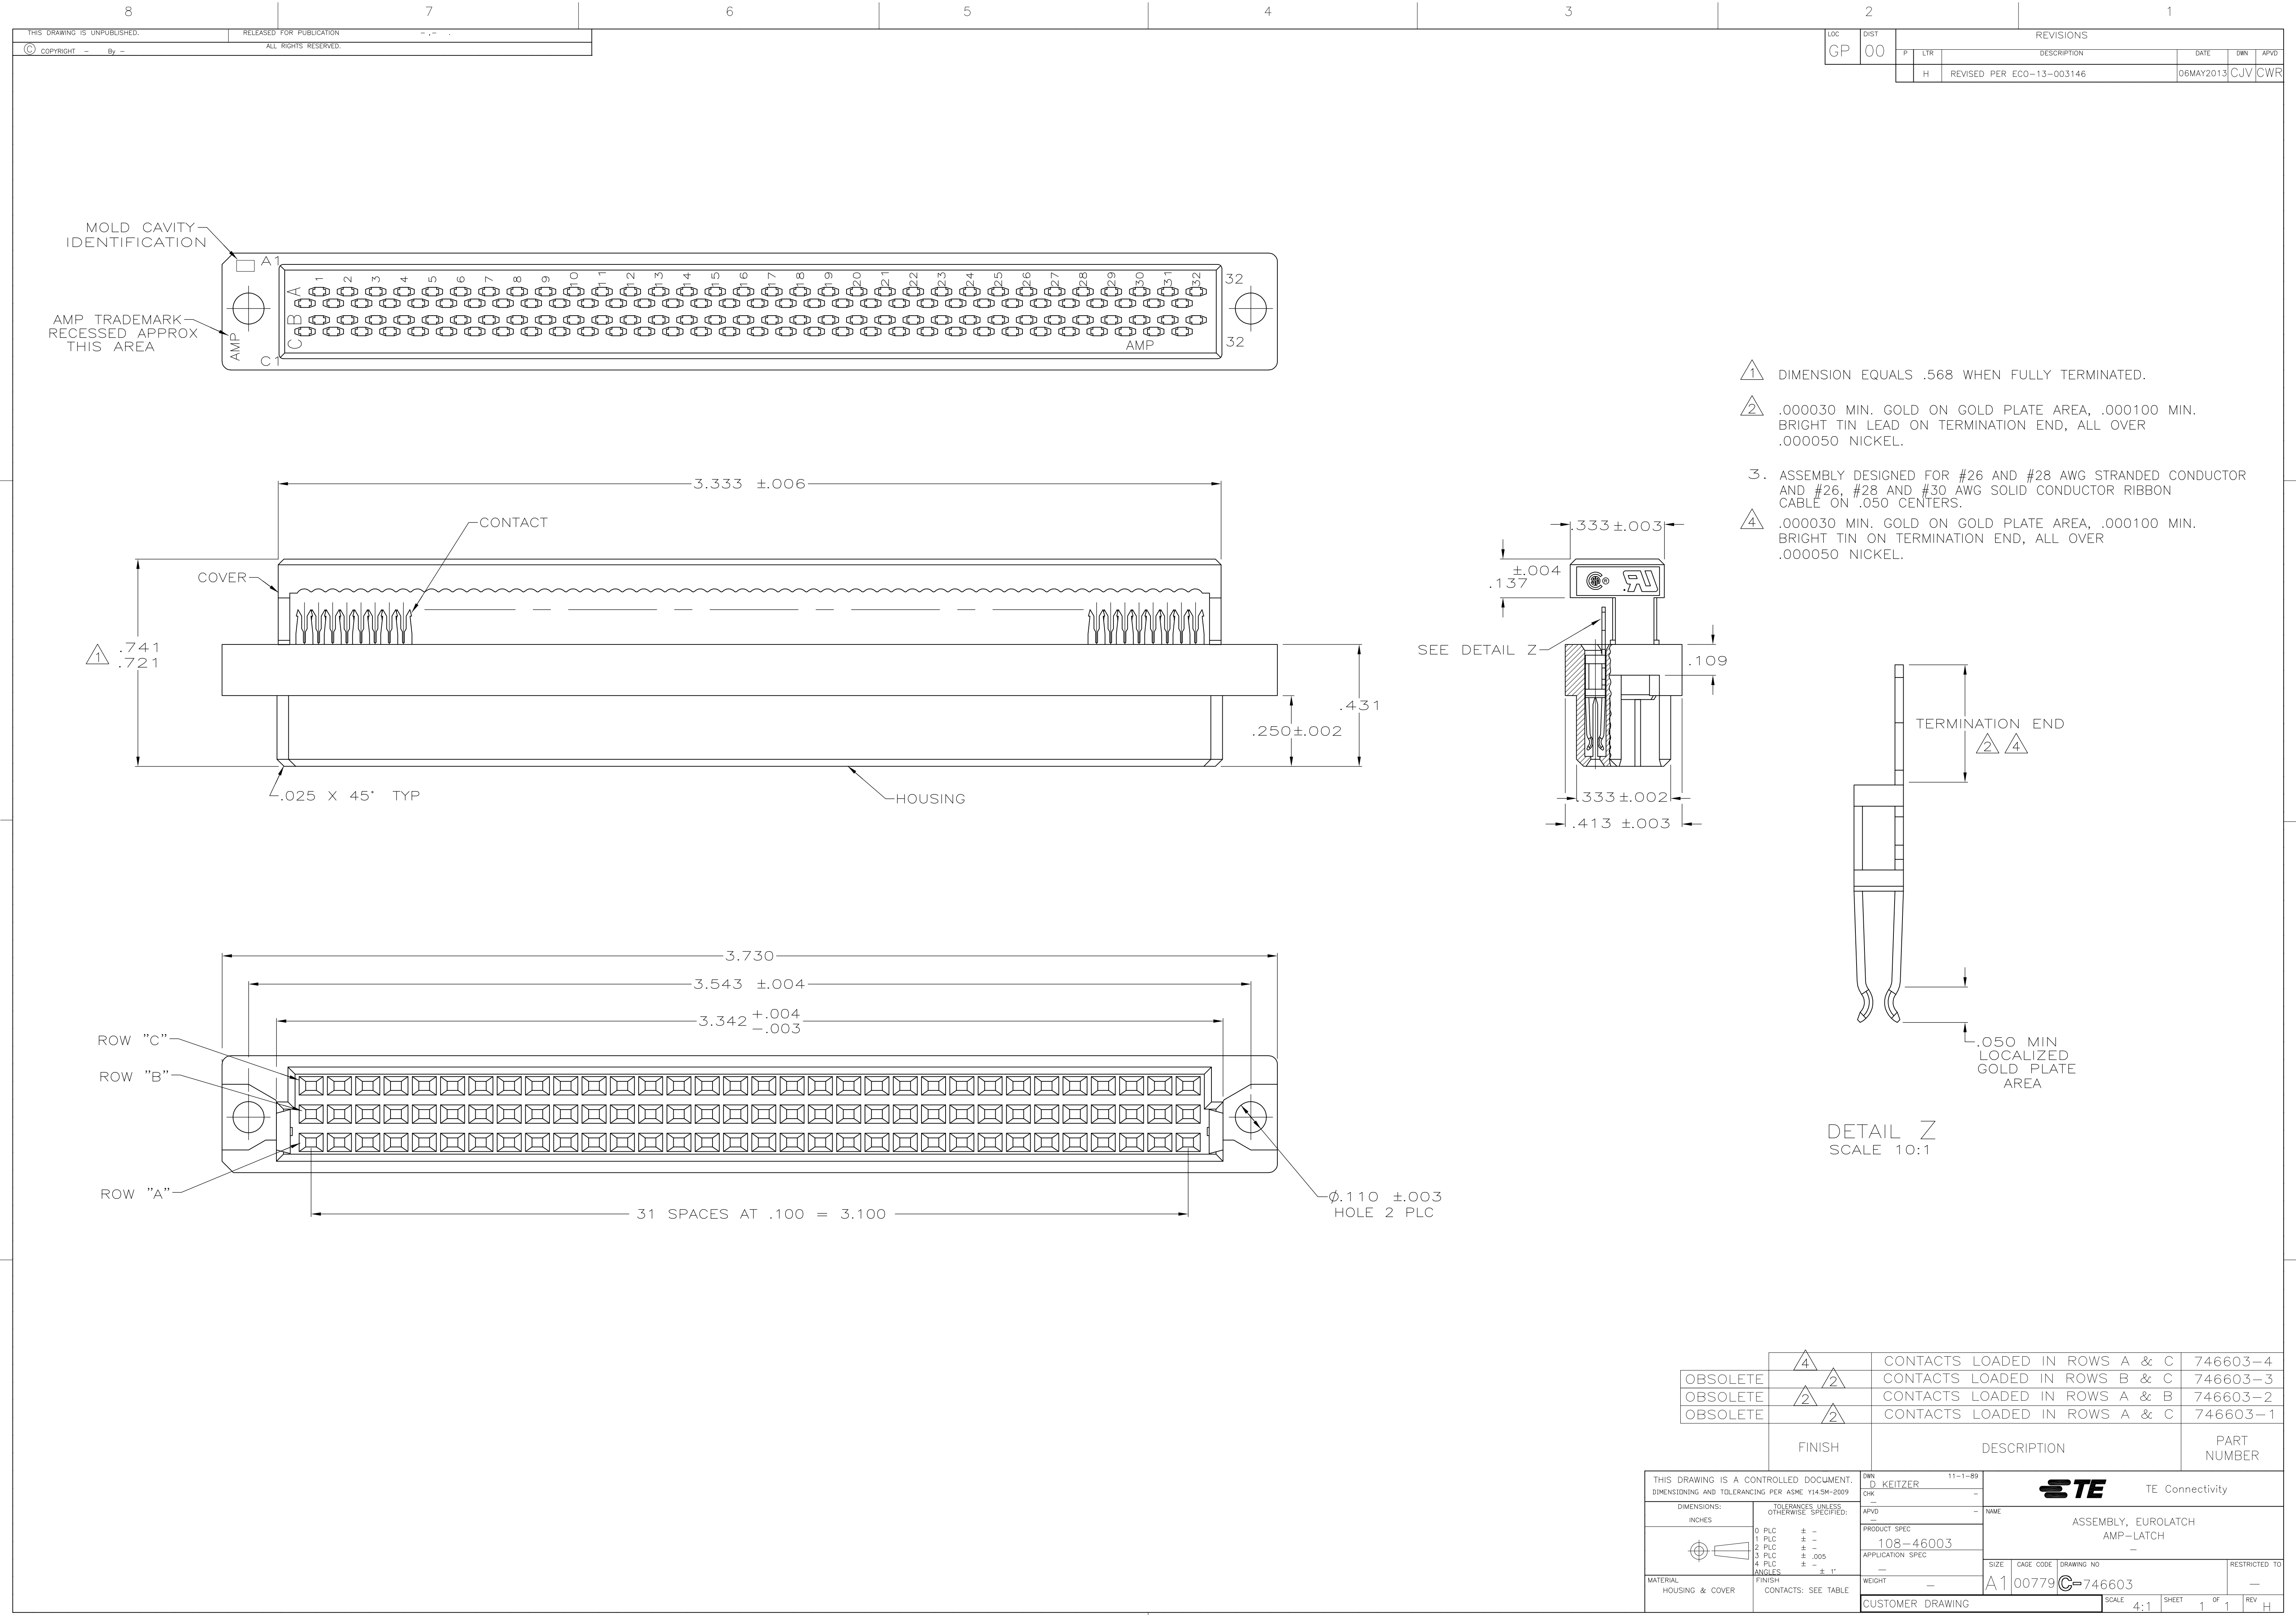

1. DIMENSION EQUALS .568 WHEN FULLY TERMINATED.
2. .000030 MIN. GOLD ON GOLD PLATE AREA, .000100 MIN. BRIGHT TIN LEAD ON TERMINATION END, ALL OVER .000050 NICKEL.
3. ASSEMBLY DESIGNED FOR #26 AND #28 AWG STRANDED CONDUCTOR AND #26, #28 AND #30 AWG SOLID CONDUCTOR RIBBON CABLE ON .050 CENTERS.
4. .000030 MIN. GOLD ON GOLD PLATE AREA, .000100 MIN. BRIGHT TIN ON TERMINATION END, ALL OVER .000050 NICKEL.

	4	CONTACTS LOADED IN ROWS A & C	746603-4
OBSOLETE	2	CONTACTS LOADED IN ROWS B & C	746603-3
OBSOLETE	2	CONTACTS LOADED IN ROWS A & B	746603-2
OBSOLETE	2	CONTACTS LOADED IN ROWS A & C	746603-1

FINISH		DESCRIPTION		PART NUMBER
D. KEITZER		TE Connectivity		
D. KEITZER		NAME		
D. KEITZER		PRODUCT SPEC		
D. KEITZER		APPLICATION SPEC		
D. KEITZER		SIZE		
D. KEITZER		CAGE CODE		
D. KEITZER		DRAWING NO		
D. KEITZER		RESTRICTED TO		
D. KEITZER		WEIGHT		
D. KEITZER		A1 00779		
D. KEITZER		CUSTOMER DRAWING		
D. KEITZER		SCALE		
D. KEITZER		SHEET		
D. KEITZER		1 OF 1		
D. KEITZER		REV		