


Precision Thin Film Nichrome Chip Resistor

PCF Series

- TCR to ± 5 ppm/ $^{\circ}\text{C}$
- Tolerances to $\pm 0.05\%$
- Available in 8 standard sizes
- Wide ohmic range 10Ω to $2.0\text{M}\Omega$
- RoHS compliant Pb-free terminations

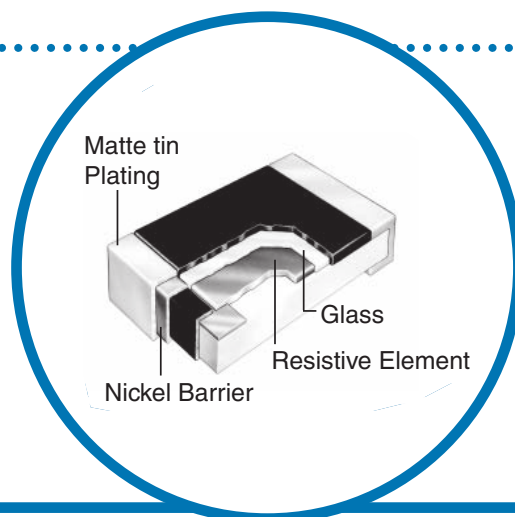

Electrical Data

Size	Ohmic Range (Ω)	Resistance Tolerance	TCR (ppm/ $^{\circ}\text{C}$)	Rated Power at 70°C (mW)	Max Working Voltage (volts)	Max Overload Voltage (volts)
0201	50 - 5K	$\pm 0.5\%, \pm 1\%$	± 25	50	15	30
	50 - 33K	$\pm 0.5\%, \pm 1\%$	± 50			
0402	50 - 2K	$\pm 0.01\%, \pm 0.05\%, \pm 0.1\%, \pm 0.25\%, \pm 0.5\%$	± 5	62.5	25	50
	50 - 12K	$\pm 0.01\%, \pm 0.05\%, \pm 0.1\%, \pm 0.25\%, \pm 0.5\%$	$\pm 10, \pm 15, \pm 25, \pm 50$			
	10 - 200K	$\pm 0.1\%, \pm 0.25\%, \pm 0.5\%, \pm 1\%$	$\pm 25, \pm 50$			
0603	50 - 8K	$\pm 0.01\%, \pm 0.05\%, \pm 0.1\%, \pm 0.25\%, \pm 0.5\%$	± 5	62.5	50	100
	25 - 100K	$\pm 0.01\%, \pm 0.05\%, \pm 0.1\%, \pm 0.25\%, \pm 0.5\%$	$\pm 10, \pm 15, \pm 25, \pm 50$			
	4.7 - 150K	$\pm 0.05\%$	$\pm 25, \pm 50$			
	4.7 - 800K	$\pm 0.1\%, \pm 0.25\%, \pm 0.5\%, \pm 1\%$	$\pm 25, \pm 50$			
	2 - 4.6	$\pm 0.25\%, \pm 0.5\%, \pm 1\%$	$\pm 25, \pm 50$			
0805	50 - 16K	$\pm 0.01\%, \pm 0.05\%, \pm 0.1\%, \pm 0.25\%, \pm 0.5\%$	± 5	100	100	200
	25 - 200K	$\pm 0.01\%, \pm 0.05\%, \pm 0.1\%, \pm 0.25\%, \pm 0.5\%$	$\pm 10, \pm 15, \pm 25, \pm 50$			
	4.7 - 500K	$\pm 0.05\%$	$\pm 25, \pm 50$			
	4.7 - 2M	$\pm 0.1\%, \pm 0.25\%, \pm 0.5\%, \pm 1\%$	$\pm 25, \pm 50$			
	1 - 4.6	$\pm 0.25\%, \pm 0.5\%, \pm 1\%$	$\pm 25, \pm 50$			
1206	50 - 30K	$\pm 0.01\%, \pm 0.05\%, \pm 0.1\%, \pm 0.25\%, \pm 0.5\%$	± 5	125	150	300
	25 - 500K	$\pm 0.01\%, \pm 0.05\%, \pm 0.1\%, \pm 0.25\%, \pm 0.5\%$	$\pm 10, \pm 15, \pm 25, \pm 50$			
	4.7 - 1M	$\pm 0.05\%, \pm 0.1\%, \pm 0.25\%, \pm 0.5\%, \pm 1\%$	$\pm 25, \pm 50$			
	1 - 4.6	$\pm 0.25\%, \pm 0.5\%, \pm 1\%$	$\pm 25, \pm 50$			
	1M - 2M	$\pm 0.25\%, \pm 0.5\%, \pm 1\%$	$\pm 25, \pm 50$			
1210	100 - 330K	$\pm 0.1\%, \pm 0.5\%$	$\pm 5, \pm 10$	250	200	400
	51R0 - 2.0M	$\pm 0.1\%, \pm 0.5\%$	± 25			
2010	50 - 30K	$\pm 0.01\%, \pm 0.05\%, \pm 0.1\%, \pm 0.25\%, \pm 0.5\%$	± 5	250	150	300
	25 - 500K	$\pm 0.01\%, \pm 0.05\%, \pm 0.1\%, \pm 0.25\%, \pm 0.5\%$	$\pm 10, \pm 15, \pm 25, \pm 50$			
	4.7 - 1M	$\pm 0.05\%, \pm 0.1\%, \pm 0.25\%, \pm 0.5\%, \pm 1\%$	$\pm 25, \pm 50$			
	1 - 4.6	$\pm 0.25\%, \pm 0.5\%, \pm 1\%$	$\pm 25, \pm 50$			
	1M - 2M	$\pm 0.25\%, \pm 0.5\%, \pm 1\%$	$\pm 25, \pm 50$			
2512	50 - 50K	$\pm 0.01\%, \pm 0.05\%, \pm 0.1\%, \pm 0.25\%, \pm 0.5\%$	± 5	500	150	300
	25 - 500K	$\pm 0.01\%, \pm 0.05\%, \pm 0.1\%, \pm 0.25\%, \pm 0.5\%$	$\pm 10, \pm 15, \pm 25, \pm 50$			
	4.7 - 1M	$\pm 0.05\%, \pm 0.1\%, \pm 0.25\%, \pm 0.5\%, \pm 1\%$	$\pm 25, \pm 50$			
	1 - 4.6, 1M - 2M	$\pm 0.25\%, \pm 0.5\%, \pm 1\%$	$\pm 25, \pm 50$			


General Note

TT electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT electronics' own data and is considered accurate at time of going to print.

Environmental Data

Test Conditions		Test Method	Performance	
			Tolerance $\leq 0.05\%$	Tolerance $> 0.05\%$
Short-time Overload		JIS-C-5202-5.5 5 Seconds at 2.5 X Rated Voltage (not to exceed 2 X Max Voltage)	$\pm 0.05\%$ (+0.05 Ω)	$\pm 0.5\%$ (+0.05 Ω)
Thermal Shock		MIL-STD-202 Method 107 100 Cycles -55°C to 150°C	$\pm 0.05\%$ (+0.05 Ω)	$\pm 0.25\%$ (+0.05 Ω)
Humidity (Steady State)		MIL-STD-202 Method 103 1000 Hours 40°C 90-95% RH 1.5 Hours On / 0.5 Hours Off Rated Voltage	$\pm 0.05\%$ (+0.05 Ω)	$\pm 0.3\%$ (+0.05 Ω)
Load Life	$R \leq 7.0K\Omega$	MIL-STD-202 Method 108 1000 Hours 70°C 1.5 Hours On / 0.5 Hours Off Rated Voltage, Rated Power	$\pm 0.05\%$ (+0.05 Ω)	$\pm 0.2\%$ (+0.05 Ω)
	$R > 7.0K\Omega$		$\pm 0.5\%$ (+0.05 Ω)	$\pm 0.5\%$ (+0.05 Ω)
High Temperature Exposure		JIS-C-5202-7.2 96 Hours 155°C	$\pm 0.05\%$ (+0.05 Ω)	$\pm 0.2\%$ (+0.05 Ω)
Low Temperature Operation		JIS-C-5202-7.2 96 Hours 155°C	$\pm 0.05\%$ (+0.05 Ω)	$\pm 0.2\%$ (+0.05 Ω)
Resistance to Solder Heat		MIL-STD-202 Method 210 10 \pm 1 Seconds 260°C	$\pm 0.05\%$ (+0.05 Ω)	$\pm 0.2\%$ (+0.05 Ω)
Solderability		MIL-STD-202 Method 208 3 \pm 0.5 Seconds 235°C	95% Min Coverage	

Power Derating Curve

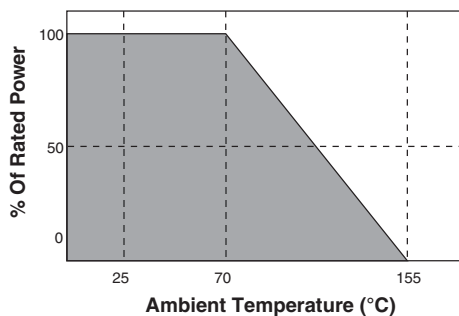

Packaging Data

Chip Size	Tape Type	Reel Quantity
0201	Paper	5,000
0402	Paper	10,000
0603	Paper	5,000
0805	Paper	5,000
1206	Paper	5,000
1210	Paper or Plastic	5,000
2010	Plastic	4,000
2512	Plastic	4,000

General Note

TT electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT electronics' own data and is considered accurate at time of going to print.

Physical Data

Dimensions (inches)					
Model	L	W	H	a	b
PCF0201LF	0.024±0.002	0.012±0.002	0.009±0.002	0.005±0.002	0.005±0.002
PCF0402LF	0.039±0.002	0.020±0.002	0.012±0.002	0.008±0.004	0.008±0.004
PCF0603LF	0.061±0.004	0.031±0.004	0.018±0.004	0.012±0.008	0.012±0.008
PCF0805LF	0.079±0.007	0.049±0.007	0.021±0.004	0.012±0.008	0.016±0.010
PCF1206LF	0.120±0.007	0.061±0.007	0.021±0.004	0.016±0.008	0.014±0.010
PCF1210LF	0.126±0.008	0.102±0.008	0.018±0.002	0.020±0.008	0.018±0.008
PCF2010LF	0.193±0.007	0.094±0.007	0.021±0.004	0.023±0.005	0.020±0.010
PCF2512LF	0.248±0.007	0.122±0.007	0.021±0.004	0.023±0.005	0.020±0.010

Ordering Data

Prefix	PCF	-	W1206LF	-	03	-	1001	-	B	-	P	-	LT
Model	W0201LF, W0402LF, W0603LF, W0805LF, W1206LF, W1210LF, W2010LF, W2512LF Note: LF = 100% matte tin, Pb-free terminations												
TCR Characteristic	01=±100ppm/°C, 02=±50ppm/°C, 03=±25ppm/°C, 12=±10ppm/°C 13=±5ppm/°C												
Resistance Code	Standard 4-digit resistance code. Examples: 1004=1.0MΩ, 1003=100KΩ, 51R0=51Ω												
Tolerance Code	F= ±1%, D=±0.5%, C=±0.25%, B=±0.1%, A=±0.05%, T=±0.01%												
Tape Type	P=Paper, E=Plastic												
Tape & Reel Packaging													

For additional information or to discuss your specific requirements, please contact our Applications Team using the contact details below.

General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.