

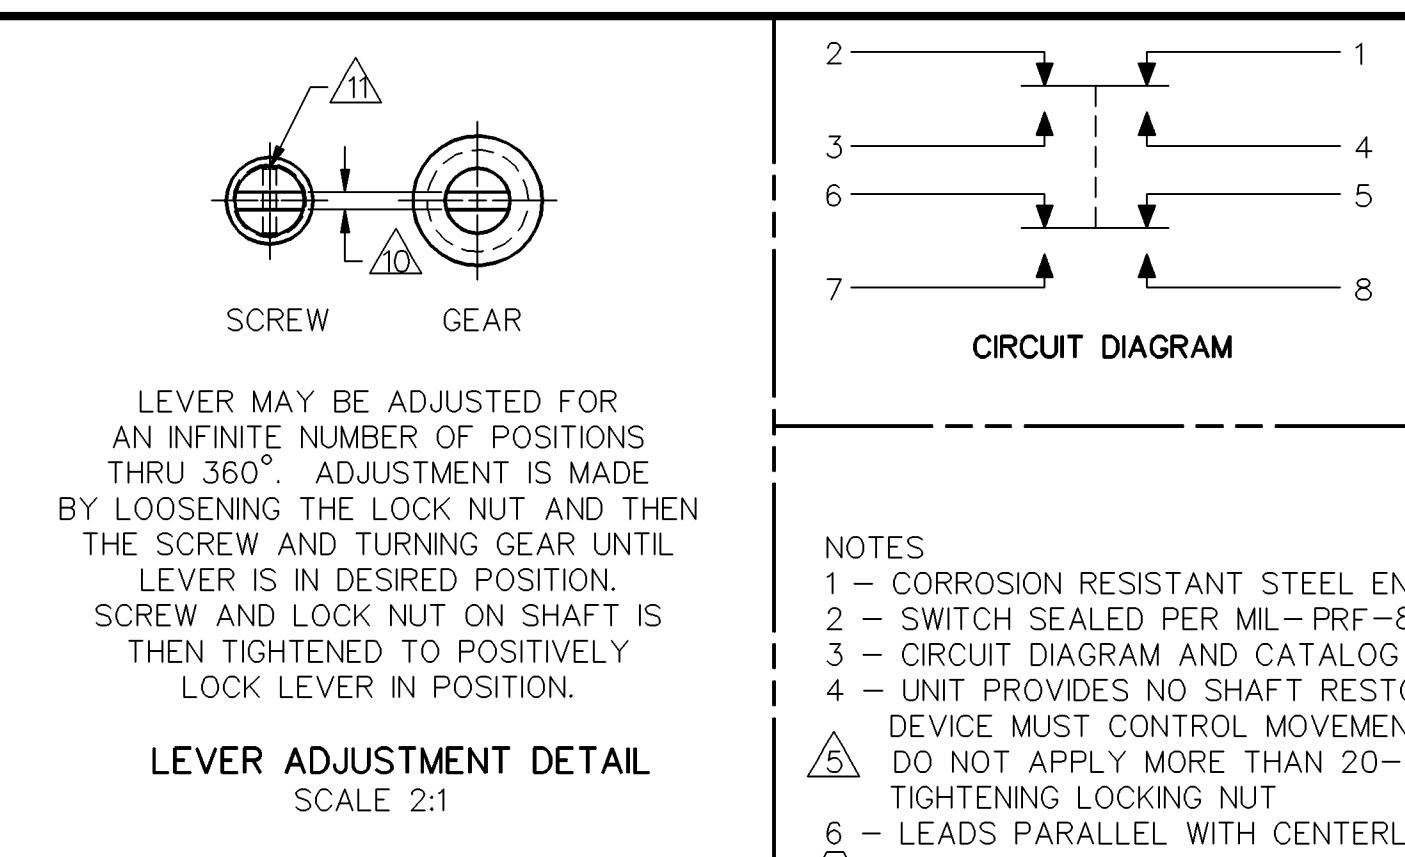
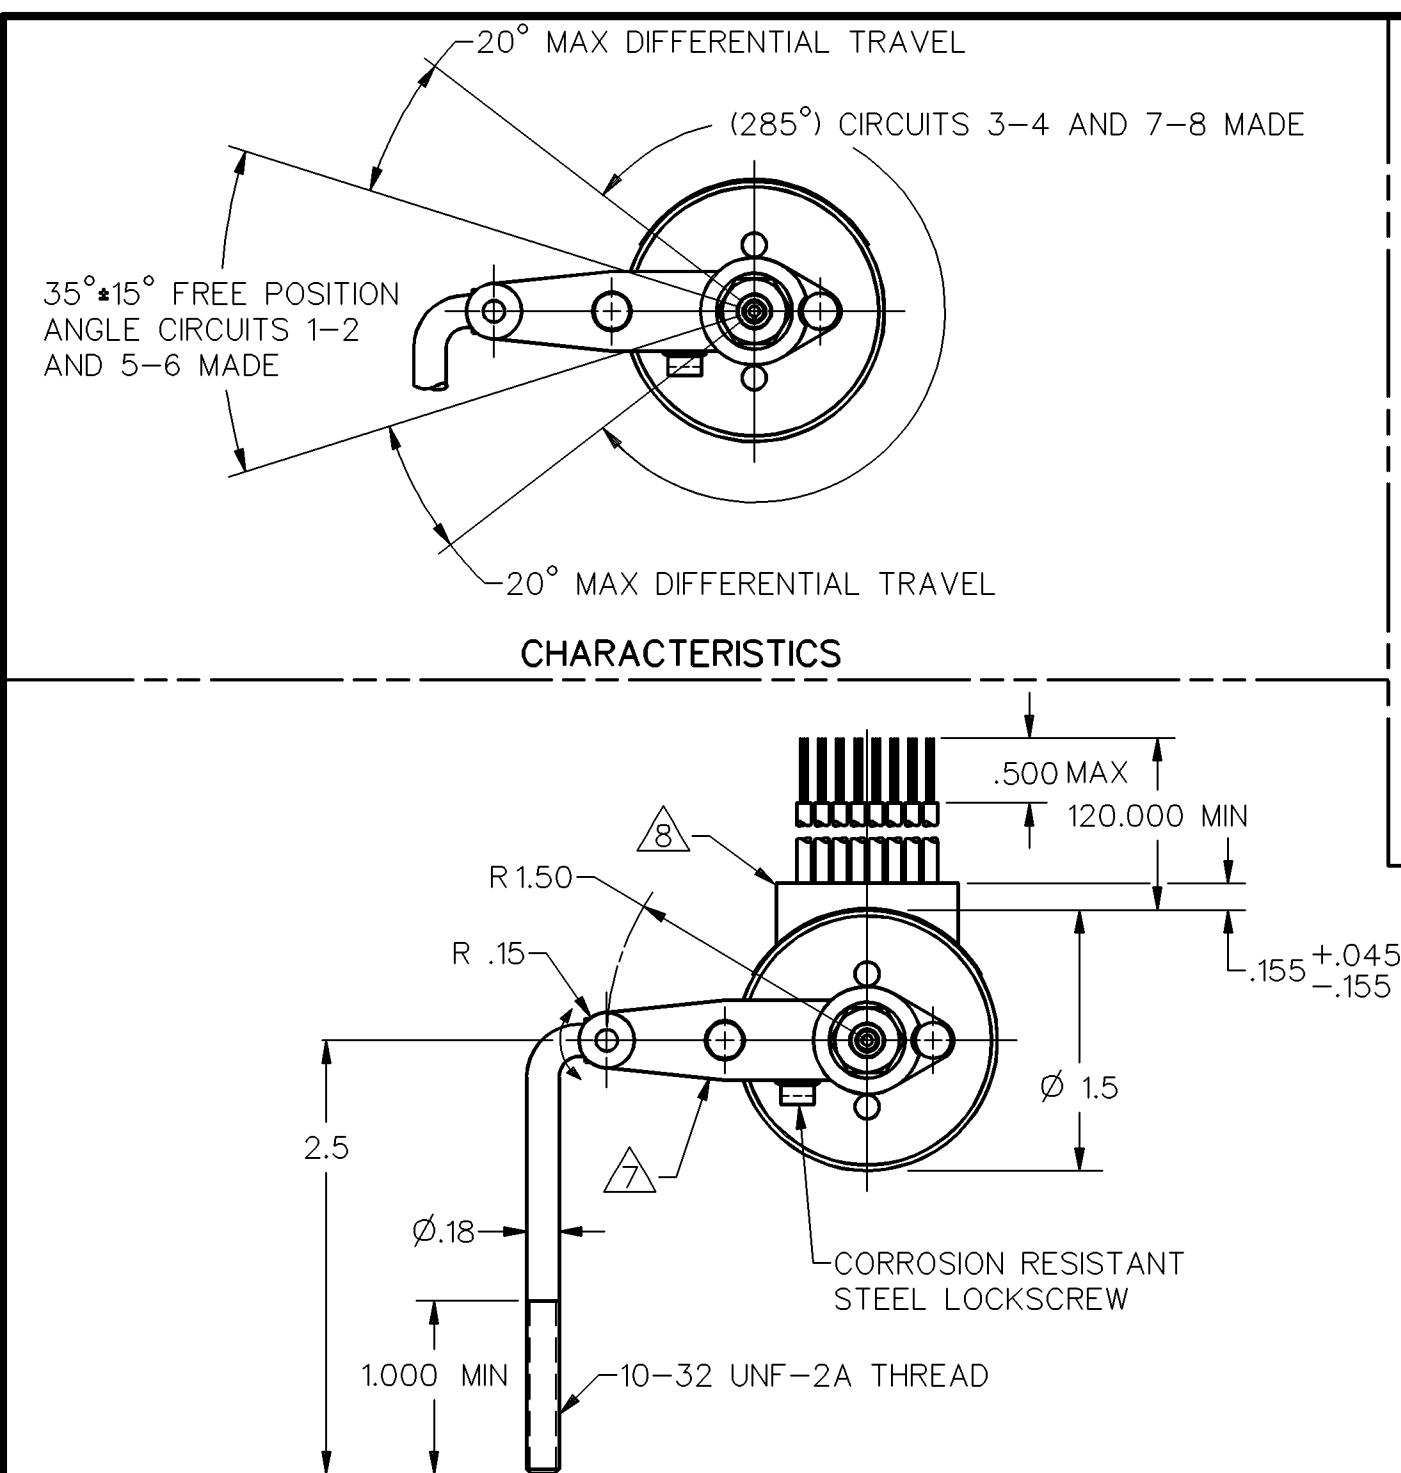


44EN14-10  
M  
ISSUE 17 DRAWING NUMBER  
REVISIONS  
A 156587  
T S M  
5 NOV 93  
B CO-  
78255  
M  
1 SEP 94  
C 0008133  
RSP  
28 SEP 04  
DRAWN  
T S M  
15 NOV 93  
CHECK  
28 SEP 04  
AK  
RELEASER NO. SR-10935  
REPLACES

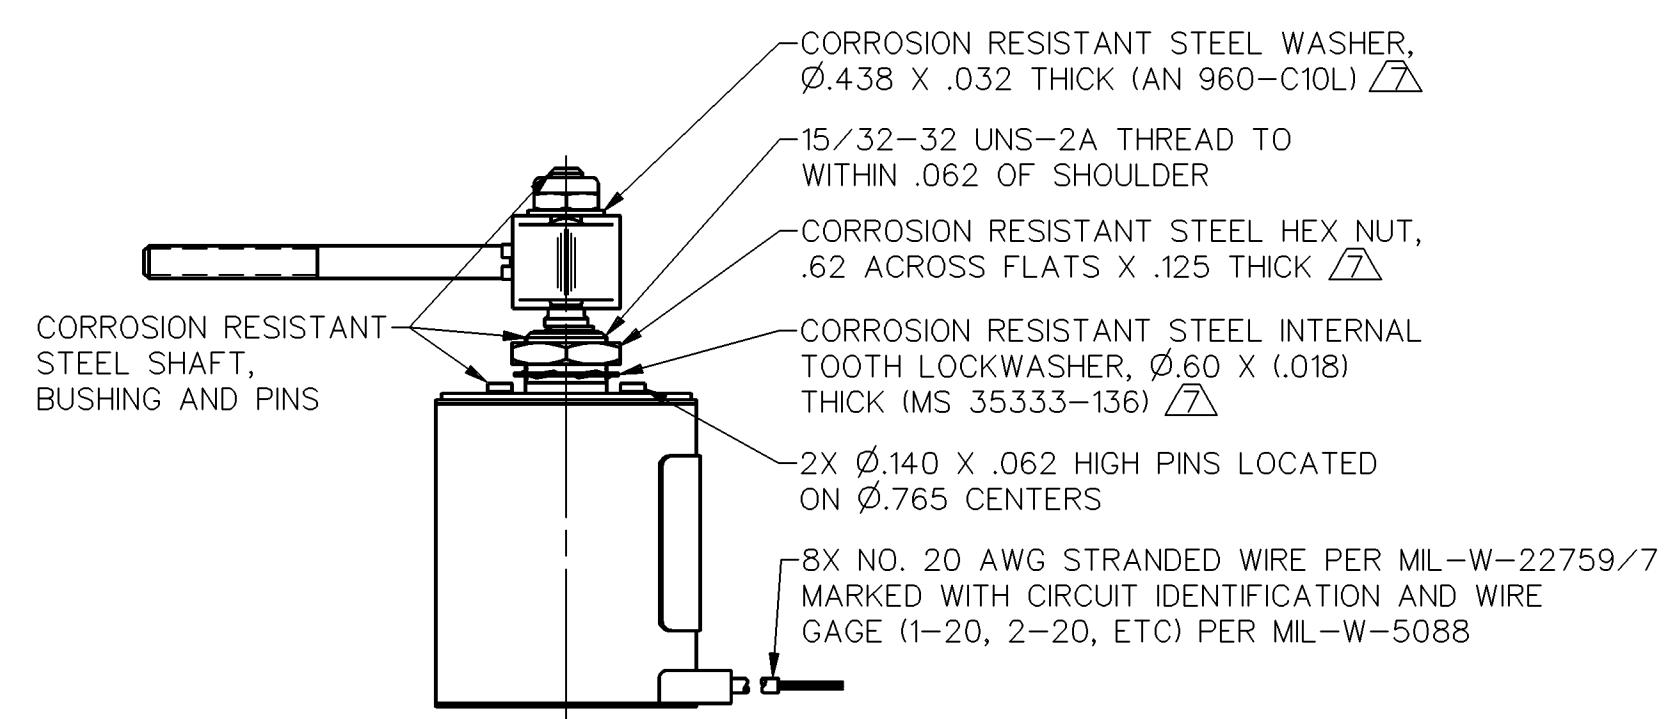

**M** 44EN14-10

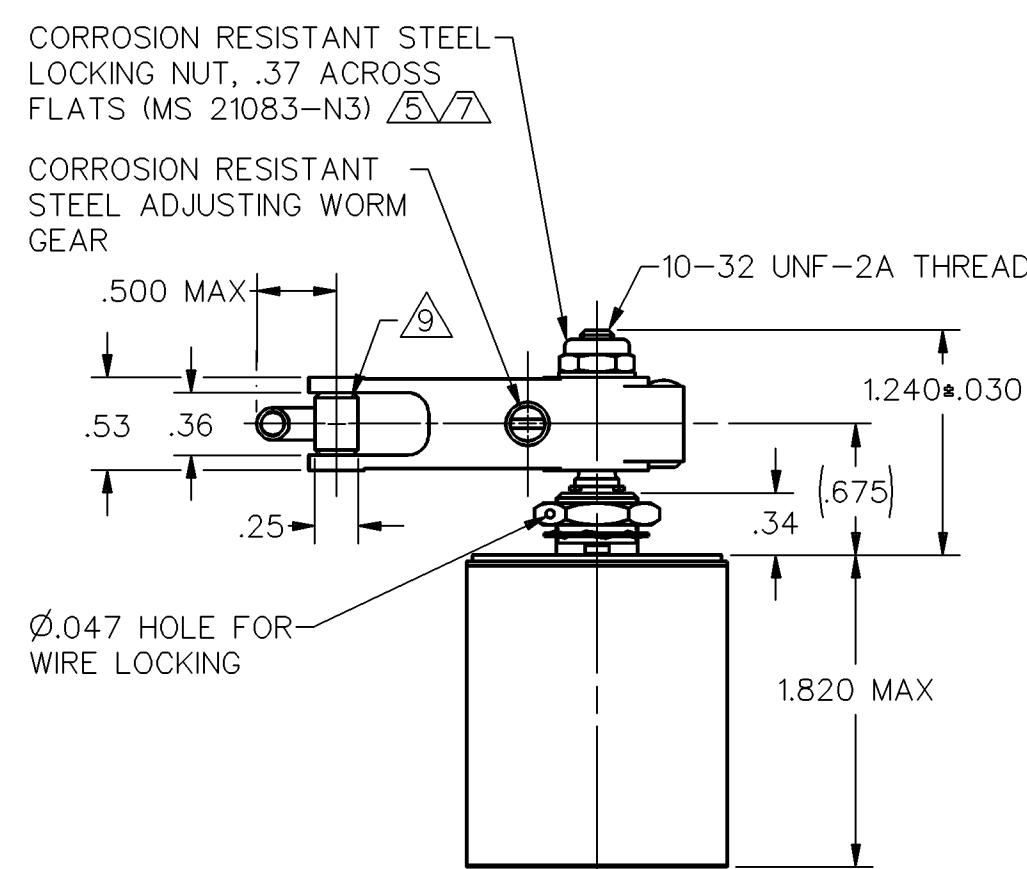

CHARACTERISTICS		ELECTRICAL DATA	
OPERATING TORQUE --- 10 IN-LB MAX		CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	
PRETRAVEL		LOAD 28 VDC	
DIFFERENTIAL TRAVEL		SEA LEVEL 50,000 FT	
OVERTRAVEL		RES 15 15	
FREE POSITION		IND 10 10	
SEE DETAIL		MOTOR 5	
		LAMP 3 3	

MASTER REDUCED  
ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.  
**MICRO SWITCH**  
a Honeywell Division  
FED. MFG. CODE 91929

SWITCH-ENCLOSED

44EN14-10

THIRD ANGLE PROJECTION
SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
ONE PLACE (.0) ±.030
TWO PLACES (.00) ±.015
THREE PLACES (.000) ±.005
ANGLES ±
WEIGHT 16.5 OZ MAX

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[44EN14-10](#)