


PRODUCT NUMBER	DIM "A"
93175-001	.775 [19.69]
93175-002	.858 [21.81]
93175-003	.790 [20.07]
93175-001LF	.775 [19.69]
93175-002LF	.858 [21.81]
93175-003LF	.790 [20.07]

NOTE 3

NOTE 3

NOTE 3

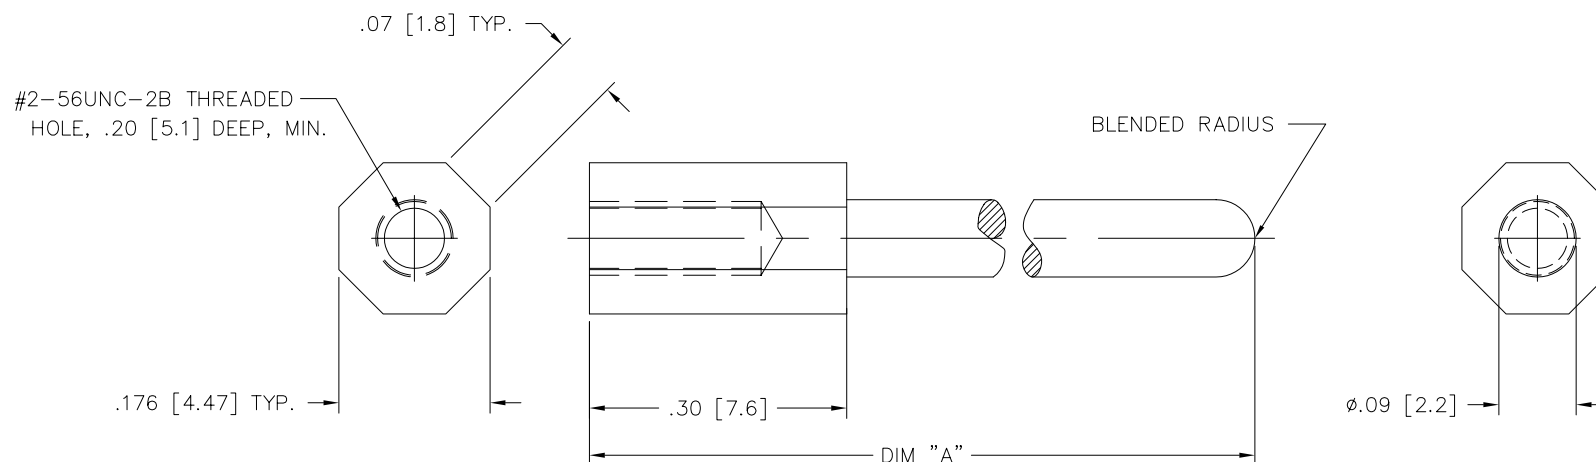

NOTES:

1. MATERIAL: AISI 416 STAINLESS STEEL.
2. SEE SHEETS 2 & 3 FOR APPLICATION.
3. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

mat'l. code				surface ISO 1302	tolerance ISO 406 ISO 1101	projection INCH/MM	product family HPC
ltr	ecn no	dr	date	tolerances unless otherwise specified			title
B	V31951	GIP	11/11/93	angles	.XX±.01/.3		GUIDE PIN
C	V40690	RMP	3/29/94	linear	.XXX±.005/.13		END MOUNT
D	V50147	GIP	1/11/95	0'±2'	.XXXX±.0020/.051	scale 1:1	
E	V51482	GIP	12/5/95	dr	D. HORCHLER	7/8/05	dwg no
F	V00721	LSS	4/12/00	enrg	D. HORCHLER	7/8/05	sheet 1 of 3 size
G	V05-0643	DCH	7/8/05	chr	T. BREWBAKER	7/8/05	93175
H	M06-0265	AGS	7/11/06	app	D. HORCHLER	7/8/05	A3
sheet	revision	H	H	H			type
index	sheet	1	2	3			Product Customer Drawing


form: A3




FCIconnect.com

Copyright FCI


PRODUCT NUMBER
SEE SHT 1

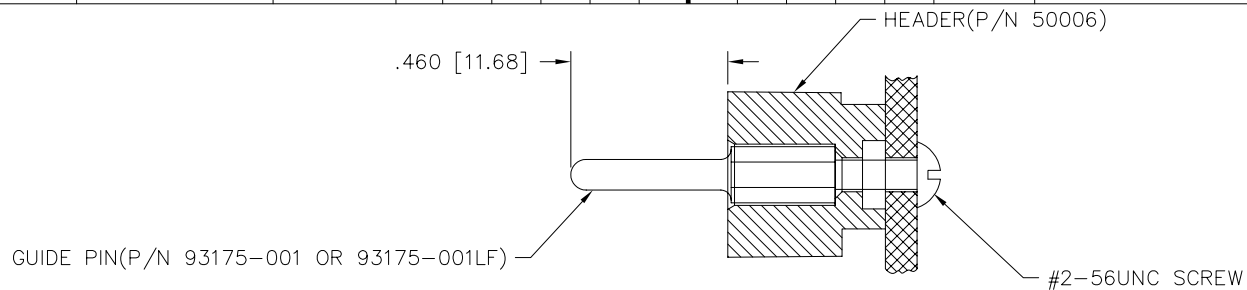

GUIDE PIN, END MOUNTED

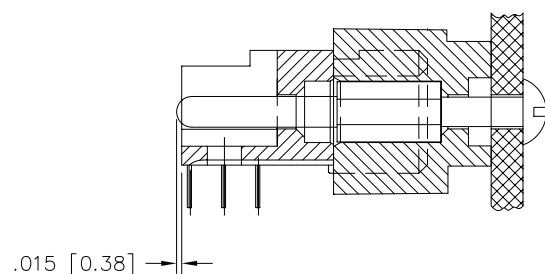

HOUSING FULLY SEATED

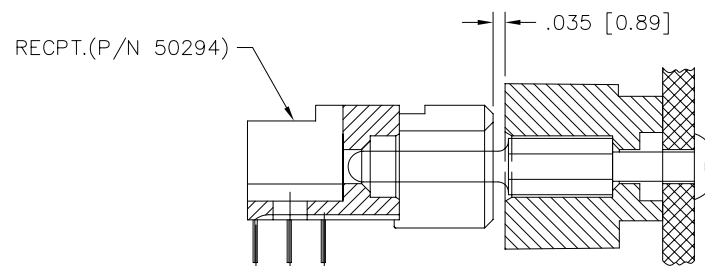

GUIDE PIN FIRST CONTACT

END MOUNTED GUIDE PIN IN HEADER
(MECHANICAL)

NOTES:

1. P/N 93175-001 OR, 93175-001LF TO BE USED IN MECHANICAL APPLICATIONS ONLY, IT CAN BE MOUNTED IN RECPT. OR HEADERS, DESIGNED TO MAKE FIRST CONTACT WHEN HOUSING FACES ARE .035" APART.

mat'l. code				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection INCH/MM	product family HPC
ltr	ecn	no	dr	date	tolerances unless otherwise specified	scale 1:1 FCI	title GUIDE PIN END MOUNT
H					angles linear .XX±.01/.3 0°±2' .XXX±.005/.13 .XXXX±.0020/.051		
					dr D. HORCHLER 7/8/05		dwg no sheet 3 of 3 size
					enr D. HORCHLER 7/8/05		93175 A3
					chr T. BREWBAKER 7/8/05	type Product Customer Drawing	
					app D. HORCHLER 7/8/05		
sheet index	revision sheet						

form: A3




FCIconnect.com


Copyright FCI

form: A3


PRODUCT NUMBER
SEE SHT 1

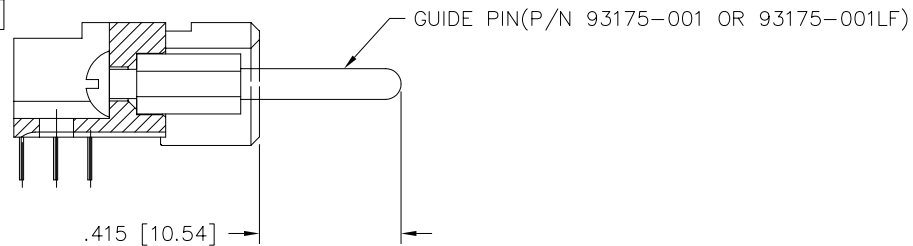

GUIDE PIN, END MOUNTED

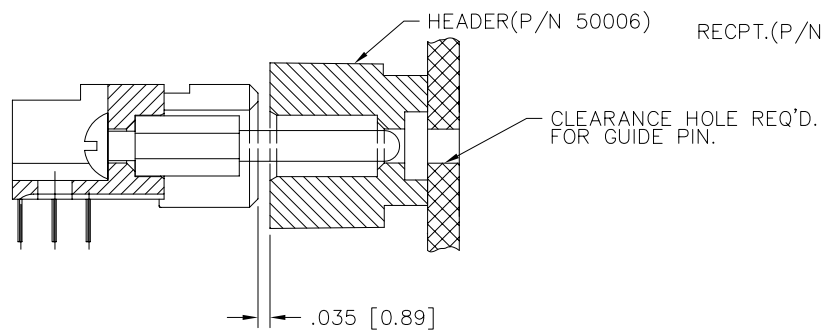

GUIDE PIN FIRST CONTACT

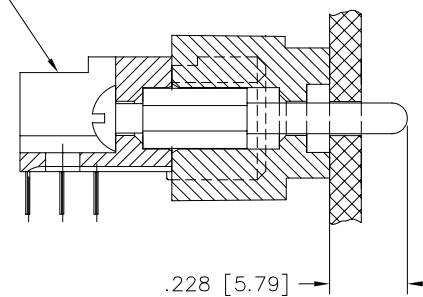

HOUSING FULLY SEATED

END MOUNTED GUIDE PIN IN RECEPTACLE
(MECHANICAL)

NOTES:

1. P/N 93175-001 OR 93175-001LF TO BE USED IN MECHANICAL APPLICATIONS ONLY, IT CAN BE MOUNTED IN RECPT, OR HEADERS, DESIGNED TO MAKE FIRST CONTACT WHEN HOUSING FACES ARE .035" APART.

mat'l. code				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection INCH/MM	product family HPC
ltr	ecr	no	dr	date	tolerances unless otherwise specified	scale 1:1	title
H					angles linear		GUIDE PIN END MOUNT
					.XX±.01/.3		
					.XXX±.005/.13		
					.XXXX±.0020/.051		
			dr	D. HORCHLER	7/8/05		dwg no
			enr	D. HORCHLER	7/8/05		93175
			chr	T. BREWBAKER	7/8/05		sheet 2 of 3
			app	D. HORCHLER	7/8/05		A3
sheet index	revision sheet						type Product Customer Drawing