


features

- Surface mount
- Operating temperature: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- Flat top suitable for high speed pick-and-place components
- Excellent high frequency applications
- High Q factors and self-resonant frequency values
- Marking: White body color with no marking (0402)
Black body color with white marking (0603, 0805, 1008)
- Products with lead-free terminations meet EU RoHS requirements
- AEC-Q200 Qualified

dimensions and construction

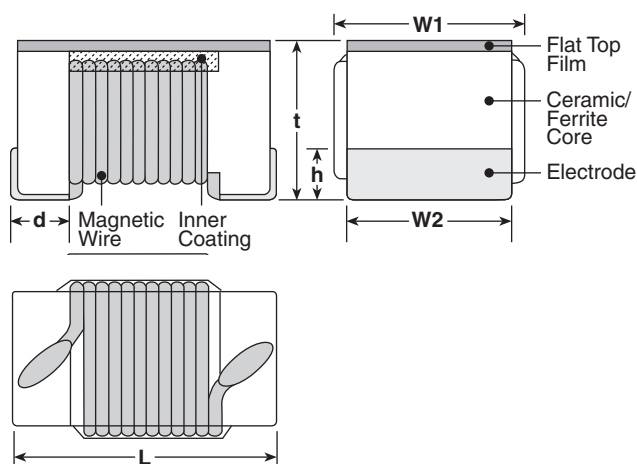

Size Code	Dimensions inches (mm)					
	L	W1	W2	t	h	d
KQT0402	.039±.004 (1.0±0.1)	.02±.004 (0.5±0.1)	.02±.004 (0.5±0.1)	.022±.004 (0.55±0.1)	.006±.004 (0.15±0.1)	.01±.004 (0.25±0.1)
KQ0603	.063±.004 (1.6±0.1)	.039±.004 (1.0±0.1)	.033±.004 (0.85±0.1)	.035±.004 (0.9±0.1)	.01±.006 (0.25±0.15)	.014±.004 (0.35±0.1)
KQ0805	.079±.008 (2.0±0.2)	.059±.008 (1.5±0.2) (3.3nH-390nH)	.053±.004 (1.35±0.1)	.051±.008 (1.3±0.2)	.016±.006 (0.40±0.15)	.018±.004 (0.45±0.1)
		.063±.008 (1.6±0.2) (470nH-820nH)				
KQ1008	.098±.008 (2.5±0.2)	.087±.008 (2.2±0.2)	.079±.004 (2.0±0.1)	.071 ^{+.008} ₋₀ (1.8 ^{+.02} ₋₀)	.018±.006 (0.45±0.15)	.018±.004 (0.45±0.1)

ordering information

New Part #	KQ	1008	T	TE	10N	J
Type	KQ KQT	Size Code 0402 0603 0805 1008	Termination Material T: Sn	Packaging TP: 2mm pitch paper (0402: 10,000 pieces/reel) TD: 7" paper tape (0402: 2,000 pieces/reel) TE: 7" embossed plastic (0603, 0805, 1008: 2,000 pieces/reel)	Nominal Inductance 3 digits: 10N: 10nH R10: 0.1μH 1R0: 1.0μH	Tolerance B: ±0.1nH C: 0.2nH G: ±2% H: ±3% J: ±5% K: ±10% M: ±20%

For further information on packaging, please refer to Appendix A.

applications and ratings

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	
KQT0402T**1N0*	—	1.0	250	B: ±0.1nH C: ±0.2nH	16	250	11000	0.045	1360	
KQT0402T**1N9*		1.9					9600	0.070	1040	
KQT0402T**2N0*		2.0			19					
KQT0402T**2N2*		2.2			8000		0.068	960		
KQT0402T**2N4*		2.4					18	0.120	700	
KQT0402T**2N7*		2.7		H: ±3% J: ±5% K: ±10%	17		7200	0.066	840	
KQT0402T**3N3*		3.3			19		6000	0.091	800	
KQT0402T**3N6*		3.6								
KQT0402T**3N9*		3.9			18		5800	0.083	760	
KQT0402T**4N3*		4.3								
KQT0402T**4N7*		4.7			20		4800	0.086	680	
KQT0402T**5N1*		5.1					5800			
KQT0402T**5N6*		5.6			22		4400	0.104	650	
KQT0402T**6N2*		6.2					4200			
KQT0402T**6N8*		6.8			20		4160	0.104	680	
KQT0402T**7N5*		7.5					4000	0.150	650	
KQT0402T**8N2*		8.2			22		3900	0.195	480	
KQT0402T**8N7*		8.7					3680	0.120	640	
KQT0402T**9N0*		9.0			20		3600			
KQT0402T**9N5*		9.5					3450	0.180	560	
KQT0402T**10N*		10			24		3280	0.172		
KQT0402T**11N*		11					3100	0.200	500	
KQT0402T**12N*		12			25		3040	0.230		
KQT0402T**13N*		13					3000	0.250	450	
KQT0402T**15N*		15			24		2800	0.323		
KQT0402T**16N*		16					2720	0.214	400	
KQT0402T**18N*		18			25		2700	0.322		
KQT0402T**19N*		19					2480	0.298		
KQT0402T**20N*		20			24		2400	0.354		340
KQT0402T**22N*		22					2400	0.393		
KQT0402T**23N*		23			25		2320	0.560	320	
KQT0402T**24N*		24					2300	0.550		300
KQT0402T**27N*		27			24		2240	0.620	320	
KQT0402T**30N*		30					2200	0.810	300	
KQT0402T**33N*		33			20		2100	0.830	150	
KQT0402T**34N*		34					2100	0.835	240	
KQT0402T**36N*		36			25		2800	1.170	200	
KQT0402T**39N*		39					2000	1.120		
KQT0402T**40N*		40			22		1800	1.810	140	
KQT0402T**43N*		43					1600	2.090	130	
KQT0402T**47N*		47			25		1500	2.320	120	
KQT0402T**51N*		51								
KQT0402T**56N*		56								
KQT0402T**68N*		68								
KQT0402T**82N*		82								
KQT0402T**R10*		100								
KQT0402T**R12*		120								

* Add tolerance character (B, C, G, H, J, K, M)

** Add packaging code

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/16/11

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)
KQ0603TTE1N6*	C	1.6	250	J: ±5% K: ±10%	24	250	12500	0.03	700
KQ0603TTE1N8*	0	1.8			16			0.045	
KQ0603TTE3N3*	X	3.3			22		6900	0.055	
KQ0603TTE3N6*	E	3.6						0.063	
KQ0603TTE3N9*	1	3.9						0.08	
KQ0603TTE4N3*	F	4.3			5900		0.063		
KQ0603TTE4N7*	G	4.7					0.116		
KQ0603TTE5N1*	Y	5.1			5800		0.115		
KQ0603TTE6N8*	2	6.8					0.11		
KQ0603TTE7N5*	H	7.5			4800		0.106		
KQ0603TTE8N2*	A	8.2		0.12					
KQ0603TTE8N7*	J	8.7		4600	0.109				
KQ0603TTE9N5*	B	9.5			4800		0.125		
KQ0603TTE10N*	3	10		0.13					
KQ0603TTE11N*	K	11		33	4000		0.086		
KQ0603TTE12N*	4	12					0.13		
KQ0603TTE15N*	5	15		35	3300		0.17		
KQ0603TTE16N*	L	16					0.104		
KQ0603TTE18N*	6	18		34	3100		0.17		
KQ0603TTE22N*	7	22					0.19		
KQ0603TTE23N*	S	23	38	3000	0.15				
KQ0603TTE24N*	M	24			0.135				
KQ0603TTE27N*	8	27	40	2800	0.22				
KQ0603TTE30N*	N	30			0.144				
KQ0603TTE33N*	9	33	37	2250	0.22				
KQ0603TTE36N*	P	36			0.25				
KQ0603TTE39N*	0	39	40	2080	0.25				
KQ0603TTE43N*	Q	43				2300			
KQ0603TTE47N*	1	47	39	2000	0.28				
KQ0603TTE51N*	T	51				38	1900	0.30	
KQ0603TTE56N*	2	56	37	1700	0.31				
KQ0603TTE68N*	3	68			34	1400	0.34		
KQ0603TTE72N*	4	72	32	1350			0.49		
KQ0603TTE82N*	5	82			25	1300	0.54		
KQ0603TTER10*	6	100	150	1400			0.58		
KQ0603TTER11*	7	110			1300	2.2	140		
KQ0603TTER12*	8	120	1200	2.3				130	
KQ0603TTER15*	9	150			1000	2.4	120		
KQ0603TTER18*	0	180	900	2.3				170	
KQ0603TTER20*	U	200			840	3.17	110		
KQ0603TTER21*	V	210	800	3.0				100	
KQ0603TTER22*	1	220			700	3.7	80		
KQ0603TTER25*	W	250	640	1.21				190	
KQ0603TTER27*	2	270			610	1.26	170		
KQ0603TTER30*	X	300	560	2.09				130	
KQ0603TTER33*	3	330							
KQ0603TTER39*	4	390							
KQ0603TTER47*	5	470							
KQ0603TTER51*	V	510							
KQ0603TTER56*	6	560							

* Add tolerance character (B, C, G, H, J, K, M)

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/31/10

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)		
KQ0603TTER62*	W	620	50	J: ±5% K: ±10%	30	50	590	1.89	150		
KQ0603TTER68*	7	680					540	1.97	140		
KQ0603TTER75*	X	750					530	2.04	130		
KQ0603TTER82*	8	820					490	3.09	110		
KQ0603TTER91*	Y	910					480	2.95	120		
KQ0603TTE1R0*	9	1000					440	5.13	90		
KQ0603TTE1R2*	0	1200					400	5.45	80		
KQ0805TTE3N3*	0	3.3					250	G: ±2% J: ±5% K: ±10%	50	1500	6000
KQ0805TTE6N8*	1	6.8	1000	5500	0.11						
KQ0805TTE8N2*	2	8.2	4700	0.12							
KQ0805TTE12N*	3	12	4000	0.15							
KQ0805TTE15N*	4	15	3400	0.17							
KQ0805TTE18N*	5	18	3300	0.20							
KQ0805TTE20N*	Y	20	55	500	2600	0.22			500		
KQ0805TTE22N*	6	22			2500	0.25					
KQ0805TTE27N*	7	27			2050	0.27					
KQ0805TTE33N*	8	33			2000	0.29					
KQ0805TTE39N*	9	39	60		1650	0.34					
KQ0805TTE43N*	4	43			1550	0.34					
KQ0805TTE47N*	0	47			1450	0.38					
KQ0805TTE56N*	1	56			1300	0.42					
KQ0805TTE68N*	2	68	65	250	1200	0.46			400		
KQ0805TTE82N*	3	82			1100	0.51					
KQ0805TTER10*	4	100			920	0.56					
KQ0805TTER12*	5	120			870	0.64					
KQ0805TTER15*	6	150	50		850	0.70					
KQ0805TTER16*	H	160			48	650	1.0	350			
KQ0805TTER17*	J	170				600	1.4		310		
KQ0805TTER18*	7	180				560	1.5		290		
KQ0805TTER19*	D	190	375	1.76		250					
KQ0805TTER20*	E	200	25	J: ±5% K: ±10%	33	100	340	1.9	230		
KQ0805TTER21*	F	210					23	50	188	2.2	190
KQ0805TTER22*	8	220							215	2.35	180
KQ0805TTER23*	K	230							50	J: ±5% K: ±10% M: ±20%	50
KQ0805TTER24*	L	240	3300	0.09							
KQ0805TTER25*	G	250	3000	0.10							
KQ0805TTER27*	9	270	2500	0.11							
KQ0805TTER33*	0	330	55	350	2400	0.12					
KQ0805TTER39*	1	390			1600	0.13					
KQ1008TTE10N*	10N	10			1600	0.14					
KQ1008TTE12N*	12N	12			1500	0.15					
KQ1008TTE15N*	15N	15	60								
KQ1008TTE18N*	18N	18									
KQ1008TTE22N*	22N	22									
KQ1008TTE27N*	27N	27									
KQ1008TTE33N*	33N	33	65								
KQ1008TTE39N*	39N	39									
KQ1008TTE47N*	47N	47									

* Add tolerance character (C, G, H, J, K, M) For complete environmental specifications, please refer to www.koaspeer.com
Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

12/31/10

applications and ratings (continued)

Part Designation	Marking	Nominal Inductance (nH)	L Measuring Frequency	Inductance Tolerance	Q Quality Factor Minimum	Q Measuring Frequency (MHz)	Self Resonant Frequency Minimum (MHz)	DC Resistance Maximum (Ω)	Allowable DC Current Maximum (mA)	
KQ1008TTE56N*	56N	56	50	G: ±2% J: ±5% K: ±10%	65	350	1300	0.18	1000	
KQ1008TTE68N*	68N	68					1000	0.20		
KQ1008TTE82N*	82N	82						0.22		
KQ1008TTER10*	R10	100	25		60	100	950	0.56	650	
KQ1008TTER12*	R12	120					0.63			
KQ1008TTER15*	R15	150			45	100	850	0.70	580	
KQ1008TTER18*	R18	180					750	0.77	620	
KQ1008TTER22*	R22	220					700	0.84	500	
KQ1008TTER27*	R27	270					600	0.91	500	
KQ1008TTER33*	R33	330					570	1.05	450	
KQ1008TTER39*	R39	390					500	1.12	470	
KQ1008TTER47*	R47	470					450	1.19		
KQ1008TTER56*	R56	560					415	1.33	400	
KQ1008TTER62*	R62	620					375	1.40	300	
KQ1008TTER68*	R68	680						1.47	400	
KQ1008TTER75*	R75	750						360	1.54	360
KQ1008TTER82*	R82	820					350	1.61	400	
KQ1008TTER91*	R91	910					35	50	320	1.68
KQ1008TTE1R0*	1R0	1000	290		1.75	370				
KQ1008TTE1R2*	1R2	1200	250		1.6	310				
KQ1008TTE1R5*	1R5	1500	28		50	200	1.7	300		
KQ1008TTE1R8*	1R8	1800				160	1.9	270		
KQ1008TTE2R2*	2R2	2200					2.2	250		
KQ1008TTE2R7*	2R7	2700	22		25	140	2.3		230	
KQ1008TTE3R3*	3R3	3300				110	2.7			
KQ1008TTE3R9*	3R9	3900	20		25	100	2.8	210		
KQ1008TTE4R7*	4R7	4700				90	3.1			
KQ1008TTE5R6*	5R6	5600	15		7.9	80	2.5	240		
KQ1008TTE6R8*	6R8	6800				70	2.8	200		
KQ1008TTE8R2*	8R2	8200				65	3.0	170		
KQ1008TTE100*	100	10000				60	3.4	150		

* Add tolerance character (C, G, H, J, K, M)

Operating Temperature Range: -40°C ~ +125°C (Self-heating is included). That the operating temperature upper limit temperature of the coil winding portions (ambient temperature + self-heating) is (+125°C) or less.

environmental applications

Performance Characteristics

Parameter	Requirements Maximum Limit	Δ L/L Typical	Test Method
Resistance to Soldering Heat	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±2.7% Δ Q/Q: ±6.6%	260°C ± 5°C, 10s ± 1s
Rapid Change of Temperature	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±2.1% Δ Q/Q: ±5.3%	-40°C (30min.)/ +125°C (30min.) 100 cycles
Low Temperature Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±1.8% Δ Q/Q: ±2.8%	-40°C ± 2°C, 1000h
High Temperature Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±1.8% Δ Q/Q: ±5.3%	125°C ± 2°C, 1000h
Moisture Exposure	No significant abnormality in appearance Δ L/L: ±5%, Δ Q/Q: ±10%	Δ L/L: ±0.9% Δ Q/Q: ±6.9%	40°C ± 2°C, 90%~95%RH, 1000h
Resistance to Solvent	No damage and marking shall remain legible	—	Accordance with MIL-STD 202F Method 215

For complete environmental specifications, please refer to www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

1/02/14

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KOA Speer:

[KQT0402TTD36NJ](#) [KQ0603TTE6N8G](#) [KQ1008TTE15NJ](#) [KQT0402TTD3N6J](#) [KQ1008TTE27NJ](#) [KQT0402TTD3N9J](#)
[KQ1008TTER47G](#) [KQT0402TTD3N3J](#) [KQ1008TTER82G](#) [KQ1008TTER68G](#) [KQ0603TTE7N5G](#) [KQ1008TTER62G](#)
[KQ0603TTE72NG](#) [KQ1008TTER22G](#) [KQ0603TTE68NG](#) [KQ1008TTER27G](#) [KQ1008TTE2R2G](#) [KQ1008TTER15G](#)
[KQ1008TTE22NJ](#) [KQ1008TTER12G](#) [KQ1008TTER18G](#) [KQ1008TTER10G](#) [KQ1008TTE2R7G](#) [KQ1008TTE10NJ](#)
[KQ1008TTE100G](#) [KQ1008TTER91G](#) [KQ1008TTE18NJ](#) [KQ1008TTER56G](#) [KQT0402TTD27NJ](#) [KQ1008TTER33G](#)
[KQ1008TTER39G](#) [KQ1008TTE1R2G](#) [KQ1008TTE1R8G](#) [KQ1008TTE1R0G](#) [KQ1008TTE1R5G](#) [KQ1008TTE12NJ](#)
[KQ1008TTER75G](#) [KQT0402TTD23NJ](#) [KQ1008TTE6R8G](#) [KQ0603TTE30NG](#) [KQ0805TTE56NG](#) [KQ0603TTE10NG](#)
[KQ0603TTER15G](#) [KQ0603TTER11G](#) [KQ0603TTER10G](#) [KQ0603TTER18G](#) [KQ0603TTER12G](#) [KQ0603TTE22NG](#)
[KQ0603TTE18NJ](#) [KQ0603TTE18NG](#) [KQ1008TTE82NG](#) [KQ1008TTE8R2G](#) [KQ0603TTE24NG](#) [KQ0603TTE36NG](#)
[KQ0603TTE12NG](#) [KQ0603TTE12NJ](#) [KQ0603TTE3N6J](#) [KQ1008TTE68NG](#) [KQ0603TTE3N9J](#) [KQ0603TTE1N8J](#)
[KQ0603TTE1N6J](#) [KQ0603TTER33G](#) [KQ0603TTER39G](#) [KQ0603TTE16NG](#) [KQ0603TTE33NG](#) [KQ0603TTE82NG](#)
[KQ0603TTER27G](#) [KQ0603TTER22G](#) [KQT0402TTD8N2J](#) [KQ0603TTE8N7G](#) [KQ0603TTE39NG](#) [KQT0402TTD9N0J](#)
[KQ0805TTE47NJ](#) [KQ0805TTER82G](#) [KQ0603TTE27NG](#) [KQ1008TTE47NJ](#) [KQT0402TTD5N6J](#) [KQ0603TTE15NJ](#)
[KQ0603TTE15NG](#) [KQT0402TTD40NJ](#) [KQ0603TTE11NG](#) [KQ0805TTE15NJ](#) [KQ0805TTER47G](#) [KQ0805TTE27NJ](#)
[KQ0805TTE39NJ](#) [KQ1008TTE39NJ](#) [KQT0402TTD7N5J](#) [KQ0603LTE3N3J](#) [KQ0805TTE2N8J](#) [KQ0603TTE82NJ](#)
[KQ0603TTER15J](#) [KQ0603TTER18J](#) [KQ0805TTE82NJ](#) [KQ0805TTER56J](#) [KQT0402TTD2N0C](#) [KQ0805TTER22K](#)
[KQT0402TK001-KIT](#) [KQT0402LTD56NJ](#) [KQT0402LTD9N0J](#) [KQ0603TTE8N2G](#)