

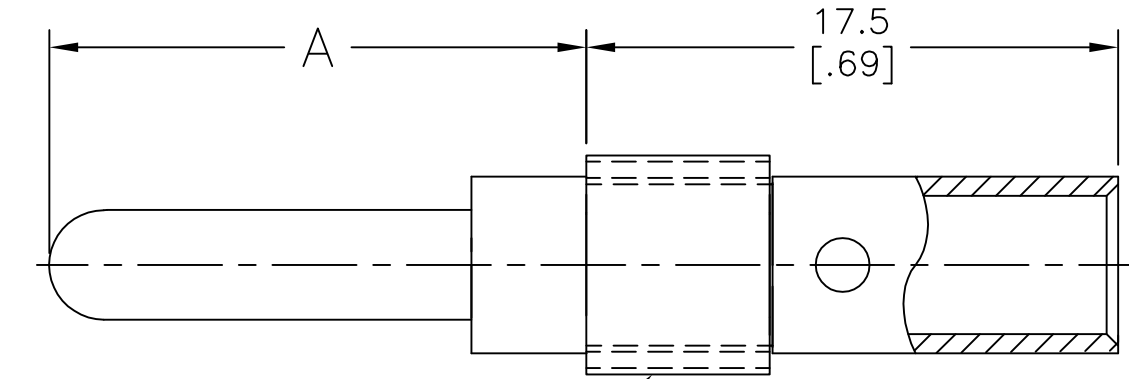


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	EC OB20-0791-98	30/JUN/98	—	DAP
	E	REVISED PER ECO-17-010218	14JUL2017	RS	MZ

- 1 MATERIAL: COPPER ALLOY.
- 2 FINISH: 30 MICROINCHES MIN. GOLD OVER
50 MICROINCHES MIN. NICKEL.
- 3 WIRE BARREL WILL ACCEPT #8 AWG WIRE.
- 4 MATES WITH AMP P/N 193990-X.
- 5 FINISH: 200 MICROINCHES MIN. SILVER OVER
40 MICROINCHES MIN. NICKEL.
- 6 ALL DIMENSIONS ARE REFERENCE ONLY.

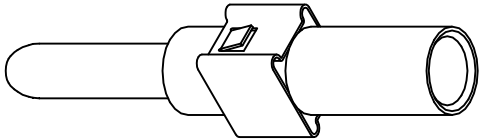

RETENTION CLIP
MATERIAL: STAINLESS STEEL



	5	15.7[.62]	193991-4
OBSOLETE	5	25.4[1.00]	193991-3
OBSOLETE	2	15.7[.62]	193991-2
OBSOLETE	2	25.4[1.00]	193991-1
	FINISH	A	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.A.P.	04-13-94	TE Connectivity PIN ASSEMBLY, TYPE XII HIGH CURRENT #8 AWG		
DIMENSIONS: mm [INCHES]		CHK	—			
		APVD	—			
		PRODUCT SPEC	—			
		APPLICATION SPEC	—	SIZE	CAGE CODE	DRAWING NO
		WEIGHT	—	A3	00779	C=193991
MATERIAL	1	CUSTOMER DRAWING		SCALE	—	SHEET 1 OF 1
						REV E