

# Green Mode Power Switch for Valley Switching Converter - Low EMI and High Efficiency

## FSQ0365, FSQ0265, FSQ0165, FSQ321

### Description

A Valley Switching Converter generally shows lower EMI and higher power conversion efficiency than a conventional hard-switched converter with a fixed switching frequency. The FSQ-series is an integrated Pulse-Width Modulation (PWM) controller and SENSEFET<sup>®</sup> specifically designed for valley switching operation with minimal external components. The PWM controller includes an integrated fixed-frequency oscillator, under-voltage lockout, Leading-Edge Blanking (LEB), optimized gate driver, internal soft-start, temperature-compensated precise current sources for loop compensation, and self-protection circuitry.

Compared with discrete MOSFET and PWM controller solutions, the FSQ-series reduces total cost, component count, size and weight; while simultaneously increasing efficiency, productivity, and system reliability. This device provides a basic platform for cost-effective designs of valley switching fly-back converters.

### Features

- Optimized for Valley Switching Converter (VSC)
- Low EMI through Variable Frequency Control and Inherent Frequency Modulation
- High Efficiency through Minimum Voltage Switching
- Narrow Frequency Variation Range Over Wide Load and Input Voltage Variation
- Advanced Burst-Mode Operation for Low Standby Power Consumption
- Pulse-by-Pulse Current Limit
- Protection Functions: Overload Protection (OLP), Over-Voltage Protection (OVP), Abnormal Over-Current Protection (AOCP), Internal Thermal Shutdown (TSD)
- Under-Voltage Lockout (UVLO) with Hysteresis
- Internal Startup Circuit
- Internal High-Voltage SENSEFET: 650 V
- Built-in Soft-Start: 15 ms


### Related Application Notes

- <http://www.onsemi.com/pub/Collateral/AN-4137.pdf.pdf>
- <http://www.onsemi.com/pub/Collateral/AN-4141.pdf.pdf>
- <http://www.onsemi.com/pub/Collateral/AN-4150.pdf.pdf>
- <https://www.onsemi.com/pub/Collateral/AN-4134.PDF>




ON Semiconductor<sup>®</sup>

[www.onsemi.com](http://www.onsemi.com)




PDIP-8  
CASE 626-05



PDIP8 GW  
CASE 709AJ

### MARKING DIAGRAM



|         |                                      |
|---------|--------------------------------------|
| \$Y     | = ON Semiconductor Logo              |
| &E      | = Designated Space                   |
| &Z      | = Assembly Plant Code                |
| &2      | = 2-Digit Date code format           |
| &K      | = 2-Digits Lot Run Traceability Code |
| FSQxxxx | = Specific Device Code Data          |

### ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

### Applications

- Power Supplies for DVD Player, DVD Recorder, Set-Top Box
- Adapter
- Auxiliary Power Supply for PC, LCD TV, and PDP TV

# FSQ0365, FSQ0265, FSQ0165, FSQ321

**Table 1. ORDERING INFORMATION**

| Part Number | Package  | Shipping <sup>†</sup> | Operating Temperature | Current Limit | R <sub>DS(ON)</sub> (Max.) | Maximum Output Table <sup>(1)</sup>     |                           |                          |                           |
|-------------|----------|-----------------------|-----------------------|---------------|----------------------------|-----------------------------------------|---------------------------|--------------------------|---------------------------|
|             |          |                       |                       |               |                            | 230 V <sub>AC</sub> ±15% <sup>(2)</sup> |                           | 85 – 265 V <sub>AC</sub> |                           |
|             |          |                       |                       |               |                            | Adapter <sup>(3)</sup>                  | Open Frame <sup>(4)</sup> | Adapter <sup>(3)</sup>   | Open Frame <sup>(4)</sup> |
| FSQ321      | PDIP-8   | 3000 / Tube           | -40 to +85°C          | 0.6 A         | 19 Ω                       | 8W                                      | 12W                       | 7W                       | 10W                       |
| FSQ321LX    | PDIP8 GW | 1000 / Tape & Reel    |                       |               |                            |                                         |                           |                          |                           |
| FSQ0165RN   | PDIP-8   | 3000 / Tube           | -40 to +85°C          | 0.9 A         | 10 Ω                       | 10W                                     | 15W                       | 9W                       | 13W                       |
| FSQ0165RLX  | PDIP8 GW | 1000 / Tape & Reel    |                       |               |                            |                                         |                           |                          |                           |
| FSQ0265RN   | PDIP-8   | 3000 / Tube           | -40 to +85°C          | 1.2 A         | 6 Ω                        | 14W                                     | 20W                       | 11W                      | 16W                       |
| FSQ0265RLX  | PDIP8 GW | 1000 / Tape & Reel    |                       |               |                            |                                         |                           |                          |                           |
| FSQ0365RN   | PDIP-8   | 3000 / Tube           | -40 to +85°C          | 1.5 A         | 4.5 Ω                      | 17.5W                                   | 25W                       | 13W                      | 19W                       |
| FSQ0365RLX  | PDIP8 GW | 1000 / Tape & Reel    |                       |               |                            |                                         |                           |                          |                           |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

1. The junction temperature can limit the maximum output power.
2. 230 V<sub>AC</sub> or 100/115 V<sub>AC</sub> with voltage doubler. The maximum power with CCM operation.
3. Typical continuous power in a non-ventilated, enclosed adapter measured at 50°C ambient temperature.
4. Maximum practical continuous power in an open-frame design at 50°C ambient temperature.

**DISCONTINUED**  
THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN  
PLEASE CONTACT YOUR onsemi  
REPRESENTATIVE FOR INFORMATION



## Pin Assignments

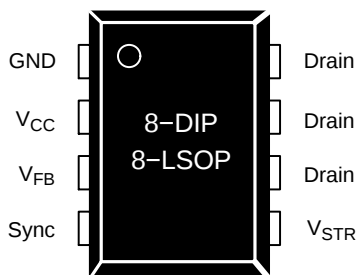


Figure 3. Pin Configuration (Top View)

Table 2. PIN DEFINITIONS

| Pin#    | Name             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | GND              | SENSEFET source terminal on primary side and internal control ground.                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 2       | V <sub>CC</sub>  | Positive supply voltage input. Although connected to an auxiliary transformer winding, current is supplied from pin 5 (V <sub>str</sub> ) via an internal switch during startup (see Figure 2). It is not until V <sub>CC</sub> reaches the UVLO upper threshold (12 V) that the internal startup switch opens and device power is supplied via the auxiliary transformer winding.                                                                                                              |
| 3       | V <sub>fb</sub>  | The feedback voltage pin is the non-inverting input to the PWM comparator. It has a 0.9 mA current source connected internally while a capacitor and opto-coupler are typically connected externally. There is a time delay while charging external capacitor C <sub>fb</sub> from 3 V to 6 V using an internal 5 $\mu$ A current source. This delay prevents false triggering under transient conditions, but still allows the protection mechanism to operate under true overload conditions. |
| 4       | Sync             | This pin is internally connected to the sync-detect comparator for valley switching. Typically the voltage of the auxiliary winding is used as Sync input voltage and external resistors and capacitor are needed to make delay to match valley point. The threshold of the internal sync comparator is 0.7 V / 0.2 V.                                                                                                                                                                          |
| 5       | V <sub>str</sub> | This pin is connected to the rectified AC line voltage source. At startup, the internal switch supplies internal bias and charges an external storage capacitor placed between the V <sub>CC</sub> pin and ground. Once the V <sub>CC</sub> reaches 12 V, the internal switch is opened.                                                                                                                                                                                                        |
| 6, 7, 8 | Drain            | The drain pins are designed to connect directly to the primary lead of the transformer and are capable of switching a maximum of 650 V. Minimizing the length of the trace connecting these pins to the transformer decreases leakage inductance.                                                                                                                                                                                                                                               |

# FSQ0365, FSQ0265, FSQ0165, FSQ321

**Table 3. ABSOLUTE MAXIMUM RATINGS** ( $T_A = 25^\circ\text{C}$  unless otherwise specified)

| Symbol            | Parameter                                  |         | Min.     | Max.               | Unit |
|-------------------|--------------------------------------------|---------|----------|--------------------|------|
| V <sub>STR</sub>  | Vstr Pin Voltage                           |         | 500      |                    | V    |
| V <sub>DS</sub>   | Drain Pin Voltage                          |         | 650      |                    | V    |
| V <sub>CC</sub>   | Supply Voltage                             |         |          | 20                 | V    |
| V <sub>FB</sub>   | Feedback Voltage Range                     |         | −0.3     | 9.0                | V    |
| V <sub>Sync</sub> | Sync Pin Voltage                           |         | −0.3     | 9.0                | V    |
| I <sub>DM</sub>   | Drain Current Pulsed (Note 5)              | FSQ0365 |          | 12.0               | A    |
|                   |                                            | FSQ0265 |          | 8.0                |      |
|                   |                                            | FSQ0165 |          | 4.0                |      |
|                   |                                            | FSQ321  |          | 1.5                |      |
| E <sub>AS</sub>   | Single Pulsed Avalanche Energy (Note 6)    | FSQ0365 |          | 230                | mJ   |
|                   |                                            | FSQ0265 |          | 140                |      |
|                   |                                            | FSQ0165 |          | 50                 |      |
|                   |                                            | FSQ321  |          | 10                 |      |
| P <sub>D</sub>    | Total Power Dissipation                    |         |          | 1.5                | W    |
| T <sub>J</sub>    | Recommended Operating Junction Temperature |         | −40      | Internally Limited | °C   |
| T <sub>A</sub>    | Operating Ambient Temperature              |         | −40      | +85                | °C   |
| T <sub>STG</sub>  | Storage Temperature                        |         | −55      | +150               | °C   |
| ESD               | Human Body Model; JESD22−A114              |         | CLASS 1C |                    |      |
|                   | Machine Model; JESD22−A115                 |         | CLASS B  |                    |      |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

5. Repetitive rating; pulse width limited by maximum junction temperature.

6.  $L = 51\text{ mH}$ , starting  $T_J = 25^\circ\text{C}$ .

**Table 4. THERMAL IMPEDANCE**

| Symbol                | Parameter                                       | Value | Unit               |
|-----------------------|-------------------------------------------------|-------|--------------------|
| <b>8-DIP (Note 7)</b> |                                                 |       |                    |
| $\theta_{JA}$         | Junction-to-Ambient Thermal Resistance (Note 8) | 80    | $^\circ\text{C/W}$ |
| $\theta_{JC}$         | Junction-to-Case Thermal Resistance (Note 9)    | 20    |                    |
| $\theta_{JT}$         | Junction-to-Top Thermal Resistance (Note 10)    | 35    |                    |

7. All items are tested with the standards JESD 51-2 and 51-10 (DIP)

8. Free-standing with no heat-sink, under natural convection

9. Infinite cooling condition – refer to the SEMI G30-88

10. Measured on the package top surface.

# FSQ0365, FSQ0265, FSQ0165, FSQ321

**Table 5. ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise specified)

| Symbol                | Parameter                                  |         | Condition                                                 | Min. | Typ. | Max. | Unit |
|-----------------------|--------------------------------------------|---------|-----------------------------------------------------------|------|------|------|------|
| SENSEFET Section      |                                            |         |                                                           |      |      |      |      |
| BV <sub>DSS</sub>     | Drain–Source Breakdown Voltage             |         | V <sub>CC</sub> = 0 V, I <sub>D</sub> = 100 μA            | 650  |      |      | V    |
| I <sub>DSS</sub>      | Zero–Gate–Voltage Drain Current            |         | V <sub>DS</sub> = 650 V                                   |      |      | 100  | A    |
| R <sub>DS(ON)</sub>   | Drain–Source On–State Resistance (Note 11) | FSQ0365 | T <sub>J</sub> = 25°C, I <sub>D</sub> = 0.5 A             |      | 3.5  | 4.5  | Ω    |
|                       |                                            | FSQ0265 |                                                           |      | 5.0  | 6.0  |      |
|                       |                                            | FSQ0165 |                                                           |      | 8.0  | 10.0 |      |
|                       |                                            | FSQ321  |                                                           |      | 14.0 | 19.0 |      |
| C <sub>ISS</sub>      | Input Capacitance                          | FSQ0365 | V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 25 V, f = 1 MHz  |      | 315  |      | pF   |
|                       |                                            | FSQ0265 |                                                           |      | 550  |      |      |
|                       |                                            | FSQ0165 |                                                           |      | 250  |      |      |
|                       |                                            | FSQ321  |                                                           |      | 162  |      |      |
| C <sub>OSS</sub>      | Output Capacitance                         | FSQ0365 | V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 25 V, f = 1 MHz  |      | 47   |      | pF   |
|                       |                                            | FSQ0265 |                                                           |      | 38   |      |      |
|                       |                                            | FSQ0165 |                                                           |      | 25   |      |      |
|                       |                                            | FSQ321  |                                                           |      | 18   |      |      |
| C <sub>RSS</sub>      | Reverse Transfer Capacitance               | FSQ0365 | V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 25 V, f = 1 MHz  |      | 9.0  |      | pF   |
|                       |                                            | FSQ0265 |                                                           |      | 17.0 |      |      |
|                       |                                            | FSQ0165 |                                                           |      | 10.0 |      |      |
|                       |                                            | FSQ321  |                                                           |      | 3.8  |      |      |
| t <sub>d(on)</sub>    | Turn–On Delay                              | FSQ0365 | V <sub>DD</sub> = 350 V, I <sub>D</sub> = 25 mA           |      | 11.2 |      | ns   |
|                       |                                            | FSQ0265 |                                                           |      | 20.0 |      |      |
|                       |                                            | FSQ0165 |                                                           |      | 12.0 |      |      |
|                       |                                            | FSQ321  |                                                           |      | 9.5  |      |      |
| t <sub>r</sub>        | Rise Time                                  | FSQ0365 | V <sub>DD</sub> = 350 V, I <sub>D</sub> = 25 mA           |      | 34   |      | ns   |
|                       |                                            | FSQ0265 |                                                           |      | 15   |      |      |
|                       |                                            | FSQ0165 |                                                           |      | 4    |      |      |
|                       |                                            | FSQ321  |                                                           |      | 19   |      |      |
| t <sub>d(off)</sub>   | Turn–Off Delay                             | FSQ0365 | V <sub>DD</sub> = 350 V, I <sub>D</sub> = 25 mA           |      | 28.2 |      | ns   |
|                       |                                            | FSQ0265 |                                                           |      | 55.0 |      |      |
|                       |                                            | FSQ0165 |                                                           |      | 30.0 |      |      |
|                       |                                            | FSQ321  |                                                           |      | 33.0 |      |      |
| t <sub>f</sub>        | Fall Time                                  | FSQ0365 | V <sub>DD</sub> = 350 V, I <sub>D</sub> = 25 mA           |      | 32   |      | ns   |
|                       |                                            | FSQ0265 |                                                           |      | 25   |      |      |
|                       |                                            | FSQ0165 |                                                           |      | 10   |      |      |
|                       |                                            | FSQ321  |                                                           |      | 42   |      |      |
| Burst–Mode Section    |                                            |         |                                                           |      |      |      |      |
| V <sub>BURH</sub>     | Burst–Mode Voltage                         |         | T <sub>J</sub> = 25°C, t <sub>PD</sub> = 200 ns (Note 12) | 0.45 | 0.55 | 0.65 | V    |
| V <sub>BURL</sub>     |                                            |         |                                                           | 0.25 | 0.35 | 0.45 | V    |
| V <sub>BUR(HYS)</sub> |                                            |         |                                                           |      | 200  |      | mV   |

# FSQ0365, FSQ0265, FSQ0165, FSQ321

**Table 5. ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise specified) (continued)

| Symbol               | Parameter                                    |                | Conditions                                                                                        | Min. | Typ. | Max. | Unit |
|----------------------|----------------------------------------------|----------------|---------------------------------------------------------------------------------------------------|------|------|------|------|
| Control Section      |                                              |                |                                                                                                   |      |      |      |      |
| t <sub>ON.MAX1</sub> | Maximum On Time1                             | All but FSQ321 | T <sub>J</sub> = 25°C                                                                             | 10.5 | 12.0 | 13.5 | μs   |
| t <sub>ON.MAX2</sub> | Maximum On Time2                             | FSQ321         | T <sub>J</sub> = 25°C                                                                             | 6.35 | 7.06 | 7.77 | μs   |
| t <sub>B1</sub>      | Blanking Time1                               | All but FSQ321 |                                                                                                   | 13.2 | 15.0 | 16.8 | μs   |
| t <sub>B2</sub>      | Blanking Time2                               | FSQ321         |                                                                                                   | 7.5  | 8.2  |      | μs   |
| t <sub>W</sub>       | Detection Time Window                        |                | T <sub>J</sub> = 25°C, V <sub>sync</sub> = 0 V                                                    |      | 3.0  |      | μs   |
| Δf <sub>S</sub>      | Switching Frequency Variation (Note 14)      |                | −25°C < T <sub>J</sub> < 85°C                                                                     |      | ±5   | ±10  | %    |
| I <sub>FB</sub>      | Feedback Source Current                      |                | V <sub>FB</sub> = 0 V                                                                             | 700  | 900  | 1100 | μA   |
| D <sub>MIN</sub>     | Minimum Duty Cycle                           |                | V <sub>FB</sub> = 0 V                                                                             |      |      | 0    | %    |
| V <sub>START</sub>   | UVLO Threshold Voltage                       |                | After Turn-on                                                                                     | 11   | 12   | 13   | V    |
| V <sub>STOP</sub>    |                                              |                |                                                                                                   | 7    | 8    | 9    | V    |
| t <sub>S/S1</sub>    | Internal Soft-Start Time 1                   | All but FSQ321 | With Free-Running Frequency                                                                       |      | 15   |      | ms   |
| t <sub>S/S2</sub>    | Internal Soft-Start Time 2                   | FSQ321         | With Free-Running Frequency                                                                       |      | 10   |      | ms   |
| Protection Section   |                                              |                |                                                                                                   |      |      |      |      |
| I <sub>LIM</sub>     | Peak Current Limit                           | FSQ0365        | T <sub>J</sub> = 25°C, di/dt = 240 mA/μs                                                          | 1.32 | 1.50 | 1.68 | A    |
|                      |                                              | FSQ0265        | T <sub>J</sub> = 25°C, di/dt = 200 mA/μs                                                          | 1.06 | 1.20 | 1.34 |      |
|                      |                                              | FSQ0165        | T <sub>J</sub> = 25°C, di/dt = 175 mA/μs                                                          | 0.8  | 0.9  | 1.0  |      |
|                      |                                              | FSQ321         | T <sub>J</sub> = 25°C, di/dt = 125 mA/μs                                                          | 0.53 | 0.60 | 0.67 |      |
| V <sub>SD</sub>      | Shutdown Feedback Voltage                    |                | V <sub>CC</sub> = 15 V                                                                            | 5.5  | 6.0  | 6.5  | V    |
| I <sub>DELAY</sub>   | Shutdown Delay Current                       |                | V <sub>FB</sub> = 5 V                                                                             | 4.0  | 5.0  | 6.0  | μA   |
| t <sub>LEB</sub>     | Leading-Edge Blanking Time <sup>(13)</sup>   |                |                                                                                                   |      | 200  |      | ns   |
| V <sub>OVP</sub>     | Over-Voltage Protection                      |                | V <sub>CC</sub> = 15 V, V <sub>FB</sub> = 2 V                                                     | 5.5  | 6.0  | 6.5  | V    |
| t <sub>OVP</sub>     | Over-Voltage Protection Blanking Time        |                |                                                                                                   | 2    | 3    | 4    | μs   |
| T <sub>SD</sub>      | Thermal Shutdown Temperature (Note 13)       |                |                                                                                                   | 125  | 140  | 155  | °C   |
| Sync Section         |                                              |                |                                                                                                   |      |      |      |      |
| V <sub>SH</sub>      | Sync Threshold Voltage                       |                |                                                                                                   | 0.55 | 0.70 | 0.85 | V    |
| V <sub>SL</sub>      |                                              |                |                                                                                                   | 0.14 | 0.20 | 0.26 | V    |
| t <sub>Sync</sub>    | Sync Delay Time (Notes 13, 14)               |                |                                                                                                   |      | 300  |      | ns   |
| Total Device Section |                                              |                |                                                                                                   |      |      |      |      |
| I <sub>OP</sub>      | Operating Supply Current (Control Part Only) |                | V <sub>CC</sub> = 15 V                                                                            | 1    | 3    | 5    | mA   |
| I <sub>START</sub>   | Start Current                                |                | V <sub>CC</sub> = V <sub>START</sub> − 0.1 V (Before V <sub>CC</sub> Reaches V <sub>START</sub> ) | 270  | 360  | 450  | μA   |
| I <sub>CH</sub>      | Startup Charging Current                     |                | V <sub>CC</sub> = 0 V, V <sub>STR</sub> = Minimum 40 V                                            | 0.65 | 0.85 | 1.00 | mA   |
| V <sub>STR</sub>     | Minimum V <sub>STR</sub> Supply Voltage      |                |                                                                                                   |      | 26   |      | V    |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

11. Pulse test: Pulse-Width = 300  $\mu\text{s}$ , duty = 2%

12. Propagation delay in the control IC.

13. Though guaranteed, it is not 100% tested in production.

14. Includes gate turn-on time.

TYPICAL PERFORMANCE CHARACTERISTICS

(Characteristics graphs are normalized at  $T_A = 25^\circ\text{C}$ )

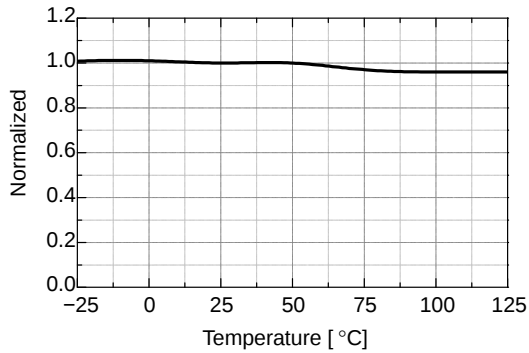


Figure 4. Operating Supply Current ( $I_{OP}$ ) vs.  $T_A$

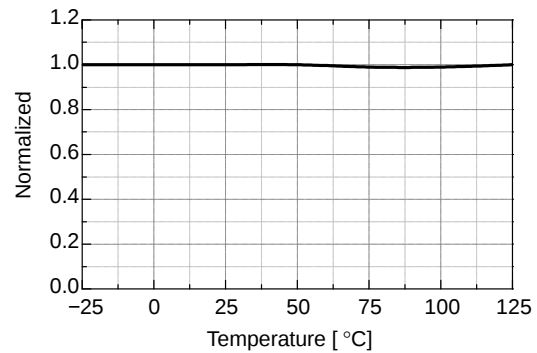


Figure 5. UVLO Start Threshold Voltage ( $V_{START}$ ) vs.  $T_A$

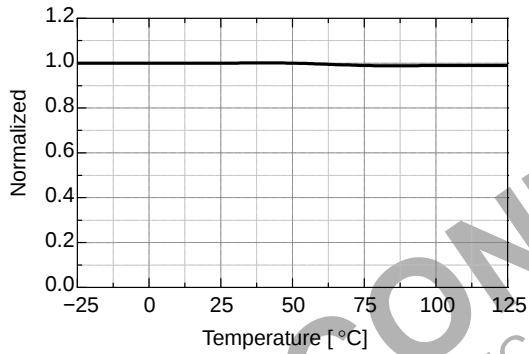


Figure 6. UVLO Stop Threshold Voltage ( $V_{STOP}$ ) vs.  $T_A$

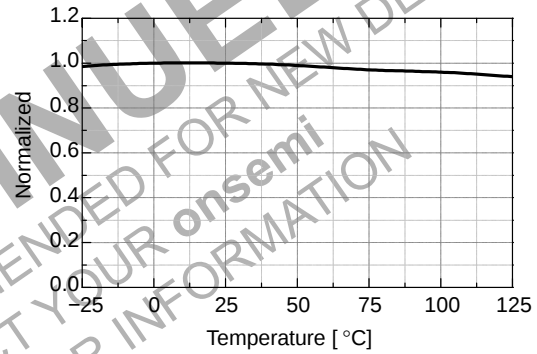


Figure 7. Startup Charging Current ( $I_{CH}$ ) vs.  $T_A$

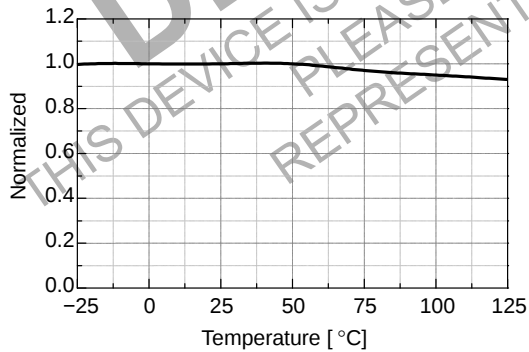


Figure 8. Initial Switching Frequency ( $f_S$ ) vs.  $T_A$


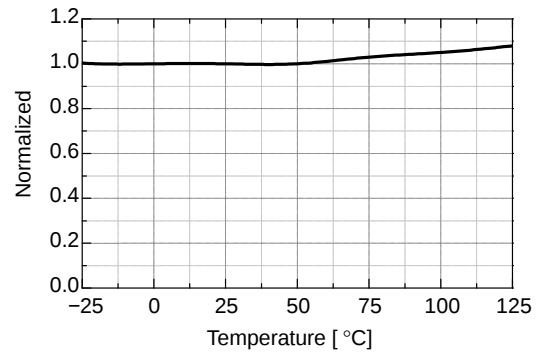



Figure 9. Maximum On Time ( $t_{ON.MAX}$ ) vs.  $T_A$

**TYPICAL PERFORMANCE CHARACTERISTICS** (continued)


(Characteristics graphs are normalized at  $T_A = 25^\circ\text{C}$ )

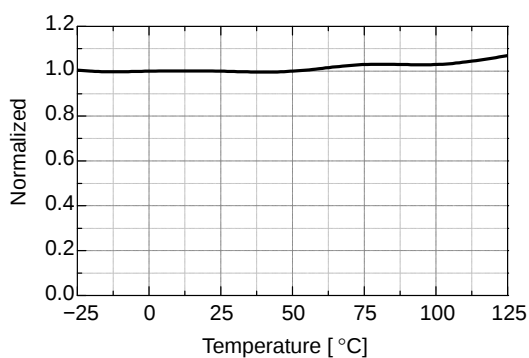


**Figure 10. Blanking Time ( $t_B$ ) vs.  $T_A$**

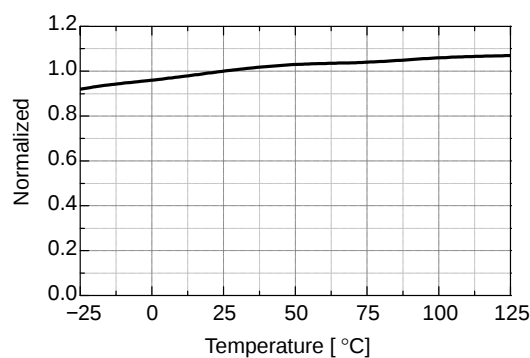


**Figure 11. Feedback Source Current ( $I_{FB}$ ) vs.  $T_A$**

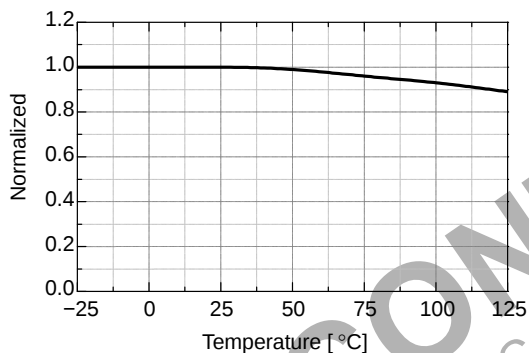


**Figure 12. Shutdown Delay Current ( $I_{DELAY}$ ) vs.  $T_A$**

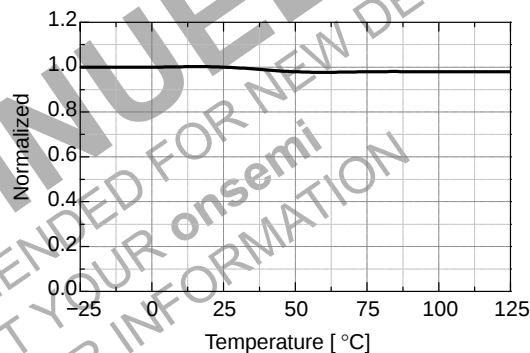

**Figure 13. Burst Mode High Threshold Voltage ( $V_{burh}$ ) vs.  $T_A$**

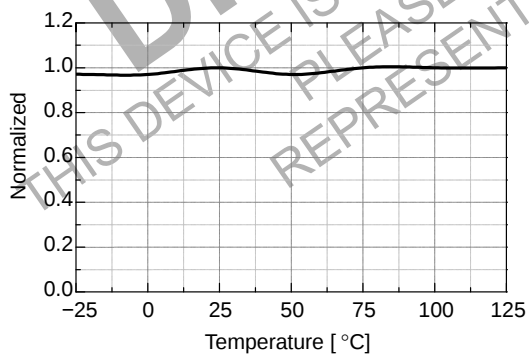


**Figure 14. Burst Mode Low Threshold Voltage ( $V_{burl}$ ) vs.  $T_A$**

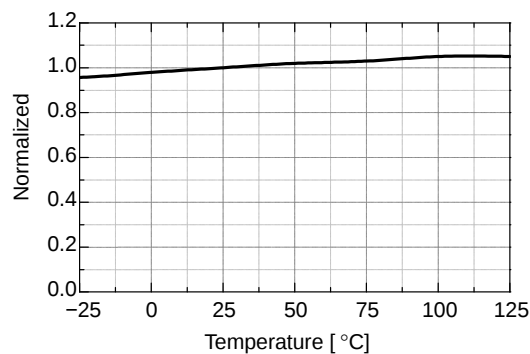


**Figure 15. Peak Current Limit ( $I_{LIM}$ ) vs.  $T_A$**

**TYPICAL PERFORMANCE CHARACTERISTICS** (continued)


(Characteristics graphs are normalized at  $T_A = 25^\circ\text{C}$ )

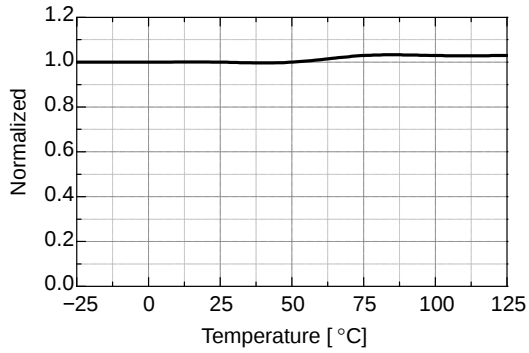


**Figure 16. Sync High Threshold ( $V_{SH}$ ) vs.  $T_A$**

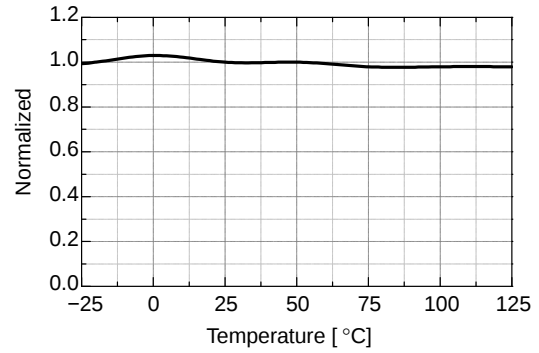

**Figure 17. Sync Low Threshold ( $V_{SL}$ ) vs.  $T_A$**

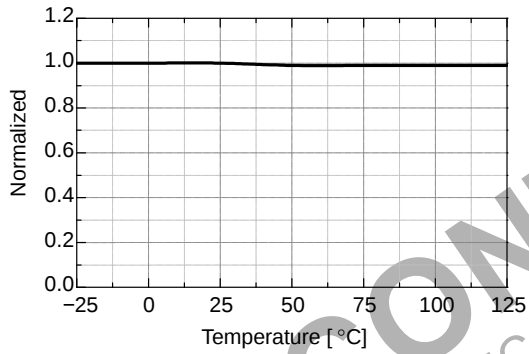

**Figure 18. Shutdown Feedback Voltage ( $V_{SD}$ ) vs.  $T_A$**

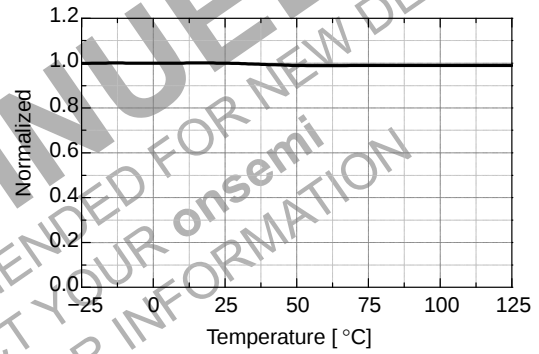

**Figure 19. Over-Voltage Protection ( $V_{OP}$ ) vs.  $T_A$**

## FUNCTIONAL DESCRIPTION

### Startup

At startup, an internal high-voltage current source supplies the internal bias and charges the external capacitor ( $C_a$ ) connected to the  $V_{CC}$  pin, as illustrated in Figure 20. When  $V_{CC}$  reaches 12 V, the power switch begins switching and the internal high-voltage current source is disabled. The power switch continues its normal switching operation and the power is supplied from the auxiliary transformer winding unless  $V_{CC}$  goes below the stop voltage of 8 V.

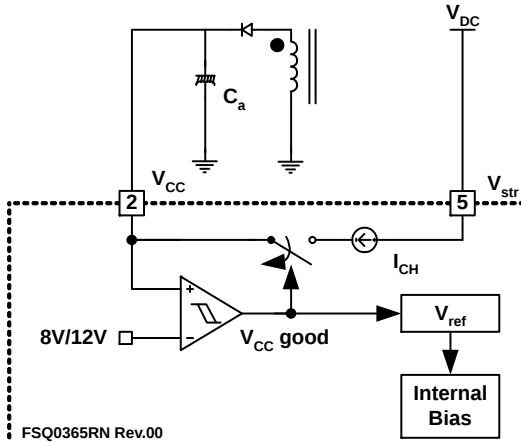


Figure 20. Startup Circuit

### Feedback Control

Power Switch employs Current Mode control, as shown in Figure 21. An opto-coupler (such as FOD817A) and shunt regulator (such as KA431) are often used to implement the feedback network. Comparing the feedback voltage with the voltage across the  $R_{SENSE}$  resistor makes it possible to control the switching duty cycle. When the reference pin voltage of the shunt regulator exceeds the internal reference voltage of 2.5 V, the opto-coupler LED current increases, pulling down the feedback voltage and reducing the duty cycle. This event typically occurs when input voltage is increased or output load is decreased.

### Pulse-by-Pulse Current Limit

Because Current Mode control is employed, the peak current through the SENSEFET is limited by the inverting input of PWM comparator ( $V_{FB}^*$ ), as shown in Figure 21. Assuming that the 0.9mA current source flows only through the internal resistor ( $3R + R = 2.8 \text{ k}\Omega$ ), the cathode voltage of diode D2 is about 2.5 V. Since D1 is blocked when the feedback voltage ( $V_{FB}$ ) exceeds 2.5V, the maximum voltage of the cathode of D2 is clamped at this voltage, clamping  $V_{FB}^*$ . Therefore, the peak value of the current through the SENSEFET is limited.

### Leading-Edge Blanking (LEB)

At the instant the internal SENSEFET is turned on, a high-current spike usually occurs through the SENSEFET, caused by primary-side capacitance and secondary-side rectifier reverse recovery. Excessive voltage across the

$R_{sense}$  resistor would lead to incorrect feedback operation in the Current Mode PWM control. To counter this effect, the power switch employs a leading-edge blanking (LEB) circuit. This circuit inhibits the PWM comparator for a short time ( $t_{LEB}$ ) after the SENSEFET is turned on.

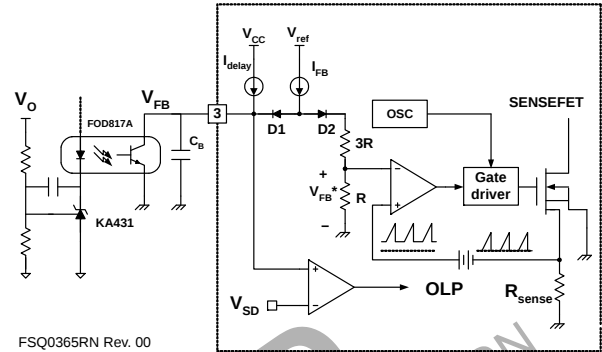


Figure 21. Pulse-Width-Modulation Circuit

### Synchronization

The FSQ-series employs a valley switching technique to minimize the switching noise and loss. The basic waveforms of the valley switching converter are shown in Figure 22. To minimize the MOSFET's switching loss, the MOSFET should be turned on when the drain voltage reaches its minimum value, as shown in Figure 22. The minimum drain voltage is indirectly detected by monitoring the  $V_{CC}$  winding voltage, as shown in Figure 22.

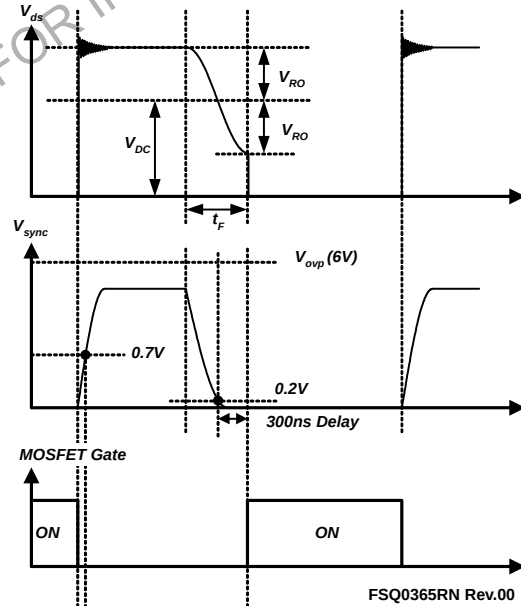


Figure 22. Valley Resonant Switching Waveforms

### Protection Circuits

The FSQ-series has several self-protective functions, such as Overload Protection (OLP), Abnormal Over-Current protection (AOC), Over-Voltage Protection (OVP), and Thermal Shutdown (TSD). All the protections

are implemented as Auto-Restart Mode. Once the fault condition is detected, switching is terminated and the SENSEFET remains off. This causes  $V_{CC}$  to fall. When  $V_{CC}$  falls down to the Under-Voltage Lockout (UVLO) stop voltage of 8 V, the protection is reset and the startup circuit charges the  $V_{CC}$  capacitor. When the  $V_{CC}$  reaches the start voltage of 12 V, the FSQ-series resumes normal operation. If the fault condition is not removed, the SENSEFET remains off and  $V_{CC}$  drops to stop voltage again. In this manner, the auto-restart can alternately enable and disable the switching of the power SENSEFET until the fault condition is eliminated. Because these protection circuits are fully integrated into the IC without external components, the reliability is improved without increasing cost.

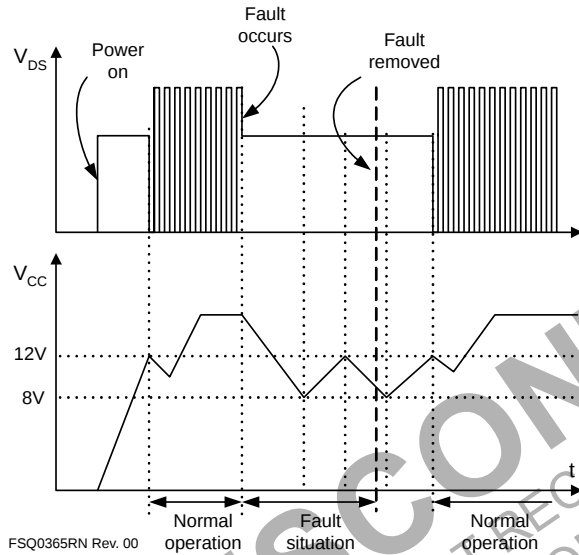


Figure 23. Auto-Restart Protection Waveforms

#### Overload Protection (OLP)

Overload is defined as the load current exceeding its normal level due to an unexpected abnormal event. In this situation, the protection circuit should trigger to protect the SMPS. However, even when the SMPS is in the normal operation, the overload protection circuit can be triggered during load transition. To avoid this undesired operation, the overload protection circuit is designed to trigger only after a specified time to determine whether it is a transient situation or a true overload situation. Because of the pulse-by-pulse current limit capability, the maximum peak current through the SENSEFET is limited, and therefore the maximum input power is restricted with a given input voltage. If the output consumes more than this maximum power, the output voltage ( $V_O$ ) decreases below the set voltage. This reduces the current through the opto-coupler LED, which also reduces the opto-coupler transistor current, thus increasing the feedback voltage ( $V_{FB}$ ). If  $V_{FB}$  exceeds 2.8 V, D1 is blocked and the 5  $\mu$ A current source starts to charge CB slowly up to  $V_{CC}$ . In this condition,  $V_{FB}$  continues increasing until it reaches 6 V, when the switching operation is terminated, as shown in Figure 24. The delay for

shutdown is the time required to charge CB from 2.8 V to 6 V with 5  $\mu$ A. A 20 ~ 50 ms delay is typical for most applications.

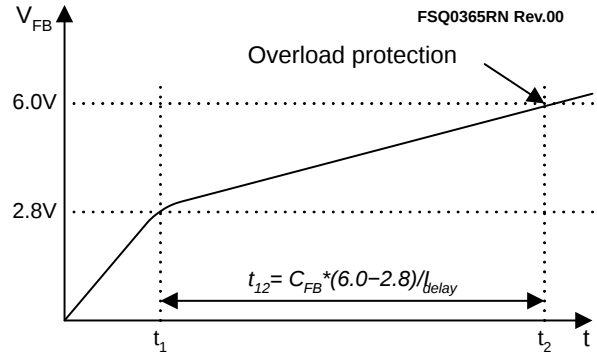


Figure 24. Overload Protection

#### Abnormal Over-Current Protection (AOCP)

When the secondary rectifier diodes or the transformer pins are shorted, a steep current with extremely high-di/dt can flow through the SENSEFET during the LEB time. Even though the FSQ-series has Overload Protection (OLP), it is not enough to protect the FSQ-series in that abnormal case, since severe current stress is imposed on the SENSEFET until OLP triggers. The FSQ-series has an internal Abnormal Over-Current Protection (AOCP) circuit as shown in Figure 25. When the gate turn-on signal is applied to the power SENSEFET, the AOCP block is enabled and monitors the current through the sensing resistor. The voltage across the resistor is compared with a preset AOCP level. If the sensing resistor voltage is greater than the AOCP level, the set signal is applied to the latch, resulting in the shutdown of the SMPS.

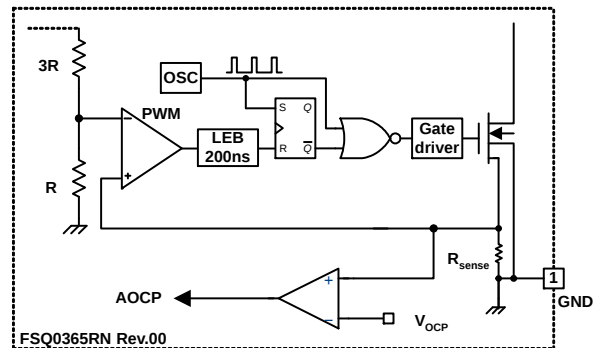


Figure 25. Abnormal Over-Current Protection

#### Over-Voltage Protection (OVP)

If the secondary-side feedback circuit malfunctions or a solder defect causes an opening in the feedback path, the current through the opto-coupler transistor becomes almost zero. Then  $V_{FB}$  climbs up in a similar manner to the overload situation, forcing the preset maximum current to be supplied to the SMPS until the overload protection triggers. Because more energy than required is provided to the output, the output voltage may exceed the rated voltage before the

overload protection triggers, resulting in the breakdown of the devices in the secondary side. To prevent this situation, an OVP circuit is employed. In general, the peak voltage of the sync signal is proportional to the output voltage and the FSQ-series uses a sync signal instead of directly monitoring the output voltage. If the sync signal exceeds 6 V, an OVP is triggered, shutting down the SMPS. To avoid undesired triggering of OVP during normal operation, the peak voltage of the sync signal should be designed below 6 V.

#### Thermal Shutdown (TSD)

The SENSEFET and the control IC are built in one package. This makes it easy for the control IC to detect the abnormal over temperature of the SENSEFET. If the temperature exceeds  $\sim 150^{\circ}\text{C}$ , the thermal shutdown triggers.

#### Soft-Start

An internal soft-start circuit increases PWM comparator inverting input voltage with the SENSEFET current slowly after it starts up. The typical soft-start time is 15 ms. The pulsewidth to the power switching device is progressively increased to establish the correct working conditions for transformers, inductors, and capacitors. The voltage on the output capacitors is progressively increased with the intention of smoothly establishing the required output voltage. This helps prevent transformer saturation and reduces stress on the secondary diode during startup.

#### Burst Operation

To minimize power dissipation in Standby Mode, the power switch enters Burst-Mode operation. As the load decreases, the feedback voltage decreases. As shown in Figure 26, the device automatically enters Burst Mode when the feedback voltage drops below  $V_{\text{BURL}}$  (350 mV). At this point, switching stops and the output voltages start to drop at a rate dependent on standby current load. This causes the feedback voltage to rise. Once it passes  $V_{\text{BURH}}$  (550 mV), switching resumes. The feedback voltage then falls and the process repeats. Burst Mode alternately enables and disables switching of the power SENSEFET, reducing switching loss in Standby Mode.

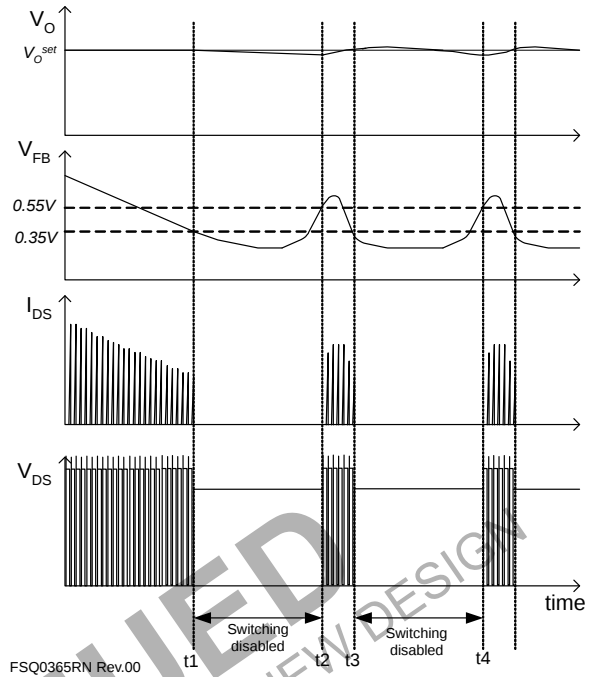


Figure 26. Waveforms of Burst Operation

#### Switching Frequency Limit

To minimize switching loss and Electromagnetic Interference (EMI), the MOSFET turns on when the drain voltage reaches its minimum value in valley switching operation. However, this causes switching frequency to increase at light load conditions. As the load decreases, the peak drain current diminishes and the switching frequency increases. This results in severe switching losses at light-load condition, as well as intermittent switching and audible noise. Because of these problems, the valley switching converter topology has limitations in a wide range of applications.

To overcome this problem, FSQ-series employs a frequency-limit function, as shown in Figure 27 and Figure 28. Once the SENSEFET is turned on, the next turn-on is prohibited during the blanking time ( $t_B$ ). After the blanking time, the controller finds the valley within the detection time window ( $t_W$ ) and turns on the MOSFET, as shown in Figure 27 and Figure 28 (cases A, B, and C). If no valley is found during  $t_W$ , the internal SENSEFET is forced to turn on at the end of  $t_W$  (case D). Therefore, FSQ devices have a minimum switching frequency of 55kHz and a maximum switching frequency of 67kHz, as shown in Figure 28.

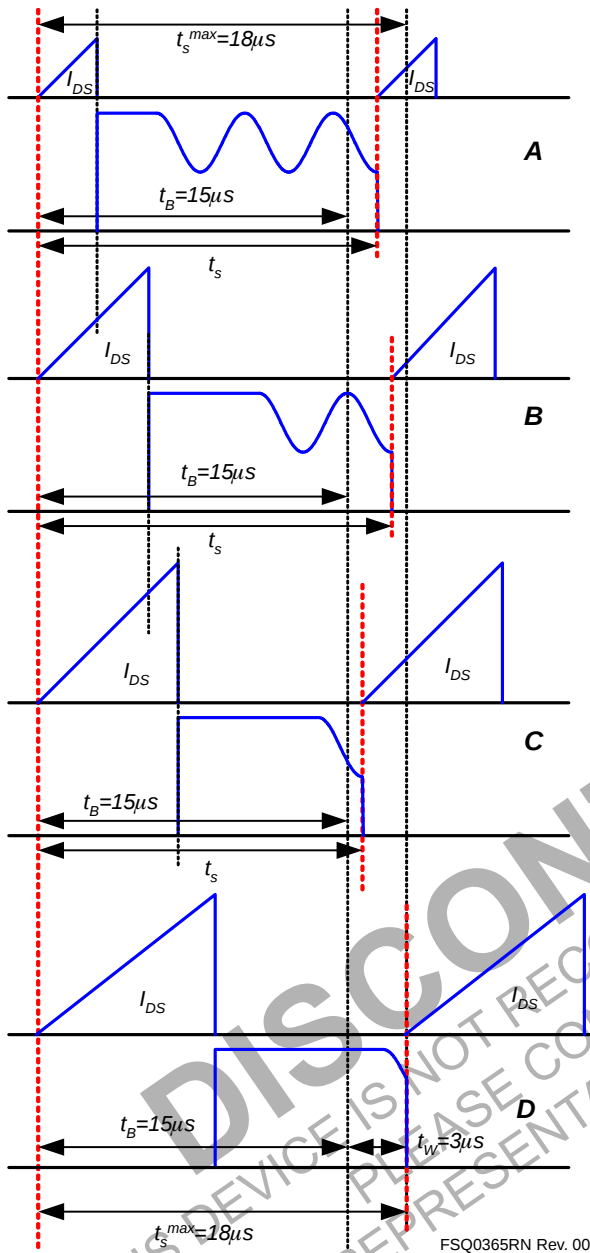


Figure 27. Valley Switching with Limited Frequency

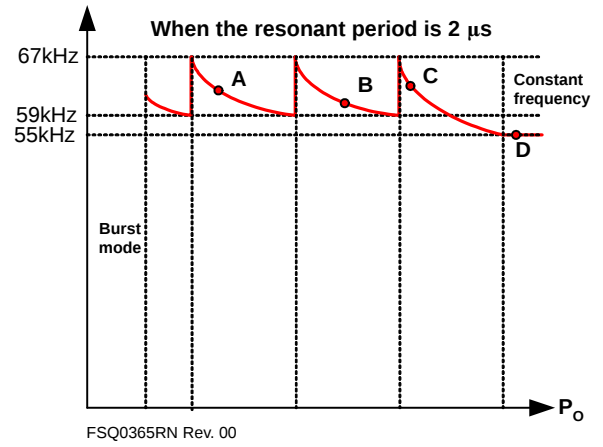


Figure 28. Switching Frequency Range

# FSQ0365, FSQ0265, FSQ0165, FSQ321

## Typical Application Circuit of FSQ0365RN

| Application             | Power Switch Device | Input Voltage Range    | Rated Output Power | Output Voltage (Maximum Current)                               |
|-------------------------|---------------------|------------------------|--------------------|----------------------------------------------------------------|
| DVD Player Power Supply | FSQ0365RN           | 85–265 V <sub>AC</sub> | 19 W               | 5.1 V (1.0 A)<br>3.4 V (1.0 A)<br>12 V (0.4 A)<br>16 V (0.3 A) |

### Features

- High efficiency ( > 77% at universal input)
- Low standby mode power consumption (< 1 W at 230 V<sub>AC</sub> input and 0.5 W load)
- Reduce EMI noise through Valley Switching operation
- Enhanced system reliability through various protection functions
- Internal soft-start: 15 ms

### Key Design Notes

- The delay time for overload protection is designed to be about 30 ms with C107 of 47nF. If faster/slower triggering of OLP is required, C107 can be changed to a smaller/larger value (eg. 100 nF for 60 ms).
- The input voltage of V<sub>sync</sub> must be higher than -0.3 V. By proper voltage sharing by R106 & R107 resistors, the input voltage can be adjusted.
- The SMD-type 100 nF capacitor must be placed as close as possible to V<sub>CC</sub> pin to avoid malfunction by abrupt pulsating noises and to improved surge immunity.

### Schematic

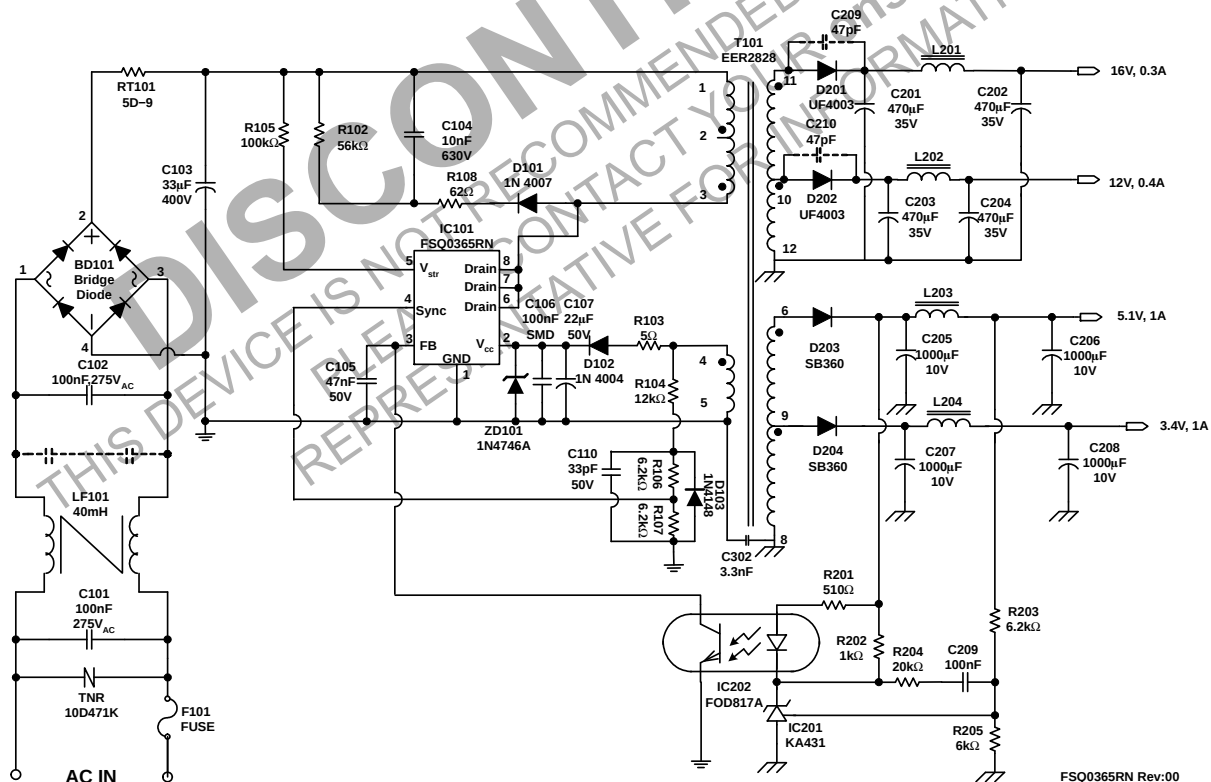


Figure 29. Demo Circuit of FSQ0365RN

Transformer

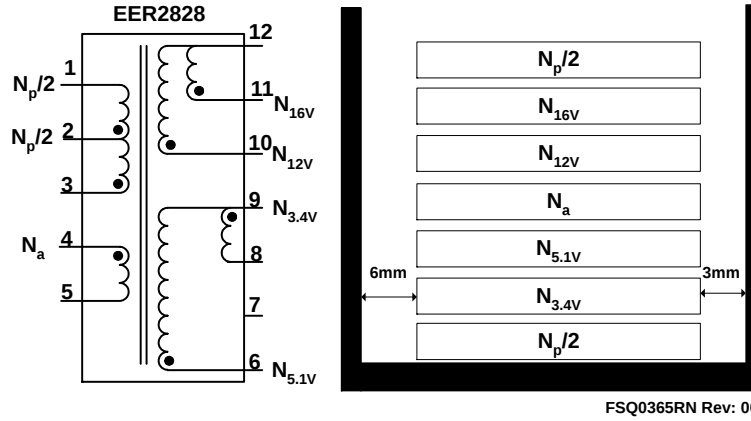


Figure 30. Transformer Schematic Diagram of FSQ0365RN

Table 6. WINDING SPECIFICATION

| No.                                              | Pin (s → f) | Wire                  | Turns | Winding Method          |
|--------------------------------------------------|-------------|-----------------------|-------|-------------------------|
| $N_p/2$                                          | 3 → H 2     | 0.25 <sup>Φ</sup> x 1 | 50    | Center Solenoid Winding |
| Insulation: Polyester Tape t = 0.050 mm, 2-Layer |             |                       |       |                         |
| $N_{3.4V}$                                       | 9 → H 8     | 0.33 <sup>Φ</sup> x 2 | 4     | Center Solenoid Winding |
| Insulation: Polyester Tape t = 0.050 mm, 2-Layer |             |                       |       |                         |
| $N_{5V}$                                         | 6 → H 9     | 0.33 <sup>Φ</sup> x 1 | 2     | Center Solenoid Winding |
| Insulation: Polyester Tape t = 0.050 mm, 2-Layer |             |                       |       |                         |
| $N_a$                                            | 4 → H 5     | 0.25 <sup>Φ</sup> x 1 | 16    | Center Solenoid Winding |
| Insulation: Polyester Tape t = 0.050 mm, 2-Layer |             |                       |       |                         |
| $N_{12V}$                                        | 10 → H 12   | 0.33 <sup>Φ</sup> x 3 | 14    | Center Solenoid Winding |
| Insulation: Polyester Tape t = 0.050 mm, 3-Layer |             |                       |       |                         |
| $N_{16V}$                                        | 11 → H 12   | 0.33 <sup>Φ</sup> x 3 | 18    | Center Solenoid Winding |
| Insulation: Polyester Tape t = 0.050 mm, 2-Layer |             |                       |       |                         |
| $N_p/2$                                          | 2 → H 1     | 0.25 <sup>Φ</sup> x 1 | 50    | Center Solenoid Winding |
| Insulation: Polyester Tape t = 0.050 mm, 2-Layer |             |                       |       |                         |

Table 7. TRANSFORMER ELECTRICAL CHARACTERISTICS

|            | Pin   | Specification | Remarks              |
|------------|-------|---------------|----------------------|
| Inductance | 1 – 3 | 1.4 mH ± 10%  | 100 kHz, 1 V         |
| Leakage    | 1 – 3 | 25 μH Maximum | Short All Other Pins |

Core & Bobbin

Core: EER2828 ( $A_e = 86.66 \text{ mm}^2$ )

Bobbin: EER2828

# FSQ0365, FSQ0265, FSQ0165, FSQ321

Table 8. EVALUATION BOARD PART LIST

| Part             | Value                        | Note                   | Part                | Value         | Note              |
|------------------|------------------------------|------------------------|---------------------|---------------|-------------------|
| <b>Resistor</b>  |                              |                        | <b>Inductor</b>     |               |                   |
| R102             | 56 k $\Omega$                | 1 W                    | L201                | 10 $\mu$ H    |                   |
| R103             | 5 $\Omega$                   | 1/2 W                  | L202                | 10 $\mu$ H    |                   |
| R104             | 12 k $\Omega$                | 1/4 W                  | L203                | 4.9 $\mu$ H   |                   |
| R105             | 100 k $\Omega$               | 1/4 W                  | L204                | 4.9 $\mu$ H   |                   |
| R106             | 6.2 k $\Omega$               | 1/4 W                  | <b>Diode</b>        |               |                   |
| R107             | 6.2 k $\Omega$               | 1/4 W                  | D101                | IN4007        |                   |
| R108             | 62 $\Omega$                  | 1 W                    | D102                | IN4004        |                   |
| R201             | 510 $\Omega$                 | 1/4 W                  | ZD101               | 1N4746A       |                   |
| R202             | 1 k $\Omega$                 | 1/4 W                  | D103                | 1N4148        |                   |
| R203             | 6.2 k $\Omega$               | 1/4 W                  | D201                | UF4003        |                   |
| R204             | 20 k $\Omega$                | 1/4 W                  | D202                | UF4003        |                   |
| R205             | 6 k $\Omega$                 | 1/4 W                  | D203                | SB360         |                   |
| <b>Capacitor</b> |                              |                        | D204                | SB360         |                   |
| C101             | 100 nF / 275 V <sub>AC</sub> | Box Capacitor          | <b>IC</b>           |               |                   |
| C102             | 100 nF / 275 V <sub>AC</sub> | Box Capacitor          | IC101               | FSQ0365RN     | Power Switch      |
| C103             | 33 $\mu$ F / 400 V           | Electrolytic Capacitor | IC201               | KA431 (TL431) | Voltage reference |
| C104             | 10 nF / 630 V                | Film Capacitor         | IC202               | FOD817A       | Opto-coupler      |
| C105             | 47 nF / 50 V                 | Mono Capacitor         | <b>Fuse</b>         |               |                   |
| C106             | 100 nF / 50 V                | SMD (1206)             | Fuse                | 2A/250V       |                   |
| C107             | 22 $\mu$ F / 50 V            | Electrolytic Capacitor | <b>NTC</b>          |               |                   |
| C110             | 33 pF / 50 V                 | Ceramic Capacitor      | RT101               | 5D-9          |                   |
| C201             | 470 $\mu$ F / 35 V           | Electrolytic Capacitor | <b>Bridge Diode</b> |               |                   |
| C202             | 470 $\mu$ F / 35 V           | Electrolytic Capacitor | BD101               | 2KBP06M2N257  | Bridge Diode      |
| C203             | 470 $\mu$ F / 35 V           | Electrolytic Capacitor | <b>Line Filter</b>  |               |                   |
| C204             | 470 $\mu$ F / 35 V           | Electrolytic Capacitor | LF101               | 40 mH         |                   |
| C205             | 1000 $\mu$ F / 10 V          | Electrolytic Capacitor | <b>Transformer</b>  |               |                   |
| C206             | 1000 $\mu$ F / 10 V          | Electrolytic Capacitor | T101                |               |                   |
| C207             | 1000 $\mu$ F / 10 V          | Electrolytic Capacitor | <b>Varistor</b>     |               |                   |
| C208             | 1000 $\mu$ F / 10 V          | Electrolytic Capacitor | TNR                 | 10D471K       |                   |
| C209             | 100 nF / 50 V                | Ceramic Capacitor      |                     |               |                   |




SENSEFET is a registered trademark of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries.



SCALE 1:1

**PDIP-8**  
**CASE 626-05**  
**ISSUE P**

DATE 22 APR 2015

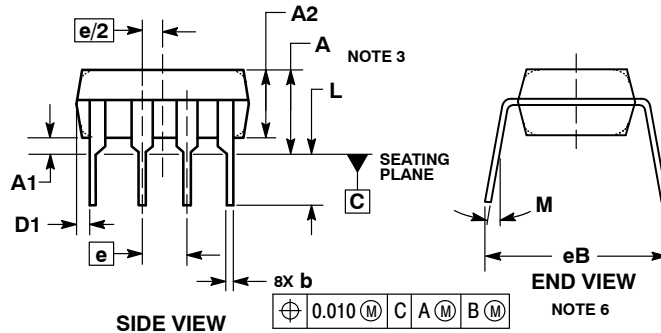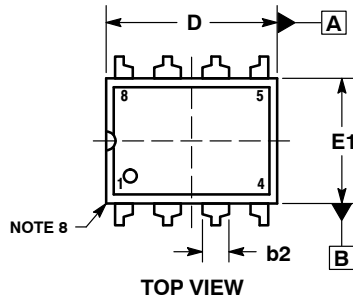


STYLE 1:  
PIN 1. AC IN  
2. DC + IN  
3. DC - IN  
4. AC IN  
5. GROUND  
6. OUTPUT  
7. AUXILIARY  
8. V<sub>CC</sub>

**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: INCHES.
3. DIMENSIONS A, A1 AND L ARE MEASURED WITH THE PACKAGE SEATED IN JEDEC SEATING PLANE GAUGE GS-3.
4. DIMENSIONS D, D1 AND E1 DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS. MOLD FLASH OR PROTRUSIONS ARE NOT TO EXCEED 0.10 INCH.
5. DIMENSION E IS MEASURED AT A POINT 0.015 BELOW DATUM PLANE H WITH THE LEADS CONSTRAINED PERPENDICULAR TO DATUM C.
6. DIMENSION eB IS MEASURED AT THE LEAD TIPS WITH THE LEADS UNCONSTRAINED.
7. DATUM PLANE H IS COINCIDENT WITH THE BOTTOM OF THE LEADS, WHERE THE LEADS EXIT THE BODY.
8. PACKAGE CONTOUR IS OPTIONAL (ROUNDED OR SQUARE CORNERS).

|     | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
| DIM | MIN       | MAX   | MIN         | MAX   |
| A   | ---       | 0.210 | ---         | 5.33  |
| A1  | 0.015     | ---   | 0.38        | ---   |
| A2  | 0.115     | 0.195 | 2.92        | 4.95  |
| b   | 0.014     | 0.022 | 0.35        | 0.56  |
| b2  | 0.060 TYP | ---   | 1.52 TYP    | ---   |
| C   | 0.008     | 0.014 | 0.20        | 0.36  |
| D   | 0.355     | 0.400 | 9.02        | 10.16 |
| D1  | 0.005     | ---   | 0.13        | ---   |
| E   | 0.300     | 0.325 | 7.62        | 8.26  |
| E1  | 0.240     | 0.280 | 6.10        | 7.11  |
| e   | 0.100 BSC | ---   | 2.54 BSC    | ---   |
| eB  | ---       | 0.430 | ---         | 10.92 |
| L   | 0.115     | 0.150 | 2.92        | 3.81  |
| M   | ---       | 10°   | ---         | 10°   |

**GENERIC  
MARKING DIAGRAM\***



XXXX = Specific Device Code  
A = Assembly Location  
WL = Wafer Lot  
YY = Year  
WW = Work Week  
G = Pb-Free Package


\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

|                         |                    |                                                                                                                                                                                     |
|-------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB42420B</b> | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>PDIP-8</b>      | <b>PAGE 1 OF 1</b>                                                                                                                                                                  |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**PDIP8 GW**  
**CASE 709AJ**  
**ISSUE O**

DATE 31 JAN 2017

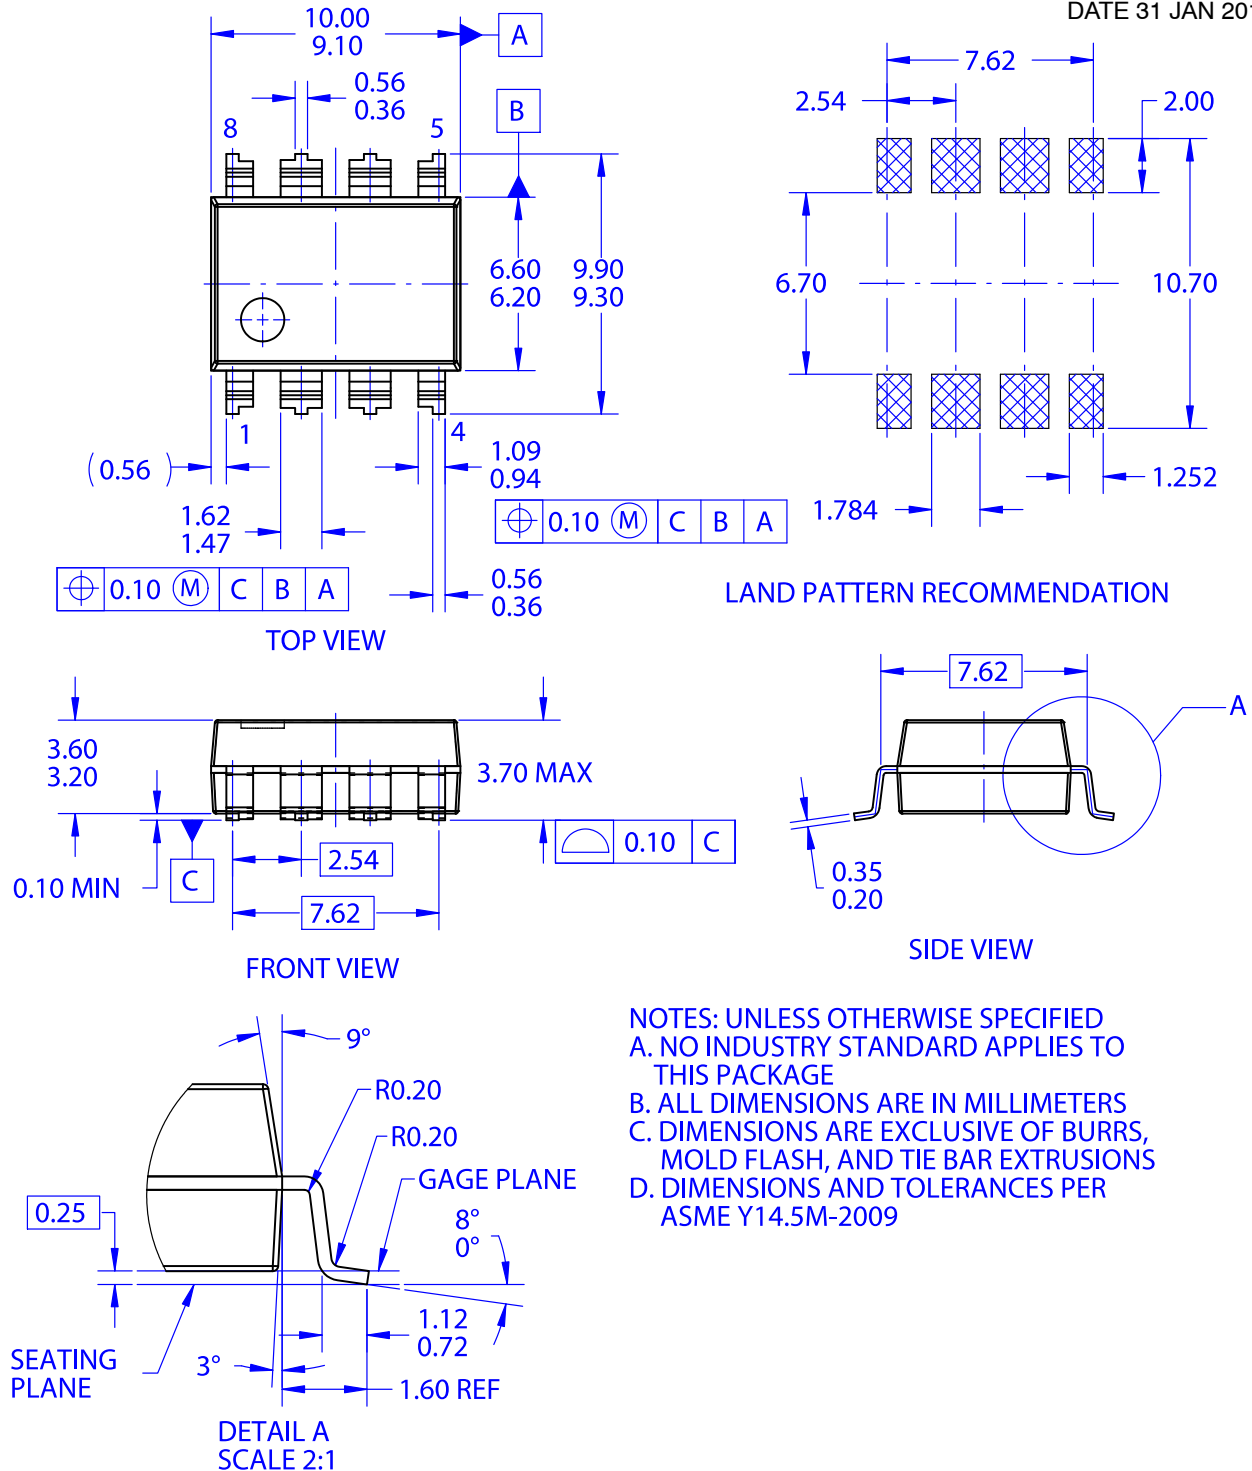

|                         |                    |                                                                                                                                                                                     |
|-------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON13756G</b> | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>PDIP8 GW</b>    | <b>PAGE 1 OF 1</b>                                                                                                                                                                  |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)