
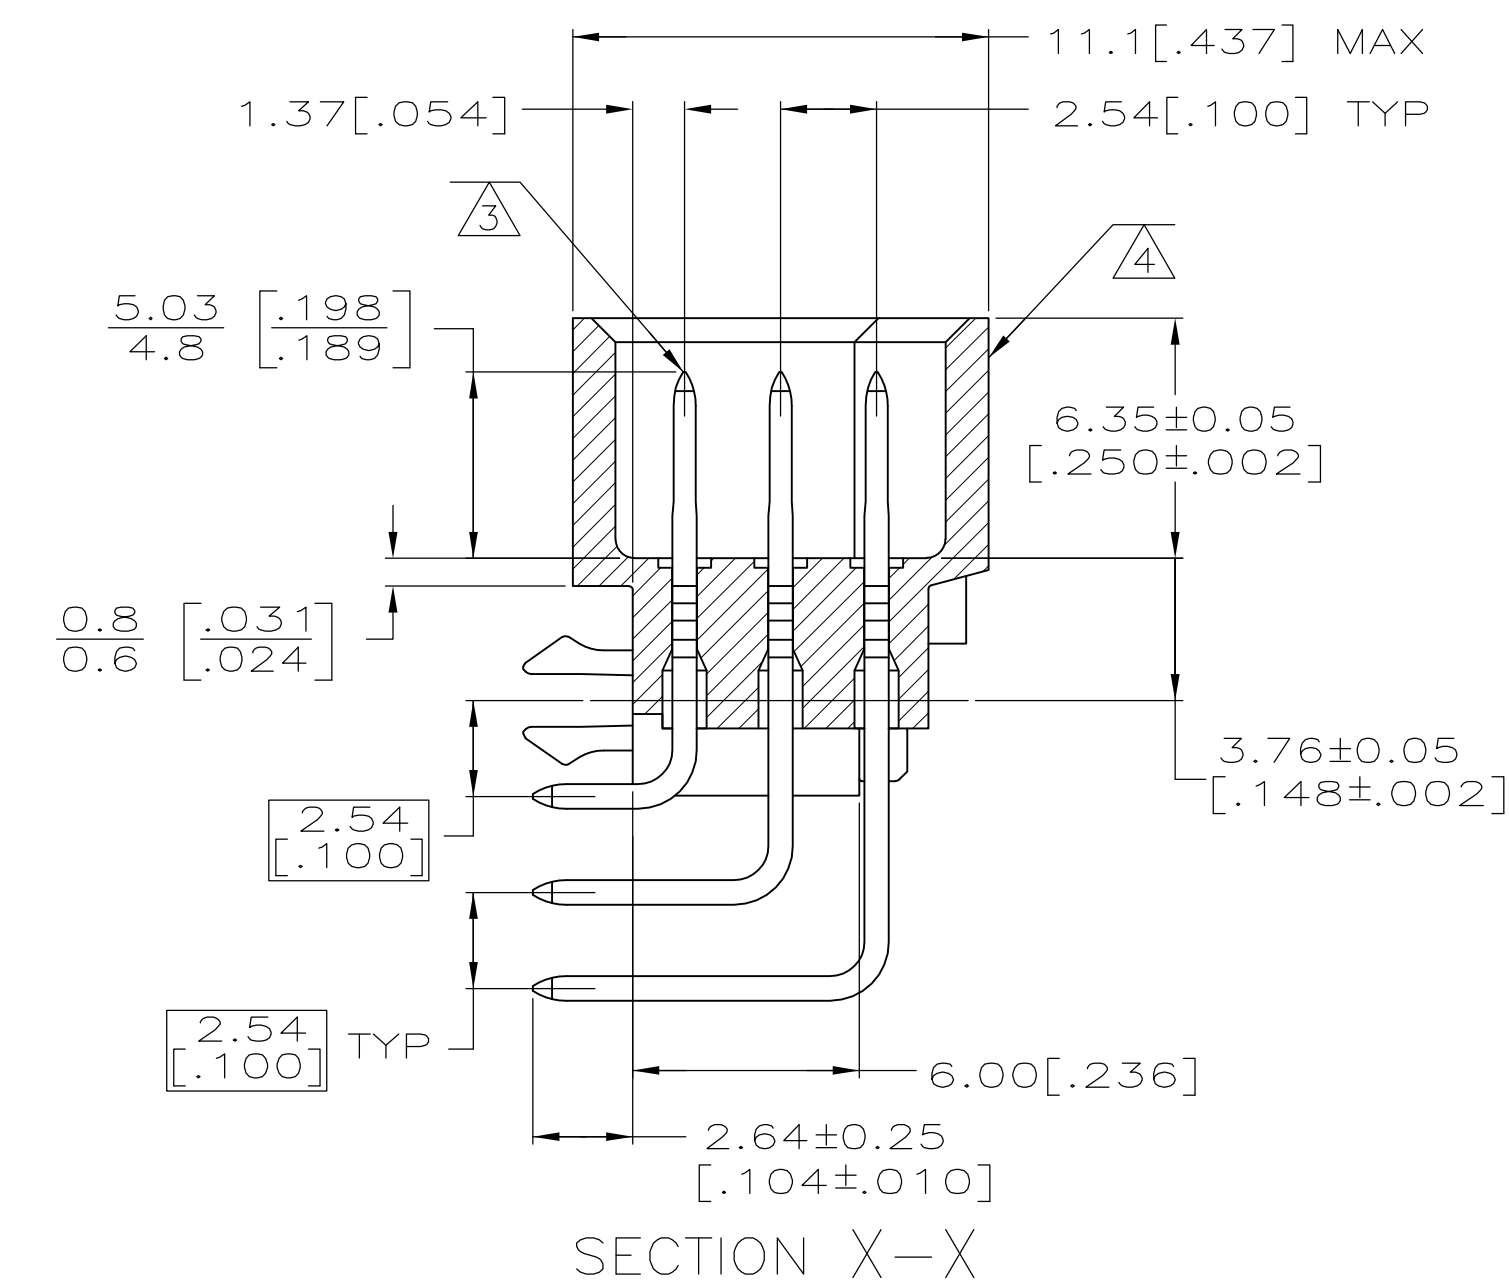




The diagram illustrates the PC board layout with various dimensions and tolerances:

- Overall Dimensions:**
 - Total length: 134.62
 - Distance from left edge to first hole center: 5.08
 - Distance between hole centers: 2.54 (49 SPACES AT)
 - Distance from last hole center to right edge: 5.300
- Hole Patterns:**
 - Left side: 7 holes in a single row.
 - Middle section: 2 rows of 12 holes each, separated by a break symbol.
 - Right side: 7 holes in a single row.
- Mounting Holes:**
 - Top mounting hole: Diameter $\phi 2.79 \pm 0.1$, Position TYP $.110 \pm .004$.
 - Bottom mounting hole: Diameter $\phi 1 \pm 0.08$, Position TYP $.039 \pm .003$.
- Other Dimensions:**
 - Distance from left edge to top mounting hole center: 2.54
 - Distance from left edge to bottom mounting hole center: 5.41 (TYP) / 5.21
 - Distance from left edge to first hole center: .200
 - Distance from last hole center to right edge: .100
 - Distance from last hole center to right mounting hole center: 2.54
 - Distance from right mounting hole center to right edge: .100
- Labels:**
 - POSITION A-50
 - PC BOARD REFERENCE
- Notes:**
 - RECOMMENDED PC BOARD THICKNESS 1.57 [.062]

1-50	X	X	X	150	5650915-5
POSITIONS LOADED	C	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER
	ROWS LOADED				

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN J. POLIGNONE		OSMAYOS		 TE Connectivity			
DIMENSIONS: mm [INCHES]		DRAWN A. SHARPE		OSMAYOS					
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROVED A. SHARPE		OSMAYOS		NAME ASSEMBLY, PIN, EUROCARD, TYPE C, 150 POSITION, 2.64[.104] SOLDER POST, WITH BOARD LOCKS		
	0 PLC ± -		PRODUCT SPEC		—				
	1 PLC ± 0.13[.005]		APPLICATION SPEC		—				
	3 PLC ± -		—		—				
4 PLC ANGLES ± -		—		—		—			
MATERIAL	FINISH		WEIGHT		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
			—		A1		00779	C=5650915	
CUSTOMER DRAWING				SCALE		SHEET		1 OF 1	REV A