

Socket

Header


Compliance with RoHS Directive

FEATURES

1. Ultra-small 0.35-mm pitch contributes to downsizing of equipment.

Socket compared to P4S already on the market: 11%

Header: Space-saving of 12%
(Comparison using a 20-pin connector)

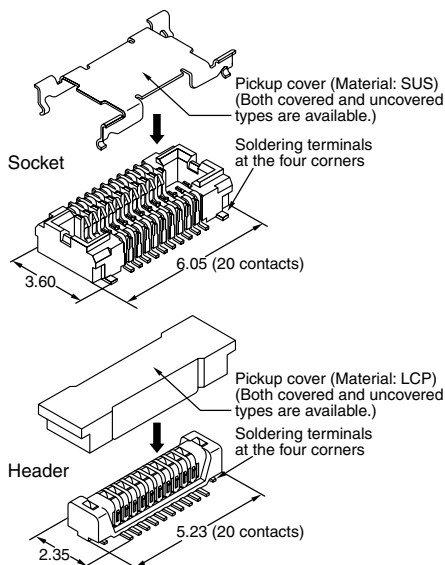


2. Strong resistance to adverse environments! Utilizes **"TOUGH CONTACT"** construction for high contact reliability.
(See Page 6 for details of the structure)

Note: If extra resistance to drop impact is required, we recommend using our P4 series.

3. Greater flexibility in connector placement.

Pattern wiring to the connector bottom is possible because the undersurface of the connector is constructed with a molded covering.

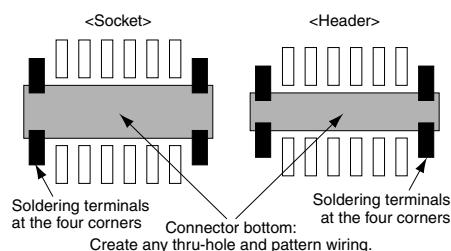


4. Automatic mounting inspection is facilitated by the gull-wing terminal shape which makes mounting verification easy.

5. Connectors for inspection available
Connectors are available that are ideal for inspection in module unit inspection and device assembly processes.

APPLICATIONS

Compact portable devices "Cellular phones, DVC, Digital cameras, etc"

Ideal for Board-to-FPC connections

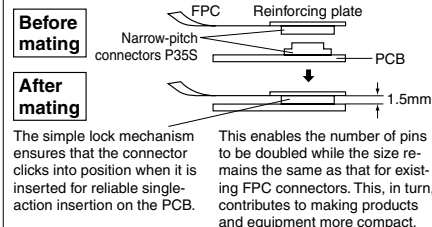

ORDERING INFORMATION

AXT 1 4

1: Narrow Pitch Connector P35S (0.35 mm pitch) Socket
2: Narrow Pitch Connector P35S (0.35 mm pitch) Header

Number of contacts (2 digits)

Mated height

<Socket>/<Header>

1: For mated height 1.5 mm

Functions

<Socket>/<Header>

2: No pickup cover, without positioning bosses

6: With pickup cover, without positioning bosses

Surface treatment (Contact portion / Terminal portion)

<Socket>

4: Ni plating on base, Au plating on surface (for Ni barrier available)

<Header>

4: Ni plating on base, Au plating on surface

PRODUCT TYPES TOUGH CONTACT

Mated height	Number of contacts	Part number		Packing	
		Socket	Header	Inner carton	Outer carton
1.5mm	20	AXT120124	AXT220124	3,000 pieces	6,000 pieces
	22	AXT122124	AXT222124		
	24	AXT124124	AXT224124		
	26	AXT126124	AXT226124		
	28	AXT128124	AXT228124		
	30	AXT130124	AXT230124		
	32	AXT132124	AXT232124		
	34	AXT134124	AXT234124		
	36	AXT136124	AXT236124		
	38	AXT138124	AXT238124		
	40	AXT140124	AXT240124		
	50	AXT150124	AXT250124		
	52	AXT152124	AXT252124		
	60	AXT160124	AXT260124		
	70	AXT170124	AXT270124		
	80	AXT180124	AXT280124		
	90	AXT190124	AXT290124		
	100	AXT100124	AXT200124		

Notes: 1. Regarding ordering units; During production: Please make orders in 1-reel units.

Samples for mounting confirmation: Available in units of 50 pieces. Please consult us.

Samples: Small lot orders are possible. Please consult us.

2. If you require the pickup cover, change the eighth digit of the part number from "2" to "6" in your order. Note that the pickup cover is not available for some types depending on the number of contacts. Check the latest product specifications.

3. The above part numbers are for connectors without positioning bosses, which are standard. When ordering connectors with positioning bosses, please contact our sales office.

4. Connectors of different number of contacts are available on-demand production only. Please contact us for more details.

SPECIFICATIONS

1. Characteristics

Item		Specifications	Conditions
Electrical characteristics	Rated current	0.25A/contact (Max. 4 A at total contacts)	—
	Rated voltage	60V AC/DC	—
	Breakdown voltage	150V AC for 1 min.	Rated voltage is applied for one minute and check for short circuit or damage with a detection current of 1mA.
	Insulation resistance	Min. 1,000MΩ (initial)	Using 250V DC megger (applied for 1 min.)
	Contact resistance	Max. 100mΩ	Based on the contact resistance measurement method specified by JIS C 5402.
Environmental characteristics	Ambient temperature	−55°C to +85°C	No freezing at low temperatures
	Soldering heat resistance	Max. peak temperature of 260°C (on the surface of the PC board around the connector terminals) 300°C within 5 sec. or 350°C within 3 sec.	Infrared reflow soldering Soldering iron
	Storage temperature	−55°C to +85°C (product only) −40°C to +50°C (emboss packing)	No freezing at low temperatures
	Thermal shock resistance (header and socket mated)	5 cycles, insulation resistance min. 100MΩ, contact resistance max. 100mΩ	Sequence 1. −55 $\frac{3}{4}$ °C, 30 minutes 2. ~, Max. 5 minutes 3. 85 $\frac{3}{4}$ °C, 30 minutes 4. ~, Max. 5 minutes
	Humidity resistance (header and socket mated)	120 hours, insulation resistance min. 100MΩ, contact resistance max. 100mΩ	Temperature 40±2°C, humidity 90 to 95% R.H.
	Saltwater spray resistance (header and socket mated)	24 hours, insulation resistance min. 100MΩ, contact resistance max. 100mΩ	Temperature 35±2°C, saltwater concentration 5±1%
	H ₂ S resistance (header and socket mated)	48 hours, contact resistance max. 100mΩ	Temperature 40±2°C, gas concentration 3±1 ppm, humidity 75 to 80% R.H.
Lifetime characteristics	Insertion and removal life	50 times	Repeated insertion and removal speed of max. 200 times/hours

2. Material and surface treatment

Part name	Material	Surface treatment
Molded portion	LCP resin (UL94V-0)	—
Contact and Post	Copper alloy	Contact portion: Ni plating on base, Au plating on surface Terminal portion: Ni plating on base, Au plating on surface (Except for front edge of terminal) However, the area adjacent to the socket terminal is exposed to Ni on base. Soldering terminal portion; Socket: Ni plating on base, Pd + Au flash plating on surface (Expect for front edge of terminal) Header: Ni plating on base, Au plating on surface (Expect for front edge of terminal)

AXT1, 2


DIMENSIONS (Unit: mm)

The CAD data of the products with a **CAD Data** mark can be downloaded from: <http://panasonic-electric-works.net/ac>

1. Socket (Mated height: 1.5mm)

- Without pickup cover

CAD Data

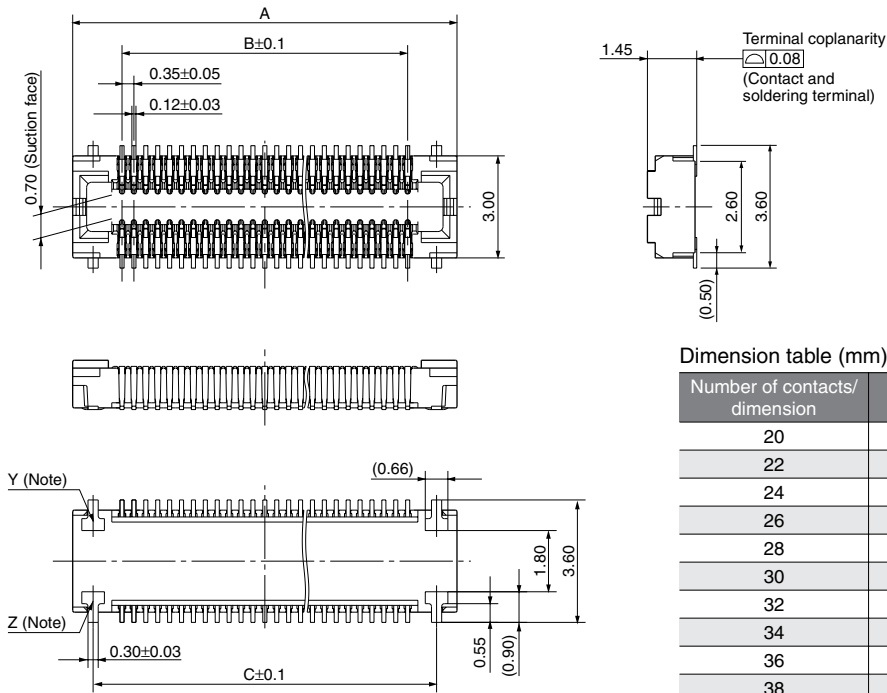


General tolerance: ±0.2

Dimension table (mm)

Number of contacts/ dimension	A	B	C
20	6.05	3.15	4.85
22	6.40	3.50	5.20
24	6.75	3.85	5.55
26	7.10	4.20	5.90
28	7.45	4.55	6.25
30	7.80	4.90	6.60
32	8.15	5.25	6.95
34	8.50	5.60	7.30
36	8.85	5.95	7.65
38	9.20	6.30	8.00
40	9.55	6.65	8.35
50	11.30	8.40	10.10
52	11.65	8.75	10.45
60	13.05	10.15	11.85
70	14.80	11.90	13.60
80	16.55	13.65	15.35
90	18.30	15.40	17.10
100	20.05	17.15	18.85

- With pickup cover

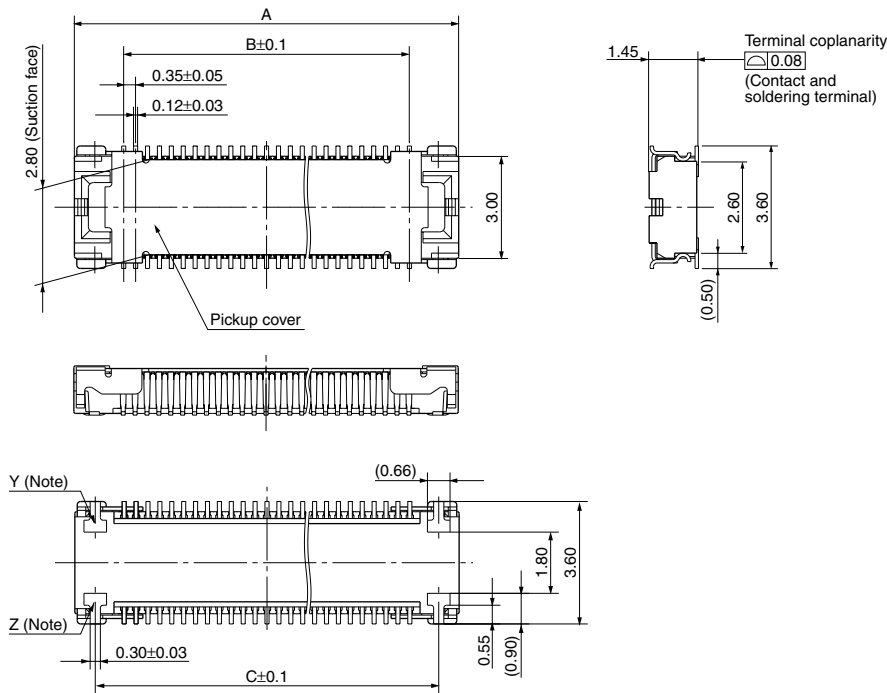


General tolerance: ±0.2

Note: Since soldering terminals are built into the body, the Y and Z parts are connected electrically.

2. Header (Mated height: 1.5mm)

- Without pickup cover


CAD Data

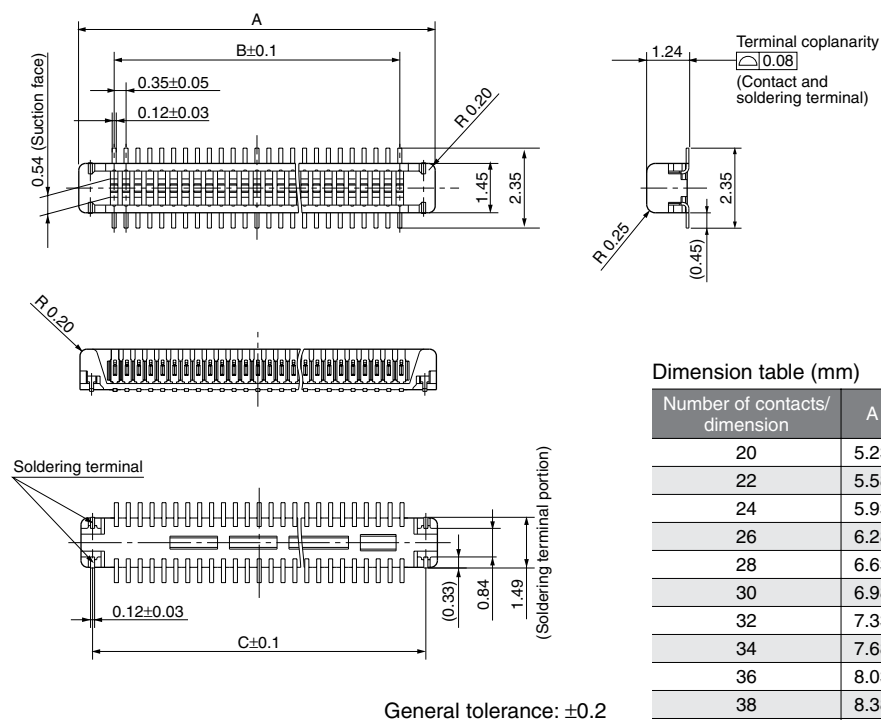

Dimension table (mm)


Number of contacts/ dimension	A	B	C	C
20	5.23	3.15	4.55	6.73
22	5.58	3.50	4.90	7.08
24	5.93	3.85	5.25	7.43
26	6.28	4.20	5.60	7.78
28	6.63	4.55	5.95	8.13
30	6.98	4.90	6.30	8.48
32	7.33	5.25	6.65	8.83
34	7.68	5.60	7.00	9.18
36	8.03	5.95	7.35	9.53
38	8.38	6.30	7.70	9.88
40	8.73	6.65	8.05	10.23
50	10.48	8.40	9.80	11.98
52	10.83	8.75	10.15	—
60	12.23	10.15	11.55	13.73
70	13.98	11.90	13.30	15.48
80	15.73	13.65	15.05	17.23
90	17.48	15.40	16.80	19.98
100	19.23	17.15	18.55	20.73

- With pickup cover

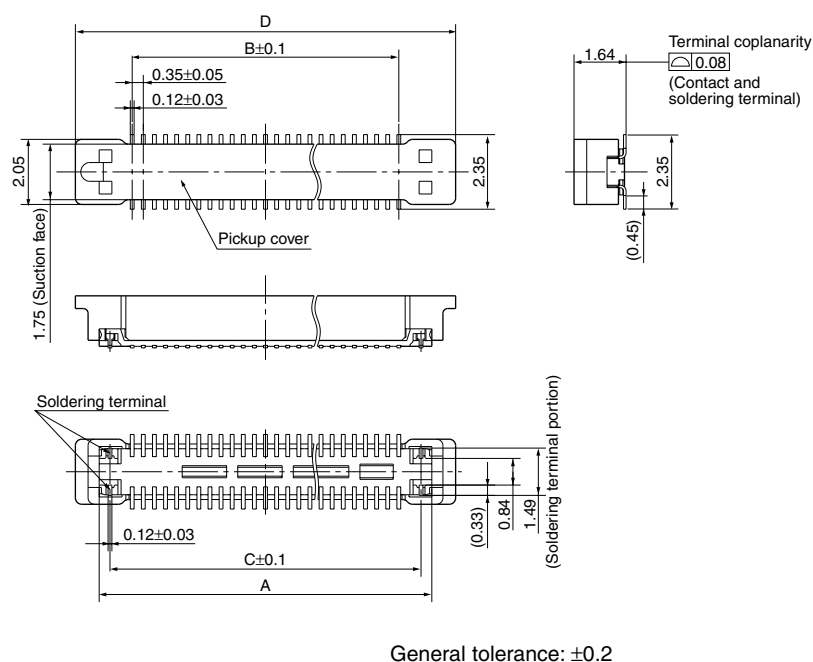


AXT1, 2

Socket and Header are mated



EMBOSSED TAPE DIMENSIONS (unit: mm, Common for respective contact type, socket and header)

- Tape dimensions (Conforming to JIS C 0806-1990. However, some tapes have mounting hole pitches that do not comply with the standard.)
- Plastic reel dimensions (Conforming to EIAJ ET-7200B)

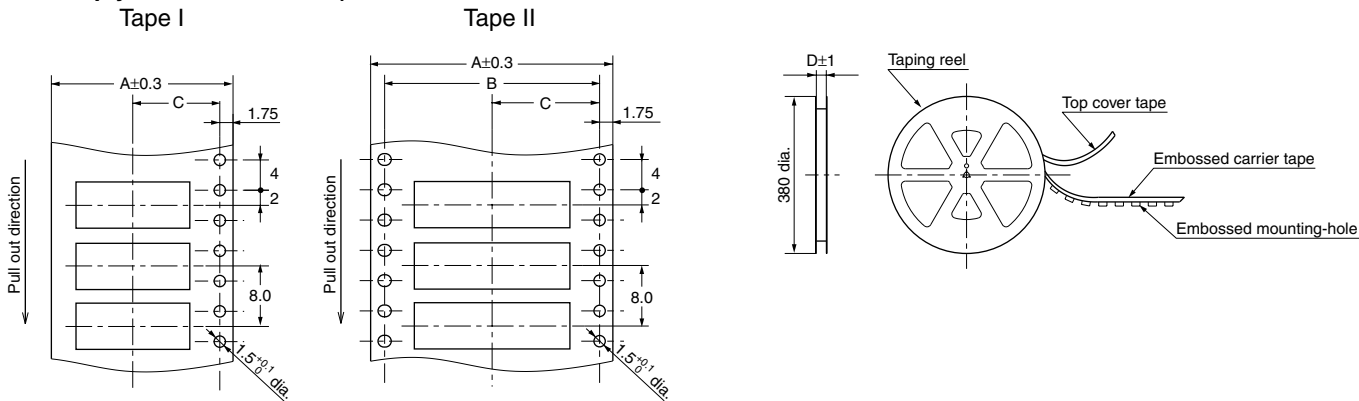


Dimension table (mm)

Mated height	Number of contacts	Type of taping	A	B	C	D	Quantity per reel
Common for socket and header: 1.5mm	Max. 24	Tape I	16.0	—	7.5	17.4	3,000
	26 to 70	Tape I	24.0	—	11.5	25.4	3,000
	72 to 100	Tape II	32.0	28.4	14.2	33.4	3,000

Connector orientation with respect to direction of progress of embossed tape

Type	Common for P35S	
Direction of tape progress	Socket	Header

Note: There is no indication on this product regarding top-bottom or left-right orientation.

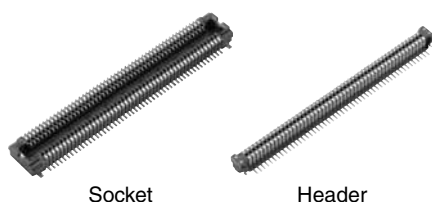

Compliance with RoHS Directive

FEATURES

1. 3,000 insertion and removals (when as recommended)

From the 50 insertion and removals of standard type, up to 3,000 insertion and removals (with recommended insertion and removal) are possible for use in inspection.

Ideal for inspection of module units and inspection during the device assembly process

2. Same external dimensions and foot pattern as mated height 1.5mm standard type.

Since shape is the same as mated height 1.5mm standard type, inspection is possible without interfering with devices in the vicinity of standard connectors.

3. Improved mating

Insertion and removal have become easier due to a reduction in the mating retention force required by the simple locking structure and also in the amount of force needed for insertion and removal. (We cannot warrant anything regarding mating retention.)

TABLE OF PRODUCT TYPES

☆: Available for sale

Product name	P35S for inspection
20	☆
22	☆
24	☆
26	☆
28	☆
30	☆
32	☆
34	☆
36	☆
38	☆
40	☆
50	☆
52	☆
60	☆
70	☆
80	☆
90	☆
100	☆

Number of contacts

Notes:

1. The pickup surface shape of the inspection sockets is different from that of the standard sockets. (For details, refer to the product specification diagram.)
2. Please inquire numbers of contacts other than those listed above.
3. Please inquire us regarding delivery times.
4. Please keep ordering unit no less than 50 pieces per lot.
5. Please inquire for further information.

PRODUCT TYPES


Specifications			Part No.	Specifications			Part No.
Socket	With pickup cover	Without positioning bosses	AXT1E**66	Header	With pickup cover	Without positioning bosses	AXT2E**66
	No pickup cover	Without positioning bosses	AXT1E**26		No pickup cover	Without positioning bosses	AXT2E**26

Notes: 1. When placing an order, substitute the "*" (asterisk) in the above part number with the number of contacts for the required connector.


2. The above part numbers are for connectors without positioning bosses, which are standard. When ordering connectors with positioning bosses, please contact our sales office.

NOTES

1. As shown below, excess force during insertion may result in damage to the connector or removal of the solder. Please be careful. Also, to prevent connector damage please confirm the correct position before mating connectors.

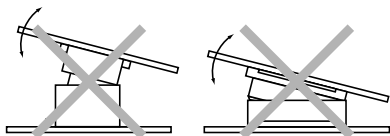

2. Keep the PC board warp no more than 0.03 mm in relation to the overall length of the connector

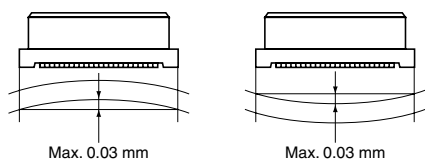

3. If extra resistance to shock caused by dropping is required, we recommend using our previous P4 Series.

4. PC Boards and Recommended Metal Mask Patterns


Connectors are mounted with high density, with a pitch interval of 0.35 mm, 0.4 mm or 0.5 mm.

In order to reduce solder bridge and other issues make sure the proper levels of solder are used.

The figures to the right are recommended metal mask patterns. Please use them as a reference.


Socket (Mated height: 1.5mm)

Recommended PC board pattern
(TOP VIEW)

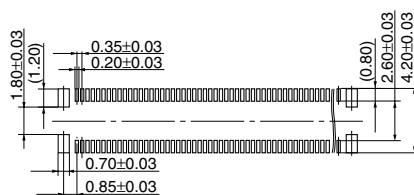


Recommended metal mask pattern

Metal mask thickness: Here, 120 μm
(Terminal portion opening area ratio: 60%)
(Metal portion opening area ratio: 100%)

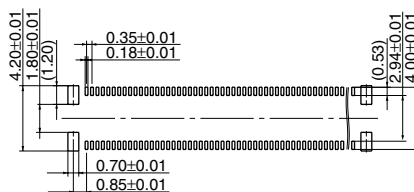


Header (Mated height: 1.5mm)

Recommended PC board pattern
(TOP VIEW)

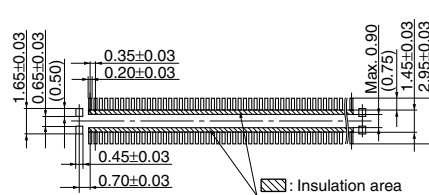

Recommended metal mask pattern

Metal mask thickness: Here, 120 μm
(Terminal portion opening area ratio: 60%)
(Metal portion opening area ratio: 100%)

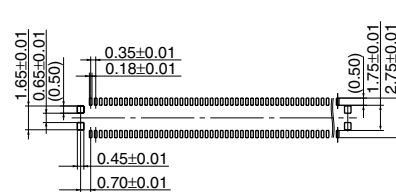

For other details, please verify with the product specification sheets.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

AXT2E2826	AXT100114	AXT100124	AXT100154	AXT100164	AXT120114	AXT120124	AXT120154	AXT120164
AXT122114	AXT122124	AXT122154	AXT122164	AXT124114	AXT124124	AXT124154	AXT124164	AXT126114
AXT126124	AXT126154	AXT126164	AXT130114	AXT130124	AXT130154	AXT130164	AXT132114	AXT132124
AXT132154	AXT132164	AXT134114	AXT134124	AXT134154	AXT134164	AXT136114	AXT136124	AXT136154
AXT136164	AXT138114	AXT138124	AXT138154	AXT138164	AXT140114	AXT140124	AXT140154	AXT140164
AXT150114	AXT150124	AXT150154	AXT150164	AXT152114	AXT152124	AXT152154	AXT152164	AXT160114
AXT160124	AXT160154	AXT160164	AXT170114	AXT170124	AXT170154	AXT170164	AXT180114	AXT180124
AXT180154	AXT180164	AXT190114	AXT190124	AXT190154	AXT190164	AXT200114	AXT200124	AXT200154
AXT200164	AXT220114	AXT220124	AXT220154	AXT220164	AXT222114	AXT222124	AXT222154	AXT222164
AXT224114	AXT224124	AXT224154	AXT224164	AXT226114	AXT226124	AXT226154	AXT226164	AXT230114
AXT230124	AXT230154	AXT230164	AXT232114	AXT232124	AXT232154	AXT232164	AXT234114	AXT234124
AXT234154								