
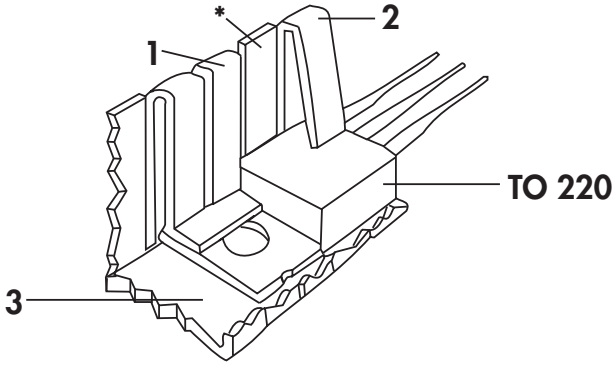










Attachable heatsinks



- narrow version with better thermal resistance
- max. 14.5 mm wide
- 3 different lengths for varied dissipation power
- takes less space than any other attachable heatsink
- simple assembly by pushing the heatsink onto the TO 220 housing
- the cooling fingers form spring clamps **(1+2)**, which pushes the TO 220 and it's mounting flange onto the heatsink **(3)**
- optimum heat transfer due the constant pressure on the entire contact surface of the TO 220 cases
- effective heat emmision with horizontal and vertical mounting
- * = touch in edge of transistor

art. no.				
				
FK 242 SA 220 O	without soldering lug			
				
FK 237 SA 220 O	without soldering lug			
				
FK 240 SA 220 O	without soldering lug			
material:	aluminium			
surface:	black anodised, solder pins tin plated			