



2008

RELEASED FOR PUBLICATION

THIS DRAWING IS UNPUBLISHED.


BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
			BB	CHANGE OF MARKING METHOD TO LASER MARKING	27SEP2010	PT	St.P

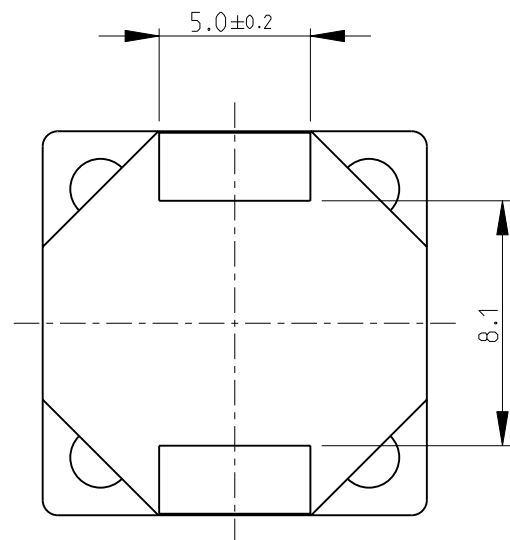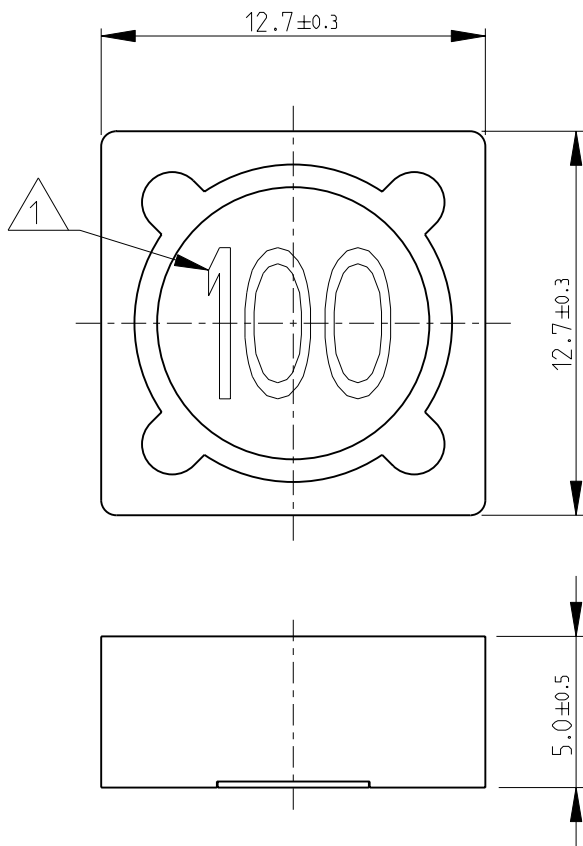


- 1 INDUCTANCE CODE
2 FOR FURTHER INFORMATION SEE DATA SHEET FOR 3631 SERIES-SHIELDED SMD POWER INDUCTORS

RECOMMENDED LAND PATTERN

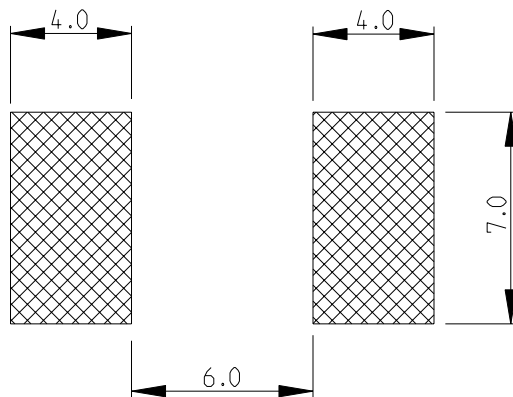


RoHS Compliant

SERIES 3631A AS SHOWN



SCALE 2:1

DIMENSIONS: mm	DWN SUBHASH.M	14-NOV-08	MATERIAL	-	FINISH	-
	CHK PRAKASH.S	14-NOV-08	 Tyco Electronics Tyco Electronics Corporation Dorcan, Swindon, SN3 5HH			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.2 1 PLC ±0.1 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±5°	APVD STEPHEN.P	14-NOV-08				
	PRODUCT SPEC	-	NAME SHIELDED SMD POWER INDUCTOR SERIES 3631A			
	APPLICATION SPEC	-	SIZE	A 4	CAGE CODE	C= 1676942
	WEIGHT	-	DRAWING NO	RESTRICTED TO		
CUSTOMER DRAWING			SCALE	4:1	SHEET	1 OF 1
			REV BB			