

# Micro-Power Voltage Detectors with Manual Reset

## General Description

The RT9817 is a micro-power voltage detector with deglitched manual reset input supervising the power supply voltage level for microprocessors ( $\mu$ P) or digital systems. It provides internally fixed threshold levels with 0.1V per step ranging from 1.2V to 5V, which covers most digital applications. It features low supply current of 3 $\mu$ A. The RT9817 performs supervisory function by sending out a reset signal whenever the  $V_{DD}$  voltage falls below a preset threshold level. This reset signal will last the whole period before  $V_{DD}$  recovering. Once  $V_{DD}$  recovered upcrossing the threshold level, the reset signal will be released after a certain delay time. To pull reset signal low manually, just pull the manual reset input (MR) below the specified  $V_{IL}$  level. RT9817 is provided in SC-82 and SOT-143 packages.

## Ordering Information

|        |                                      |   |   |   |
|--------|--------------------------------------|---|---|---|
| RT9817 | □                                    | □ | □ | □ |
|        | Package Type                         |   |   |   |
|        | H : SOT-143                          |   |   |   |
|        | Y : SC-82                            |   |   |   |
|        | Lead Plating System                  |   |   |   |
|        | P : Pb Free                          |   |   |   |
|        | G : Green (Halogen Free and Pb Free) |   |   |   |
|        | Threshold Voltage                    |   |   |   |
|        | 12 : 1.2V                            |   |   |   |
|        | 13 : 1.3V                            |   |   |   |
|        | ...                                  |   |   |   |
|        | 49 : 4.9V                            |   |   |   |
|        | 50 : 5.0V                            |   |   |   |
|        | Reset Active Timeout Period          |   |   |   |
|        | A = 0ms (RESET)                      |   |   |   |
|        | B = 55ms (RESET)                     |   |   |   |
|        | C = 220ms (RESET)                    |   |   |   |
|        | D = 450ms (RESET)                    |   |   |   |
|        | E = 0ms (RESET)                      |   |   |   |
|        | F = 55ms (RESET)                     |   |   |   |
|        | G = 220ms (RESET)                    |   |   |   |
|        | H = 450ms (RESET)                    |   |   |   |

Note :

Richtek products are :

- ▶ RoHS compliant and compatible with the current requirements of IPC/JEDEC J-STD-020.
- ▶ Suitable for use in SnPb or Pb-free soldering processes.


## Features

- Internally Fixed Threshold 1.2V to 5V in 0.1V Step
- High Accuracy  $\pm 1.5\%$
- Low Supply Current 3 $\mu$ A
- No External Components Required
- Quick Reset within 20 $\mu$ s
- Built-in Recovery Delay Include 0ms, 55ms, 220ms, 450ms Options
- 800ns Glitch Immunity of Manual Reset Input
- Low Functional Supply Voltage 0.9V
- CMOS Push-Pull Output
- Small SC-82 and SOT-143 Packages
- RoHS Compliant and 100% Lead (Pb)-Free

## Applications

- Computers
- Controllers
- Intelligent Instruments
- Critical  $\mu$ P and  $\mu$ C Power Monitoring
- Portable/Battery-Powered Equipment


## Pin Configurations

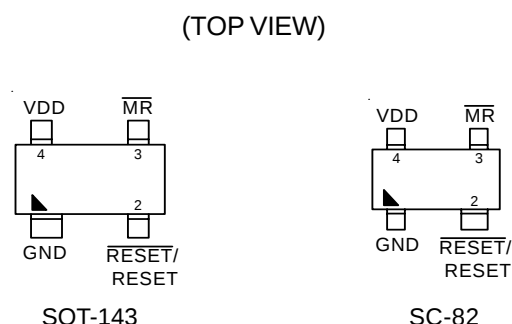

## Marking Information

For marking information, contact our sales representative directly or through a RichTek distributor located in your area, otherwise visit our website for detail.


## Typical Application Circuit

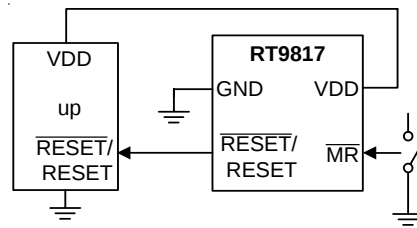

## Functional Pin Description

| Pin Name                  | Pin Function                       |
|---------------------------|------------------------------------|
| GND                       | Ground Pin                         |
| $\overline{\text{RESET}}$ | Active Low Push-Pull Reset Output  |
| RESET                     | Active High Push-Pull Reset Output |
| $\overline{\text{MR}}$    | Manual Reset                       |
| VDD                       | Power Pin                          |

## Function Block Diagram

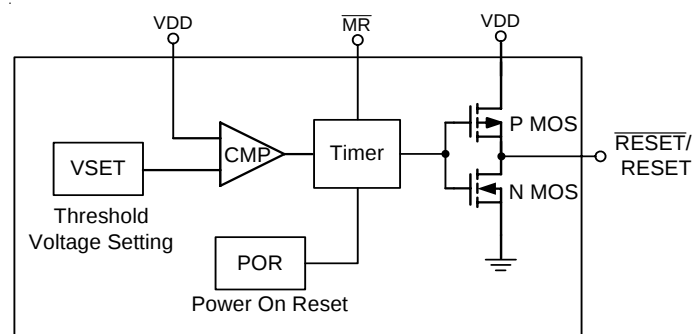

## Absolute Maximum Ratings (Note 1)

- Terminal Voltage (with Respect to GND)  
 $V_{DD}$  ----- -0.3V to 6.0V
- All Other Inputs ----- -0.3V to  $V_{DD}+0.3V$
- Input Current,  $I_{VDD}$  ----- 20mA
- Power Dissipation, PD @  $T_A = 25^\circ C$   
     SC-82 ----- 0.25W  
     SOT-143 ----- 0.285W
- Package Thermal Resistance (Note 2)  
     SC-82,  $\theta_{JA}$  -----  $400^\circ C$   
     SOT-143,  $\theta_{JA}$  -----  $350^\circ C$
- Lead Temperature (Soldering, 10sec.) -----  $260^\circ C$
- Storage Temperature Range -----  $-65^\circ C$  to  $125^\circ C$
- ESD Susceptibility (Note 3)  
     HBM (Human Body Mode) ----- 2kV  
     MM (Machine Mode) ----- 200V

## Recommended Operating Conditions (Note 4)

- Junction Temperature Range -----  $-40^\circ C$  to  $125^\circ C$
- Ambient Temperature Range -----  $-40^\circ C$  to  $85^\circ C$

## Electrical Characteristics

( $V_{DD} = 3V$ ,  $T_A = 25^\circ C$ , unless otherwise specified)

| Parameter                              |           | Symbol          | Test Conditions                                                  | Min  | Typ           | Max  | Unit    |
|----------------------------------------|-----------|-----------------|------------------------------------------------------------------|------|---------------|------|---------|
| Operating $V_{DD}$ ( $V_{OUT}$ ) Range |           | $V_{DD}$        | RT9817A/B/C/D                                                    | 0.9  | --            | 6    | V       |
|                                        |           |                 | RT9817E/F/G/H                                                    | 1.1  | --            | 6    |         |
| Supply Current                         |           | $I_{DD}$        | $V_{TH} = 3V$ , $V_{DD} = 4.5V$                                  | --   | 3             | 8    | $\mu A$ |
| Reset Threshold                        |           | $V_{TH}$        |                                                                  | --   | 1.2 to 5.0    | --   | V       |
| Threshold Voltage Accuracy             |           | $\Delta V_{TH}$ |                                                                  | -1.5 | --            | +1.5 | %       |
| Threshold Voltage Hysteresis           |           | $V_{HYS}$       |                                                                  | --   | $0.01 V_{TH}$ | --   | V       |
| $V_{DD}$ Drop to Reset Delay           |           | $t_{RD}$        | Drop = $V_{TH} - 125mV$                                          | --   | 20            | --   | $\mu s$ |
| Reset Active Time Out Period           | RT9817A/E | $t_{RP}$        | $V_{DD} \geq 1.02 \times V_{TH}$                                 | --   | 0             | --   | ms      |
|                                        | RT9817B/F |                 |                                                                  | 35   | 55            | 75   | ms      |
|                                        | RT9817C/G |                 |                                                                  | 143  | 220           | 297  | ms      |
|                                        | RT9817D/H |                 |                                                                  | 292  | 450           | 608  | ms      |
| RESET Output Voltage Low               |           | $V_{OL}$        | $V_{DD} < V_{TH(MIN)}$ , $I_{SINK} = 3.5mA$ , $V_{TH} \geq 3V$   | --   | --            | 0.4  | V       |
|                                        |           |                 | $V_{DD} < V_{TH(MIN)}$ , $I_{SINK} = 1.2mA$ , $V_{TH} \geq 1.8V$ | --   | --            | 0.3  |         |
|                                        |           |                 | $V_{TH(MIN)} > V_{DD} > 1V$ , $I_{SINK} = 0.5mA$                 | --   | --            | 0.3  |         |

*To be continued*

| Parameter                 | Symbol          | Test Conditions                                                                                 | Min                  | Typ | Max | Unit |
|---------------------------|-----------------|-------------------------------------------------------------------------------------------------|----------------------|-----|-----|------|
| RESET Output Voltage High | V <sub>OH</sub> | V <sub>DD</sub> > V <sub>TH(MAX)</sub> ,<br>I <sub>SOURCE</sub> = 800μA, V <sub>TH</sub> ≥ 3V   | V <sub>DD</sub> -1.5 | --  | --  | V    |
|                           |                 | V <sub>DD</sub> > V <sub>TH(MAX)</sub> ,<br>I <sub>SOURCE</sub> = 500μA, V <sub>TH</sub> ≥ 1.8V | 0.8 V <sub>DD</sub>  | --  | --  |      |
|                           |                 | V <sub>DD</sub> > V <sub>TH(MAX)</sub> ,<br>I <sub>SOURCE</sub> = 200μA, V <sub>TH</sub> ≥ 1.1V | 0.8 V <sub>DD</sub>  | --  | --  |      |
| RESET Output Voltage Low  | V <sub>OL</sub> | V <sub>DD</sub> > V <sub>TH(MAX)</sub> ,I <sub>SINK</sub> = 3.5mA,<br>V <sub>TH</sub> ≥ 3V      | --                   | --  | 0.4 | V    |
|                           |                 | V <sub>DD</sub> > V <sub>TH(MAX)</sub> ,I <sub>SINK</sub> = 1.2mA,<br>V <sub>TH</sub> ≥ 1.8V    | --                   | --  | 0.3 |      |
|                           |                 | V <sub>DD</sub> > V <sub>TH(MAX)</sub> ,I <sub>SINK</sub> = 0.5mA,<br>V <sub>TH</sub> ≥ 1.2V    | --                   | --  | 0.3 |      |
| RESET Output Voltage High | V <sub>OH</sub> | 1.1V < V <sub>DD</sub> < V <sub>TH(MIN)</sub> ,<br>I <sub>SOURCE</sub> = 200μA                  | 0.8 V <sub>DD</sub>  | --  | --  | V    |
|                           |                 | 1.8V < V <sub>DD</sub> < V <sub>TH(MIN)</sub> ,<br>I <sub>SOURCE</sub> = 500μA                  | 0.8 V <sub>DD</sub>  | --  | --  |      |
|                           |                 | 3V < V <sub>DD</sub> < V <sub>TH(MIN)</sub> ,<br>I <sub>SOURCE</sub> = 800μA                    | V <sub>DD</sub> -1.5 | --  | --  |      |







**Note 1.** Stresses listed as the above “Absolute Maximum Ratings” may cause permanent damage to the device. These are for stress ratings. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may remain possibility to affect device reliability.







**Note 2.** θ<sub>JA</sub> is measured in the natural convection at T<sub>A</sub> = 25°C on a low effective thermal conductivity test board of JEDEC 51-3 thermal measurement standard.

**Note 3.** Devices are ESD sensitive. Handling precaution is recommended.


**Note 4.** The device is not guaranteed to function outside its operating conditions.

# Typical Operating Characteristics

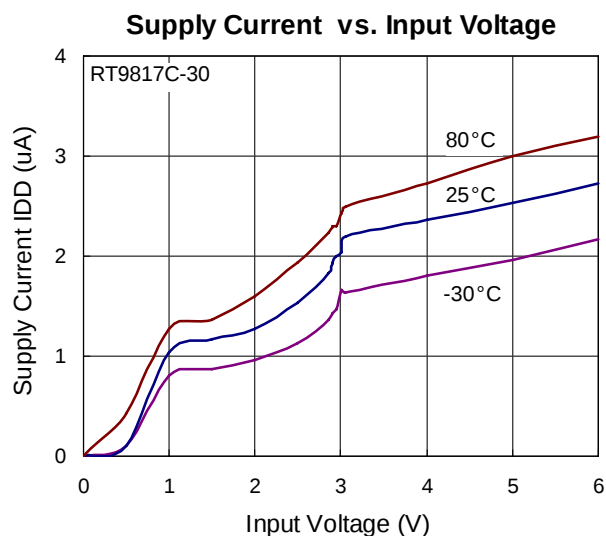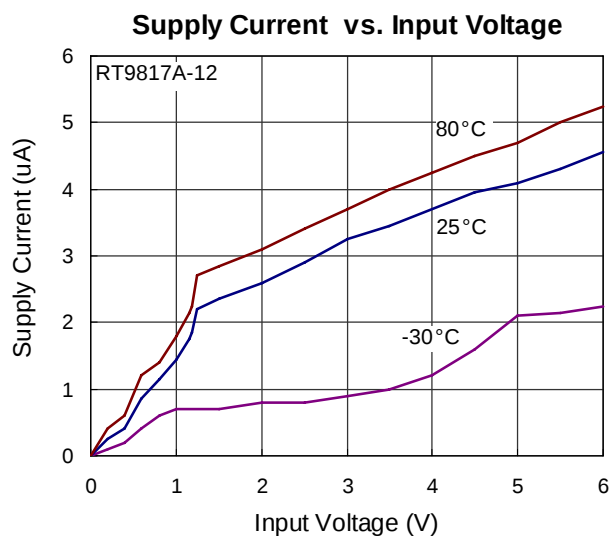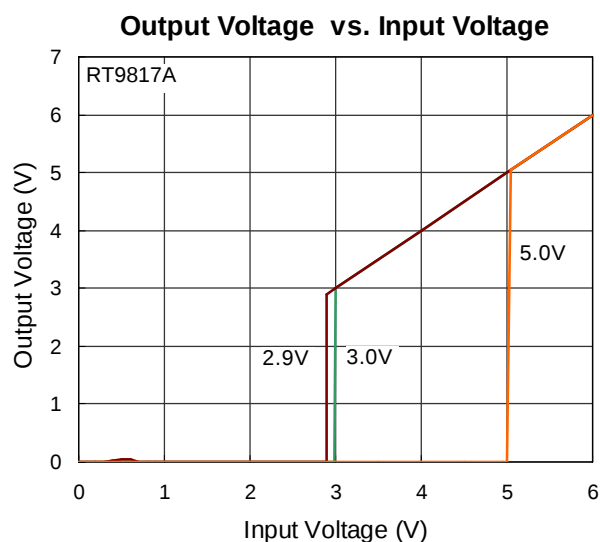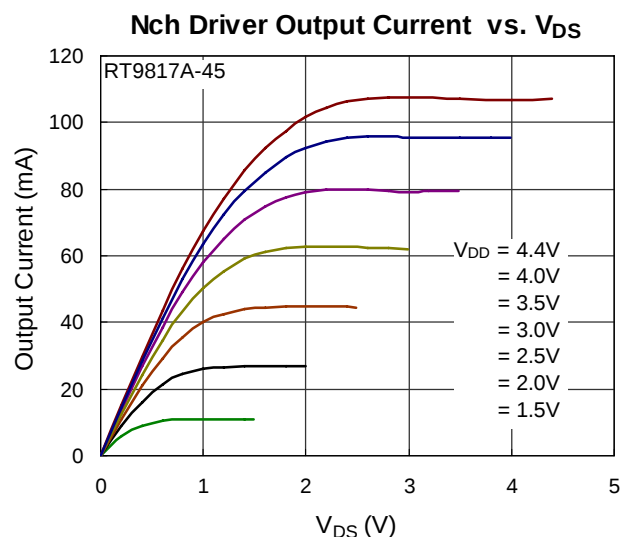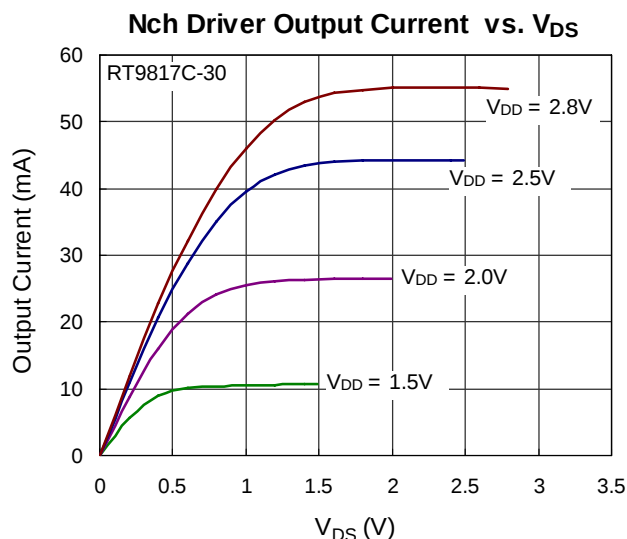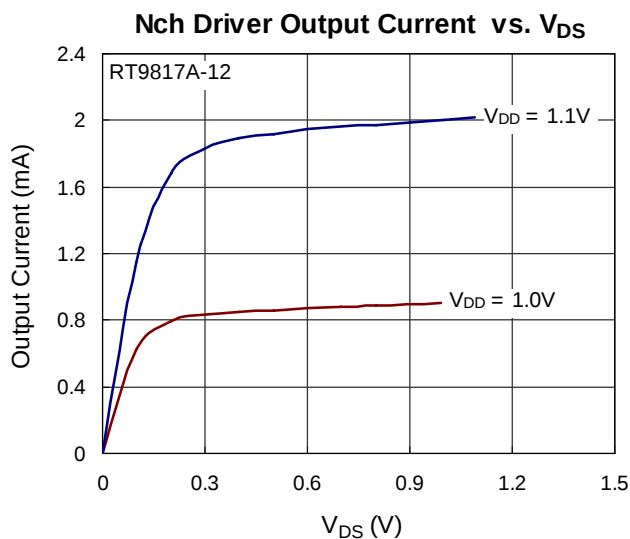


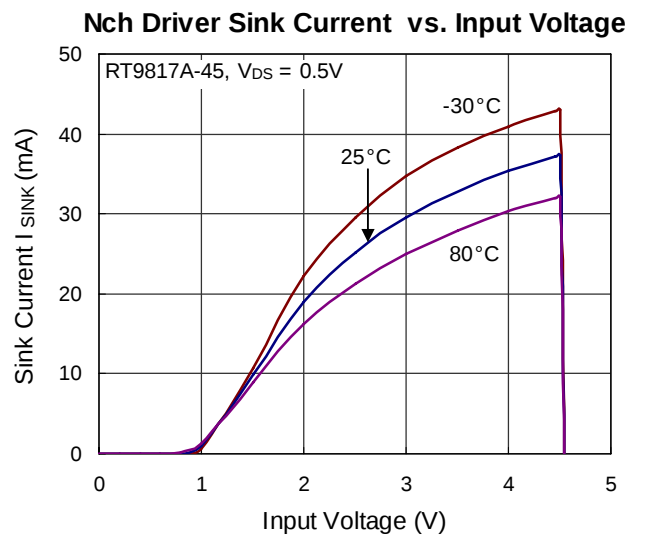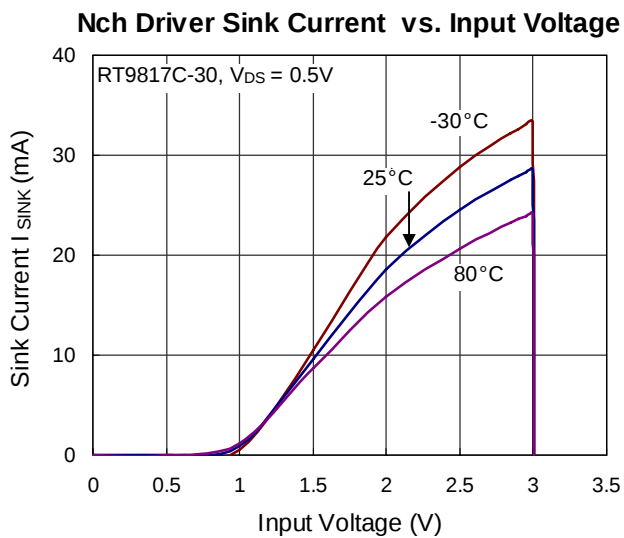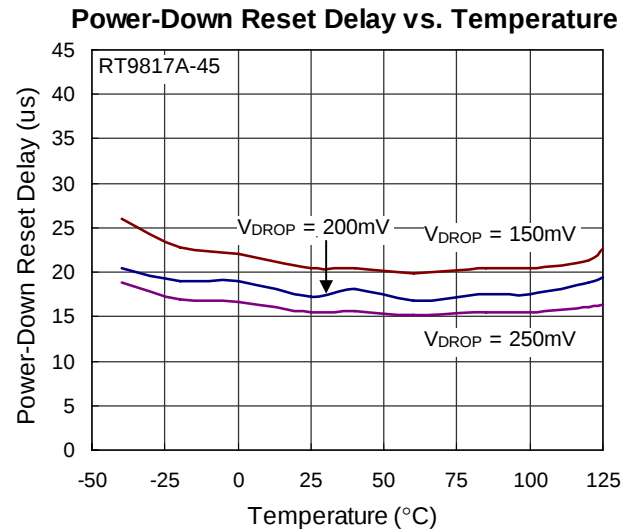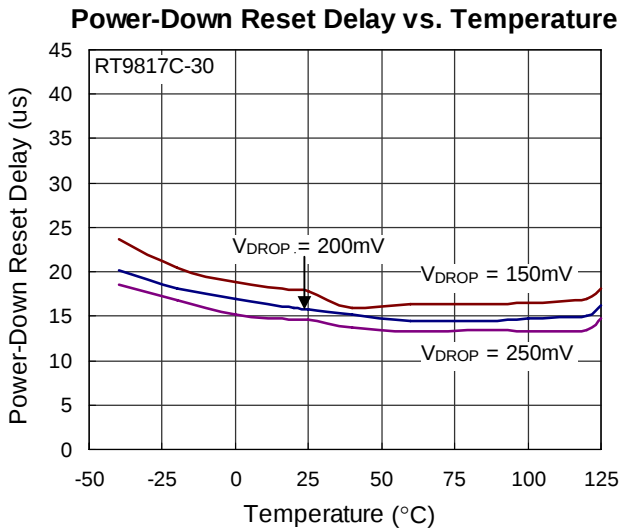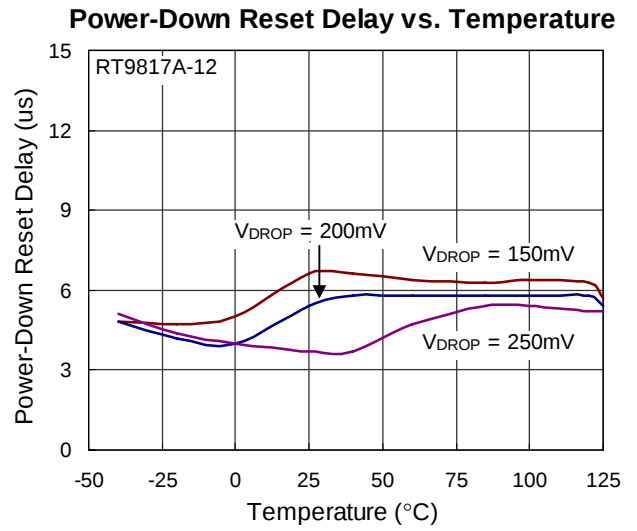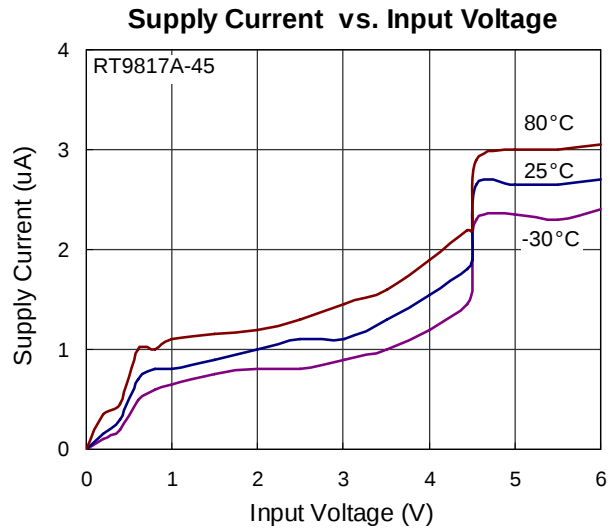


Reset Threshold Deviation vs. Temperature

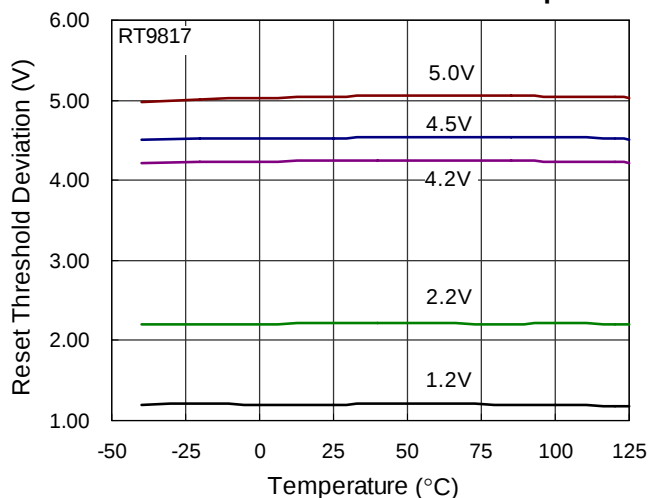


Pch Driver Output Current vs. Input Voltage

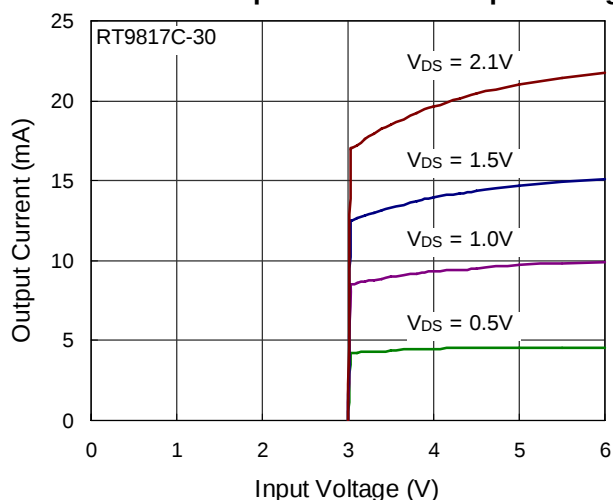


Power-Up Reset Time-Out vs. Temperature

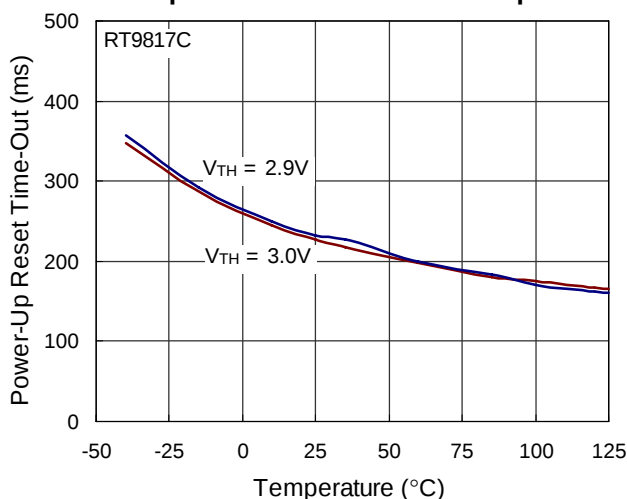


Power-Up Reset Time-Out vs. Temperature

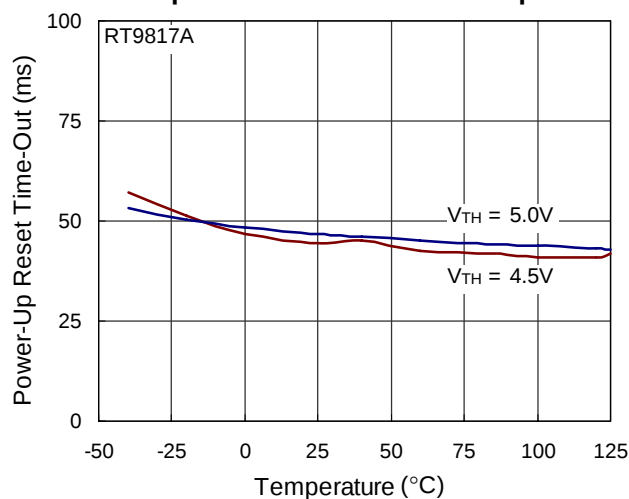


Output Delay Time vs. Load Capacitance

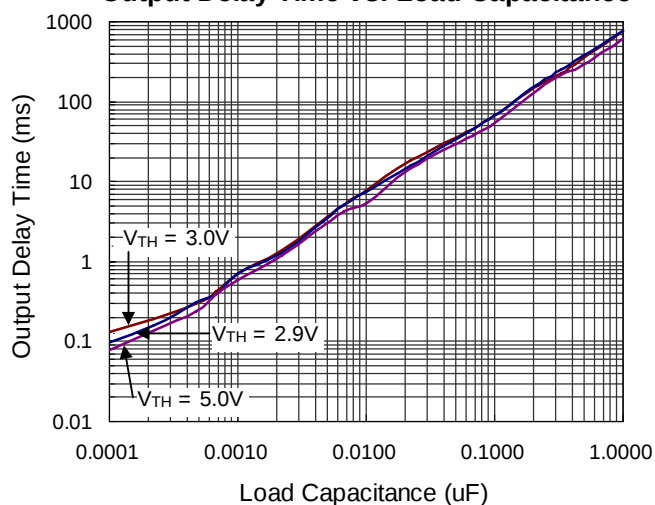


Nch Driver Output Current vs.  $V_{DS}$

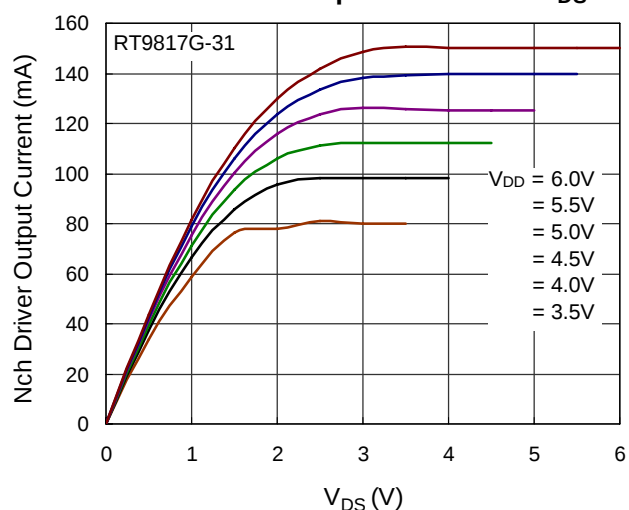


### Nch Driver Output Current vs. Input Voltage

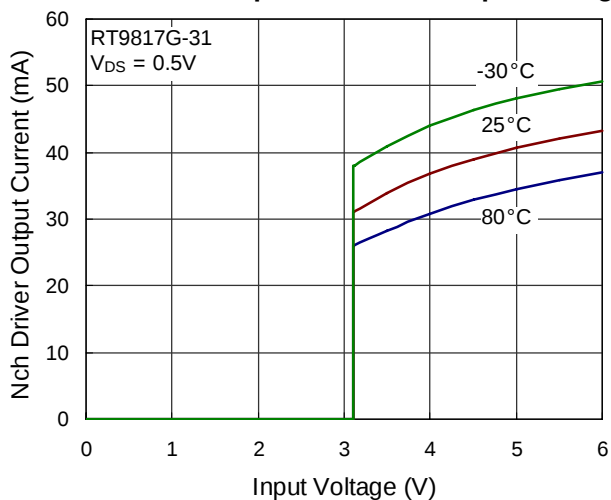


### Power Down Reset Time-Out vs. Temperature

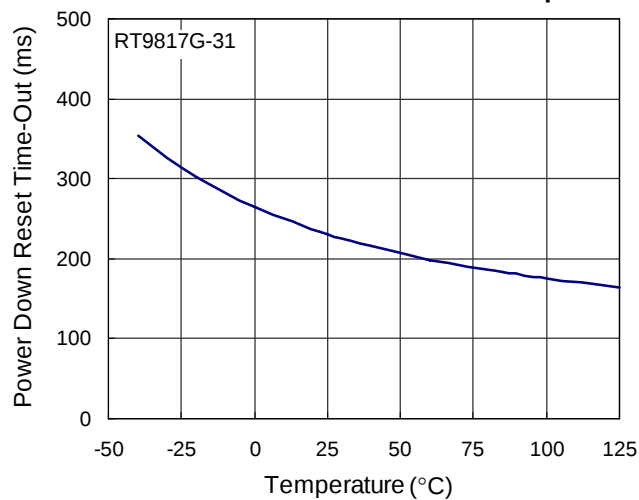

### Output Voltage vs. Input Voltage

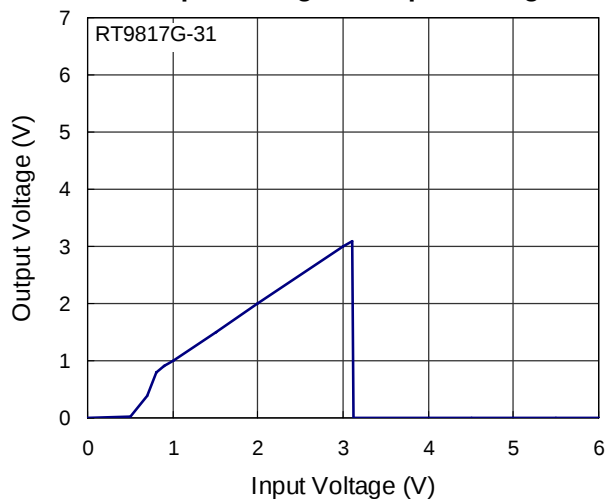

### Power-Down Reset Time-Out vs. Temperature

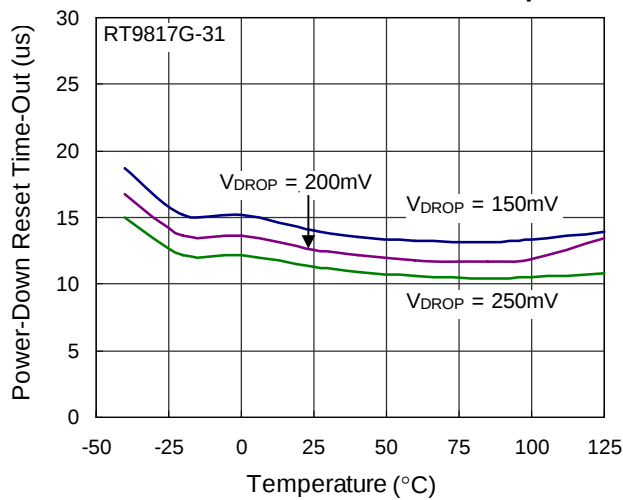


## Application Information

### Benefits of Highly Accurate Reset Threshold


Most  $\mu$ P supervisor ICs have reset threshold voltages between 1% and 1.5% below the value of nominal supply voltages. This ensures a reset will not occur within 1% of the nominal supply, but will occur when the supply is 1.5% below nominal.

## Outline Dimension

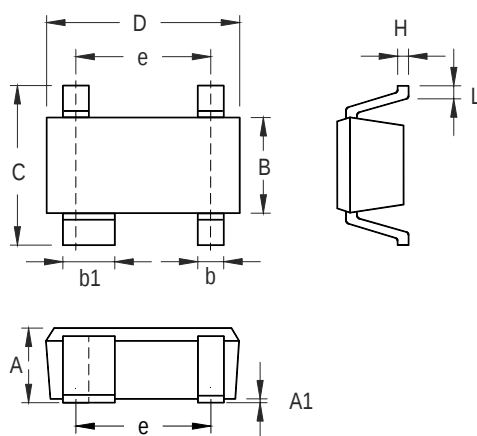

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 0.800                     | 1.200 | 0.031                | 0.047 |
| A1     | 0.050                     | 0.150 | 0.002                | 0.006 |
| B      | 1.200                     | 1.400 | 0.047                | 0.055 |
| b      | 0.300                     | 0.520 | 0.012                | 0.020 |
| b1     | 0.760                     | 0.920 | 0.030                | 0.036 |
| C      | 2.100                     | 2.640 | 0.083                | 0.104 |
| D      | 2.800                     | 3.040 | 0.110                | 0.120 |
| e      | 1.900                     |       | 0.075                |       |
| H      | 0.080                     | 0.150 | 0.003                | 0.006 |
| L      | 0.210                     | 0.410 | 0.008                | 0.016 |

SOT-143 Surface Mount Package

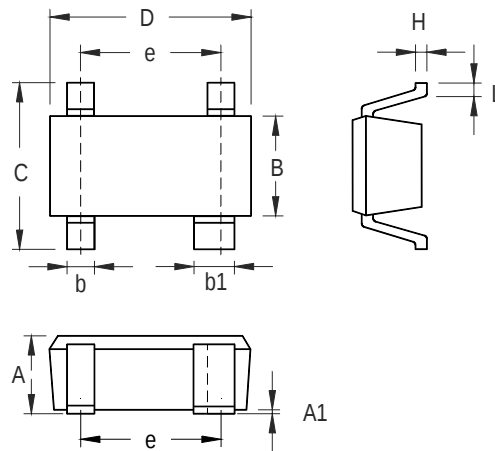

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 0.800                     | 1.100 | 0.031                | 0.043 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| B      | 1.150                     | 1.350 | 0.045                | 0.053 |
| b      | 0.150                     | 0.400 | 0.006                | 0.016 |
| b1     | 0.350                     | 0.500 | 0.014                | 0.020 |
| C      | 1.800                     | 2.450 | 0.071                | 0.096 |
| D      | 1.800                     | 2.200 | 0.071                | 0.087 |
| e      | 1.300                     |       | 0.051                |       |
| H      | 0.080                     | 0.260 | 0.003                | 0.010 |
| L      | 0.200                     | 0.460 | 0.008                | 0.018 |

**SC-82 Surface Mount Package**

**Richtek Technology Corporation**

Headquarter  
5F, No. 20, Taiyuen Street, Chupei City  
Hsinchu, Taiwan, R.O.C.  
Tel: (8863)5526789 Fax: (8863)5526611

**Richtek Technology Corporation**

Taipei Office (Marketing)  
5F, No. 95, Minchiuan Road, Hsintien City  
Taipei County, Taiwan, R.O.C.  
Tel: (8862)86672399 Fax: (8862)86672377  
Email: marketing@richtek.com

Information that is provided by Richtek Technology Corporation is believed to be accurate and reliable. Richtek reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time. No third party intellectual property infringement of the applications should be guaranteed by users when integrating Richtek products into any application. No legal responsibility for any said applications is assumed by Richtek.