

2,000 V - 10,000 V Rectifiers

25 mA - 250 mA Forward Current

70 ns Recovery Time

1N6529 1N6531

1N6533 1N6535

AXIAL LEADED

HERMETICALLY SEALED

MIL-PRF-19500/577

JANTX JANTXV




4

ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Working Reverse Voltage	Average Rectified Current		Reverse Current @ Vrwm		Forward Voltage		1 Cycle Surge Current tp=8.3ms (Ifsm)	Repetitive Surge Current (Ifrm)	Reverse Recovery Time (3) (Trr)	Thermal Impedance			Junction Cap. @50VDC @ 1kHz (Cj)
	(Vrwm)	(Io)		(Ir)		(Vf)		25°C	25°C	25°C	θ_{J-L}			
		55°C(1)	100°C(2)	25°C	100°C	25°C		25°C	25°C	25°C	L=000	L=.125	L=.250	25°C
	Volts	Amps	Amps	µA	µA	Volts	mA	Amps	Amps	ns	°C/W	°C/W	°C/W	pF
1N6529	2000	0.250	0.125	0.1	10	3.0	25	10	1.50	70	18	30	50	4.0
1N6531	3000	0.100	0.050	0.1	10	7.0	25	8	1.25	70	18	30	50	2.0
1N6533	5000	0.050	0.025	0.1	10	9.0	25	4	0.75	70	18	30	50	1.0
1N6535	10000	0.025	0.012	0.1	10	14.0	25	2	0.38	70	18	30	50	0.5

(1)TL=55°C L=0.375" (2)TL=100°C L=0.375" (3)If=12.5mA, Ir=25mA, Irr=6.3mA • Op.Temp.= -65°C to +175°C Stg.Temp.= -65°C to +200°C

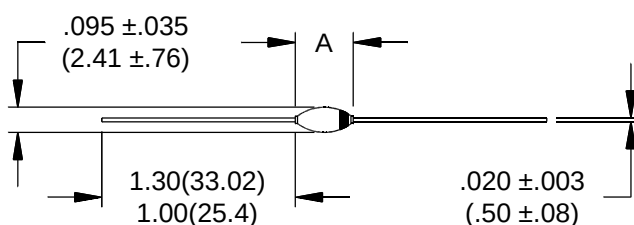

Part	A
1N6529	.200(5.08) MAX. .140(3.56) MIN.
1N6531	.220(5.59) MAX. .160(4.06) MIN.
1N6533	.240(6.10) MAX. .180(4.57) MIN.
1N6535	.300(7.62) MAX. .240(6.10) MIN.



Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



VOLTAGE MULTIPLIERS INC.
8711 W. Roosevelt Ave.
Visalia, CA 93291

TEL 559-651-1402
FAX 559-651-0740
www.voltagemultipliers.com

1N6529 1N6531 1N6533 1N6535

