


C-Series Single Pole Toggle Switches



The C-Series single pole compact high current toggle switches are ideal for applications with back panel size constraints. These switches feature self-cleaning contacts and ratings up to 20A 125VAC, 10A 250VAC, 1 1/2 HP 125-250VAC. With a rugged metal construction, these switches figure prominently in the Environmental Controls, Marine, Food Service, Vacuum Cleaner and various other general purpose markets with stringent current carrying requirements.

Dielectric Strength

UL/CSA: 1000V - live to dead metal parts and opposite polarity.

Electrical Life

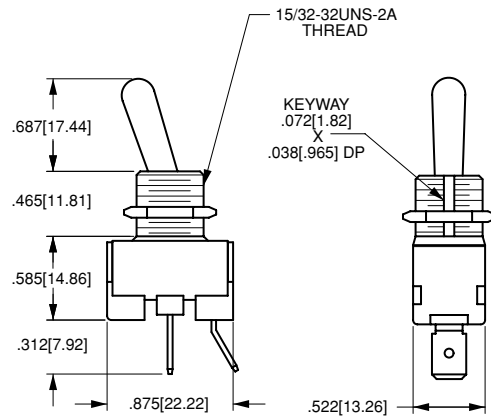
25,000 cycles







Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to +85°C)



 <p>.125[3.17] DIA .375[9.52] .250[6.35]</p>	 <p>.075[1.90] DIA .250[6.35]</p>
SOLDER LUG	.250 TAB (Q.C.)
TERMINAL TYPE	
 <p>#6-32NC-2 THREAD .141[3.58] .370[9.39] .286[7.26]</p>	 <p>6.000[152.40] .500[12.70]</p>
SCREW (ASSEMBLED)	WIRE LEAD
 <p>.500[12.70] DIA</p>	 <p>.062[1.57] .500[12.70] DIA .376[9.55] .500[12.70] DIA .125[3.17] DIA</p>
MOUNTING HOLE	WITH KEYWAY WITH LOCKING RING

CA201

- 73

¹
Base Part Number

²
Actuator Style

1 BASE PART NUMBER: SERIES/POLES/CIRCUITRY/RATING/TERMINATION

Single Pole

10A 250VAC, 20A 125VAC, 1 1/2 HP 125-250VAC

	solder lug	.250 tab	screw term.	wire leads
ON-NONE-OFF	CA200	CA201	CA204	CA205
ON-NONE-ON	CB200	CB201	CB204	CB205

2 ACTUATOR STYLE¹

BAT	unsealed	sealed	toggle length	bushing length
	73	78	0.687	0.465

NOTES

¹ Additional toggle styles available. Consult factory.