

**Microsemi**

SCOTTSDALE DIVISION

**SMCJ5.0 thru SMCJ170CA, e3
and SMCG5.0 thru SMCG170CA, e3****SURFACE MOUNT 1500 Watt
Transient Voltage Suppressor****DESCRIPTION**

The SMCJ5.0-170A or SMCG5.0-170A series of 1500 W Transient Voltage Suppressors (TVSs) protects a variety of voltage-sensitive components. It is available in J-bend design (SMCJ) with the DO-214AB package for greater PC board mounting density or in a Gull-wing design (SMCG) in the DO-215AB for visible solder connections. Selections include unidirectional and bidirectional as well as RoHS Compliant with an e3 suffix. They can protect from secondary lightning effects per IEC61000-4-5 and class levels defined herein, or for inductive switching environments and induced RF protection. Since their response time is virtually instantaneous, they can also be used in protection from ESD and EFT per IEC61000-4-2 and IEC61000-4-4.


IMPORTANT: For the most current data, consult *MICROSEMI*'s website: <http://www.microsemi.com>

FEATURES

- Economical surface mount design in both J-bend or Gull-wing terminations
- Available in both Unidirectional and Bidirectional construction with a C or CA suffix
- Optional 100% **screening for avionics grade** is available by adding MA prefix to part number for added 100% temperature cycle -55°C to +125°C (10X) as well as surge (3X) and 24 hours HTRB with post test V_{BR} & I_D (in the operating direction for unidirectional or both directions for bidirectional)
- Options for screening in accordance with MIL-PRF-19500 for JAN, JANTX, JANTXV, and JANS are available by adding MQ, MX, MV, or MSP prefixes respectively to part numbers.
- Axial-lead equivalent packages for thru-hole mounting available as 1.5KE6.8 to 1.5KE200CA or 1N6267 thru 1N6303A and 1N5908 (consult factory for other surface mount options)
- Moisture classification is Level 1 with no dry pack required per IPC/JEDEC J-STD-020B
- RoHS compliant devices available by adding "e3" suffix

MAXIMUM RATINGS

- Peak Pulse Power dissipation at 25°C: 1500 watts at 10/1000 μ s (also see Fig 1,2, and 3)
- Impulse repetition rate (duty factor): 0.01%
- $t_{clamping}$ (0 volts to $V_{(BR)}$ min.): < 100 ps theoretical for unidirectional and < 5 ns for bidirectional
- Operating and Storage temperature: -65°C to +150°C
- Thermal resistance: 20°C/W junction to lead, or 80°C/W junction to ambient when mounted on FR4 PC board (1oz Cu) with recommended footprint (see last page)
- Steady-State Power dissipation: 6 watts at $T_L = 30^\circ\text{C}$, or 1.56 watts at $T_A = 25^\circ\text{C}$ when mounted on FR4 PC board with recommended footprint
- Forward Surge: 200 Amps peak impulse of 8.3 ms half-sine wave at 25°C (unidirectional only)
- Solder temperatures: 260 °C for 10 s (maximum)

APPEARANCE

DO-214AB
DO-215AB

NOTE: All SMC series are equivalent to prior SMM package identifications.

APPLICATIONS / BENEFITS

- Selections for 5.0 to 170 volts standoff voltages (V_{WM})
- Protection from switching transients and induced RF
- Protection from ESD, and EFT per IEC 61000-4-2 and IEC 61000-4-4
- Secondary lightning protection per IEC61000-4-5 with 42 Ohms source impedance:
 - Class 1: SMC 5.0 to SMC 170A or CA
 - Class 2: SMC 5.0 to SMC 150A or CA
 - Class 3: SMC 5.0 to SMC 75A or CA
 - Class 4: SMC 5.0 to SMC 36A or CA
- Secondary lightning protection per IEC61000-4-5 with 12 Ohms source impedance:
 - Class 1 : SMC 5.0 to SMC 90A or CA
 - Class 2: SMC 5.0 to SMC 45A or CA
 - Class 3: SMC 5.0 to SMC 24A or CA
 - Class 4: SMC 5.0 to SMC 11A or CA
- Secondary lightning protection per IEC61000-4-5 with 2 Ohms source impedance:
 - Class 2: SMC 5.0 to SMC 22A or CA
 - Class 3: SMC 5.0 to SMC 10A or CA

MECHANICAL AND PACKAGING

- CASE: Void-free transfer molded thermosetting epoxy body meeting UL94V-0
- TERMINALS: Gull-wing or C-bend (modified J-bend) leads, tin-lead or RoHS compliant annealed matte-tin plating solderable to MIL-STD-750, method 2026
- POLARITY: Cathode indicated by band. No marking on bi-directional devices
- MARKING: Part number without "SM" prefix (e.g. C5.0, C5.0A, C5.0CA, MXC5.0A, 5.0Ae3, C5.0CAe3, C36, C36A, C36CA, MAC36CA, 36CAe3, etc.)
- TAPE & REEL option: Standard per EIA-481-2 with 16 mm tape, 750 per 7 inch reel or 2500 per 13 inch reel (add "TR" suffix to part number)
- WEIGHT: 0.25 grams

**Microsemi**

SCOTTSDALE DIVISION

**SMCJ5.0 thru SMCJ170CA, e3
and SMCG5.0 thru SMCG170CA, e3****SURFACE MOUNT 1500 Watt
Transient Voltage Suppressor**

► ELECTRICAL CHARACTERISTICS @ 25°C

MICROSEMI PART NUMBER		REVERSE STAND-OFF VOLTAGE V _{WM} Volts	BREAKDOWN VOLTAGE V _(BR) @ I _(BR) Volts		MAXIMUM CLAMPING VOLTAGE @ I _{PP} Volts	PEAK PULSE CURRENT (See Fig. 2) I _{PP} Amps	MAXIMUM STANDBY CURRENT @ V _{WM} I _B μA
GULL-WING LEAD	MODIFIED "J" BEND LEAD		MIN.	MAX.			
SMCG5.0	SMCJ5.0	5.0	6.40 – 7.30	10	9.6	156.2	1000
SMCG5.0A	SMCJ5.0A	5.0	6.40 – 7.00	10	9.2	163.0	1000
SMCG6.0	SMCJ6.0	6.0	6.67 – 8.15	10	11.4	131.6	1000
SMCG6.0A	SMCJ6.0A	6.0	6.67 – 7.37	10	10.3	145.6	1000
SMCG6.5	SMCJ6.5	6.5	7.22 – 8.82	10	12.3	122.0	500
SMCG6.5A	SMCJ6.5A	6.5	7.22 – 7.98	10	11.2	133.9	500
SMCG7.0	SMCJ7.0	7.0	7.78 – 9.51	10	13.3	112.8	200
SMCG7.0A	SMCJ7.0A	7.0	7.78 – 8.60	10	12.0	125.0	200
SMCG7.5	SMCJ7.5	7.5	8.33 – 10.2	1	14.3	104.9	100
SMCG7.5A	SMCJ7.5A	7.5	8.33 – 9.21	1	12.9	116.3	100
SMCG8.0	SMCJ8.0	8.0	8.89 – 10.9	1	15.0	100.0	50
SMCG8.0A	SMCJ8.0A	8.0	8.89 – 9.83	1	13.6	110.3	50
SMCG8.5	SMCJ8.5	8.5	9.44 – 11.5	1	15.9	94.3	20
SMCG8.5A	SMCJ8.5A	8.5	9.44 – 10.4	1	14.4	104.2	20
SMCG9.0	SMCJ9.0	9.0	10.0 – 12.2	1	16.9	88.7	10
SMCG9.0A	SMCJ9.0A	9.0	10.0 – 11.1	1	15.4	97.4	10
SMCG10	SMCJ10	10	11.1 – 13.6	1	18.8	79.8	5
SMCG10A	SMCJ10A	10	11.1 – 12.3	1	17.0	88.2	5
SMCG11	SMCJ11	11	12.2 – 14.9	1	20.1	74.6	5
SMCG11A	SMCJ11A	11	12.2 – 13.5	1	18.2	82.4	5
SMCG12	SMCJ12	12	13.3 – 16.3	1	22.0	68.2	5
SMCG12A	SMCJ12A	12	13.3 – 14.7	1	19.9	75.3	5
SMCG13	SMCJ13	13	14.4 – 17.6	1	23.8	63.0	1
SMCG13A	SMCJ13A	13	14.4 – 15.9	1	21.5	69.7	1
SMCG14	SMCJ14	14	15.6 – 19.1	1	25.8	58.1	1
SMCG14A	SMCJ14A	14	15.6 – 17.2	1	23.2	64.7	1
SMCG15	SMCJ15	15	16.7 – 20.4	1	26.9	55.8	1
SMCG15A	SMCJ15A	15	16.7 – 18.5	1	24.4	61.5	1
SMCG16	SMCJ16	16	17.8 – 21.8	1	28.8	52.1	1
SMCG16A	SMCJ16A	16	17.8 – 19.7	1	26.0	57.7	1
SMCG17	SMCJ17	17	18.9 – 23.1	1	30.5	49.2	1
SMCG17A	SMCJ17A	17	18.9 – 20.9	1	27.6	53.3	1
SMCG18	SMCJ18	18	20.0 – 24.4	1	32.2	46.6	1
SMCG18A	SMCJ18A	18	20.0 – 22.1	1	29.2	51.4	1
SMCG20	SMCJ20	20	22.2 – 27.1	1	35.8	41.9	1
SMCG20A	SMCJ20A	20	22.2 – 24.5	1	32.4	46.3	1
SMCG22	SMCJ22	22	24.4 – 29.8	1	39.4	38.1	1
SMCG22A	SMCJ22A	22	24.4 – 26.9	1	35.5	42.2	1
SMCG24	SMCJ24	24	26.7 – 32.6	1	43.0	34.9	1
SMCG24A	SMCJ24A	24	26.7 – 29.5	1	38.9	38.6	1
SMCG26	SMCJ26	26	28.9 – 35.3	1	46.6	32.2	1
SMCG26A	SMCJ26A	26	28.9 – 31.9	1	42.1	35.6	1
SMCG28	SMCJ28	28	31.1 – 38.0	1	50.0	30.0	1
SMCG28A	SMCJ28A	28	31.1 – 34.4	1	45.4	33.0	1
SMCG30	SMCJ30	30	33.3 – 40.7	1	53.5	28.0	1
SMCG30A	SMCJ30A	30	33.3 – 36.8	1	48.4	31.0	1
SMCG33	SMCJ33	33	36.7 – 44.9	1	59.0	25.2	1
SMCG33A	SMCJ33A	33	36.7 – 40.6	1	53.3	28.1	1
SMCG36	SMCJ36	36	40.0 – 48.9	1	64.3	23.3	1
SMCG36A	SMCJ36A	36	40.0 – 44.2	1	58.1	25.8	1
SMCG40	SMCJ40	40	44.4 – 54.3	1	71.4	21.0	1
SMCG40A	SMCJ40A	40	44.4 – 49.1	1	64.5	23.2	1
SMCG43	SMCJ43	43	47.8 – 58.4	1	76.7	19.6	1
SMCG43A	SMCJ43A	43	47.8 – 52.8	1	69.4	21.6	1
SMCG45	SMCJ45	45	50.0 – 61.1	1	80.3	18.7	1
SMCG45A	SMCJ45A	45	50.0 – 55.3	1	72.7	20.6	1

**Microsemi**

SCOTTSDALE DIVISION

**SMCJ5.0 thru SMCJ170CA, e3
and SMCG5.0 thru SMCG170CA, e3****SURFACE MOUNT 1500 Watt
Transient Voltage Suppressor**

MICROSEMI PART NUMBER		REVERSE STAND-OFF VOLTAGE	BREAKDOWN VOLTAGE $V_{(BR)}$ @ $I_{(BR)}$ Volts		MAXIMUM CLAMPING VOLTAGE @ I_{PP}	PEAK PULSE CURRENT (See Fig. 2) I_{PP}	MAXIMUM STANDBY CURRENT @ V_{WM} I_D μA	
GULL-WING LEAD	MODIFIED "J" BEND LEAD	V_{WM} Volts	MIN.	MAX.	$I_{(BR)}$ mA	Volts	Amps	
SMCG48	SMCJ48	48	53.3	65.1	1	85.5	17.5	1
SMCG48A	SMCJ48A	48	53.3	58.9	1	77.4	19.4	1
SMCG51	SMCJ51	51	56.7	69.3	1	91.1	18.5	1
SMCG51A	SMCJ51A	51	56.7	62.7	1	82.4	18.2	1
SMCG54	SMCJ54	54	60.0	73.3	1	96.3	15.6	1
SMCG54A	SMCJ54A	54	60.0	66.3	1	87.1	17.2	1
SMCG58	SMCJ58	58	64.4	78.7	1	103.0	14.6	1
SMCG58A	SMCJ58A	58	64.4	71.2	1	93.6	16.0	1
SMCG60	SMCJ60	60	66.7	81.5	1	107.0	14.0	1
SMCG60A	SMCJ60A	60	66.7	73.7	1	96.8	15.5	1
SMCG64	SMCJ64	64	71.1	86.9	1	114.0	13.2	1
SMCG64A	SMCJ64A	64	71.1	78.6	1	103.0	14.6	1
SMCG70	SMCJ70	70	77.8	95.1	1	125	12.0	1
SMCG70A	SMCJ70A	70	77.8	86.0	1	113	13.3	1
SMCG75	SMCJ75	75	83.3	102.0	1	134	11.2	1
SMCG75A	SMCJ75A	75	83.3	92.1	1	121	12.4	1
SMCG78	SMCJ78	78	86.7	106.0	1	139	10.8	1
SMCG78A	SMCJ78A	78	86.7	95.8	1	126	11.4	1
SMCG85	SMCJ85	85	94.4	115.0	1	151	9.9	1
SMCG85A	SMCJ85A	85	94.4	104.0	1	137	10.4	1
SMCG90	SMCJ90	90	100	122	1	160	9.4	1
SMCG90A	SMCJ90A	90	100	111	1	146	10.3	1
SMCG100	SMCJ100	100	111	136	1	179	8.4	1
SMCG100A	SMCJ100A	100	111	123	1	162	9.3	1
SMCG110	SMCJ110	110	122	149	1	196	7.7	1
SMCG110A	SMCJ110A	110	122	135	1	177	8.4	1
SMCG120	SMCJ120	120	133	163	1	214	7.0	1
SMCG120A	SMCJ120A	120	133	147	1	193	7.8	1
SMCG130	SMCJ130	130	144	176	1	231	6.5	1
SMCG130A	SMCJ130A	130	144	159	1	209	7.2	1
SMCG150	SMCJ150	150	167	204	1	268	5.6	1
SMCG150A	SMCJ150A	150	167	185	1	243	6.2	1
SMCG160	SMCJ160	160	178	218	1	287	5.2	1
SMCG160A	SMCJ160A	160	178	197	1	259	5.8	1
SMCG170	SMCJ170	170	189	231	1	304	4.9	1
SMCG170A	SMCJ170A	170	189	209	1	275	5.5	1

- For Bidirectional device types indicate a C or CA suffix after the part number. (i.e.: SMCG170CA or SMCJ170C). Bidirectional capacitance is half that shown in figure 4 at zero volts.
- Microsemi Corp's SMC series (1500 W) surface mountable packages are designed specifically for transient voltage suppression. The wide leads assure a large surface contact for good heat dissipation, and a low resistance path for surge current flow to ground. These high speed transient voltage suppressors can be used to effectively protect sensitive components such as integrated circuits and MOS devices.

SYMBOLS & DEFINITIONS

Symbol	Definition	Symbol	Definition
V_{WM}	Working Peak (Standoff) Voltage	I_{PP}	Peak Pulse Current
P_{PP}	Peak Pulse Power	V_C	Clamping Voltage
$V_{(BR)}$	Breakdown Voltage	$I_{(BR)}$	Breakdown Current for $V_{(BR)}$
I_D	Standby Current		

www.Microsemi.com

SMC 5.0-170CA, e3



Microsemi
SCOTTSDALE DIVISION

**SMCJ5.0 thru SMCJ170CA, e3
and SMCG5.0 thru SMCG170CA, e3**

**SURFACE MOUNT 1500 Watt
Transient Voltage Suppressor**

GRAPHS

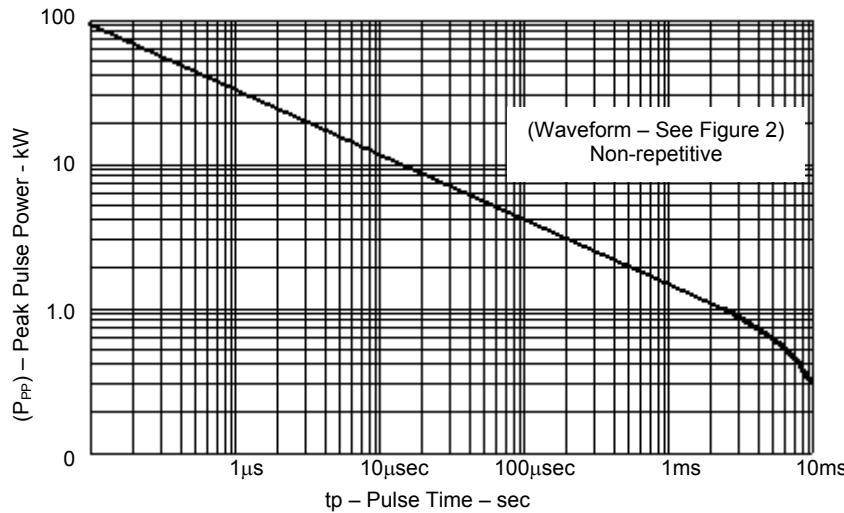


FIGURE 1 – Peak Pulse Power vs. Pulse Time

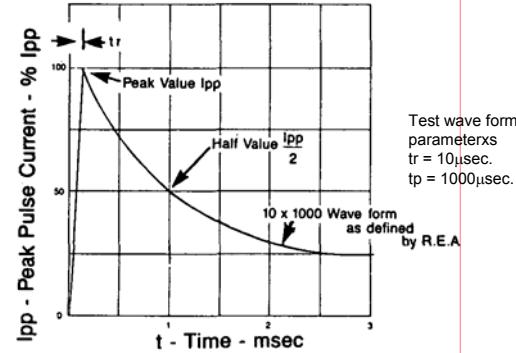


FIGURE 2 – PULSE WAVEFORM

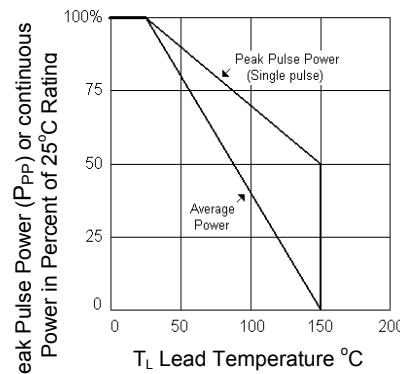


FIGURE 3 – Derating Curve


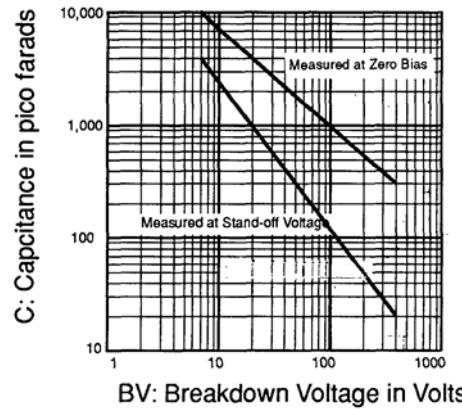


FIGURE 4
Typical Capacitance vs.
Breakdown Voltage

PAD LAYOUT




SMCJ

	INCHES	mm
A	.390	9.90
B	.110	2.79
C	.150	3.81

SMCG

	INCHES	mm
A	0.510	12.95
B	0.110	2.79
C	0.150	3.81

PACKAGE DIMENSIONS

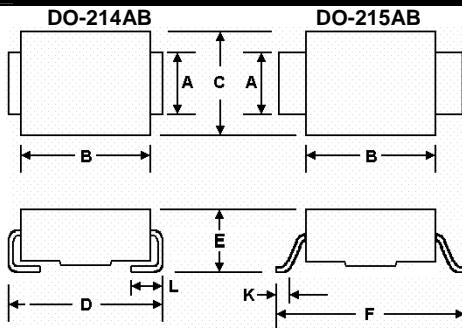

DIMENSIONS IN INCHES								
A	B	C	D	E	F	K	L	
MIN	.115	.260	.220	.305	.077	.380	.025	.030
MAX	.121	.280	.245	.320	.104	.400	.040	.060
DIMENSIONS IN MILLIMETERS								
MIN	2.92	6.60	5.59	7.75	1.95	9.65	0.635	0.760
MAX	3.07	7.11	6.22	8.13	2.65	10.16	1.016	1.520

Typical Standoff Height: 0.004" – 0.008" (0.1mm – 0.2mm)