

UM-DELTA V/D/SI

Order No.: 5603255



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=5603255>

Fuse module with shield connection terminals (for digital cards of the Delta V control system)



Commercial data

GTIN (EAN)	4017918955007
Note	Made-to-order
sales group	I630
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.2274 KG
Catalog page information	Page 200 (IF-2009)

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Nominal voltage U_N	24 V DC
Max. current carrying capacity per branch	50 mA (in as-supplied state, with one 50 mAF fuse, max. 1 A permitted)
Number of positions	16
Width	61 mm
Height	71 mm
Depth	126 mm

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	500 V (50 Hz, 1 min)
Mounting position	Any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103

Connection data

Connection 1	Field level
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm
Screw thread	M3
Connection 2	Control system level
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	16

Certificates / Approvals




Certification

CUL, UL

Diagrams/Drawings

Circuit diagram

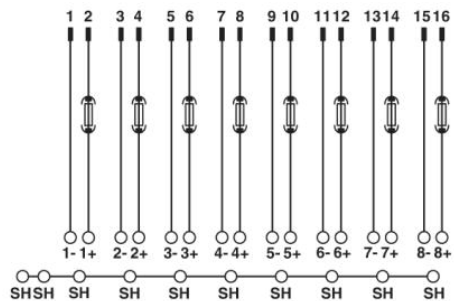

Connection scheme UM-DELTA V/D/SI

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;