




10 9 8 7 6 5 4 3 2 1



④
トレードマーク
TRADE MARK
回路番号 1
CIRCUIT NO.1

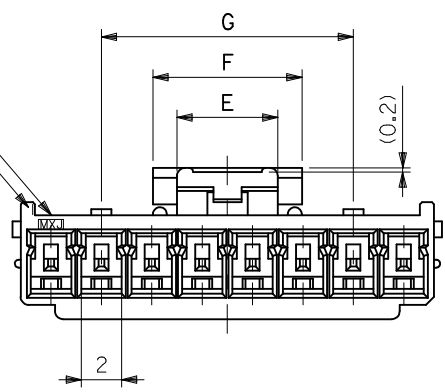

ターミナル装着状態図
TERMINAL ASSEMBLY DRAWING

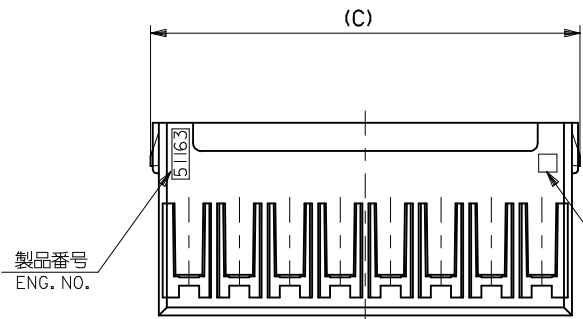

④
キャビティー番号
及び金型番号
CAVITY NO.
AND MODEL NO.

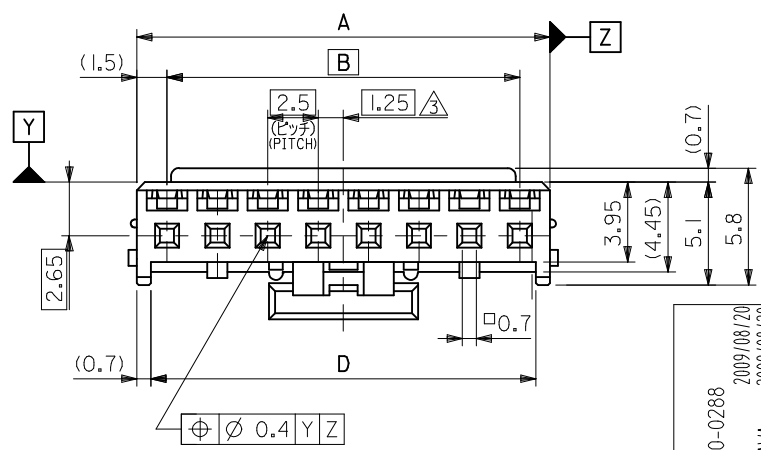

12.5	7.4	5	36.6	38.8	35	38	51163-158*	15
↑	↑	↑	34.1	36.3	32.5	35.5	↑ -148*	14
			31.6	33.8	30	33	↑ -138*	13
			29.1	31.3	27.5	30.5	↑ -128*	12
			26.6	28.8	25	28	↑ -118*	11
			24.1	26.3	22.5	25.5	↑ -108*	10
			21.6	23.8	20	23	↑ -098*	9
12.5			19.1	21.3	17.5	20.5	↑ -088*	8
↓			16.6	18.8	15	18	↑ -078*	7
			14.1	16.3	12.5	15.5	↑ -068*	6
			11.6	13.8	10	13	↑ -058*	5
	7.4	5	9.1	11.3	7.5	10.5	↑ -048*	4
	5	3	6.6	8.8	5	8	↑ 51163-038*	3
G	F	E	D	(C)	B	A	MATERIAL AND ORDER No. ④	CIRCUIT No.

REVISED EC NO: J2010-0288 2009/08/20 DRWN: YG010 CHKD: KASAKAWA 2009/08/20 APPR: NUKITA 2009/08/24	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY K. HARADA	DATE 1997/10/2	TITLE 2.5 W/B CONN HSG (POSITIVE LOCK)				
		10 OVER 30 UNDER	±0.25	CHECKED BY T. ITO	DATE 1997/11/12	MOLEX INCORPORATED DOCUMENT NO. SD-51163-**-00 SHEET NO. 1 OF 2				
		30 OVER	±0.3	APPROVED BY M. FUKUSHIMA	DATE 1997/11/12					
		ANGULAR ±3 °		ENTER PART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3								

注記 NOTES

- △適合ターミナル：5035I-8*00
APPLICABLE TERMINAL：5035I-8*00
2. 嵌合相手：53375,53426 シリーズ
MATE WITH：53375,53426 SERIES
- △3. 偶数極の製品に適用。
APPLY EVEN CIRCUIT PRODUCTS.
- △4. トレードマーク：Mプラス 1 ～ 2 文字のアルファベットにて構成。（例 MXJ）
但し J は JAPANを示す。
FORMED BY M AND 1 ～ 2 MORE LETTER OF ALPHABET (e.g. MXJ)
(TO TRADE MARK), BUT "J" SHOW JAPAN.
- △5. キャビティー番号：1桁～2桁の数字
金型番号：アルファベット1文字にて構成。（例. 1A, 10B）
FORMED BY 1 DIGIT TO 2 DIGIT NUMBERS (TO CAVITY NO.) AND BY 1 LETTER OF ALPHABET (TO MOLD NO.).
(e.g. 1A, 10B)


△6. MATERIAL AND ORDER No.

51163-**00



極数

CIRCUIT SIZE

7. 材料:PBT, UL 94V-0
8. 色:白 WHITE (NATURAL)





REVISED EC NO: DRWN:Y.GOTO CHKD:KASAKAWA APPR: C	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY K. HARADA	DATE 1997/10/2	TITLE 2.5 W/B CONN HSG (POSITIVE LOCK)				
		10 OVER 30 UNDER	± 0.25	CHECKED BY T. ITO	DATE 1997/11/12					
		30 OVER	± 0.3	APPROVED BY M. FUKUSHIMA	DATE 1997/11/12	MOLEX INCORPORATED				
		ANGULAR ± 3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ENTER PART		SD-51163-**00		2 OF 2		
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

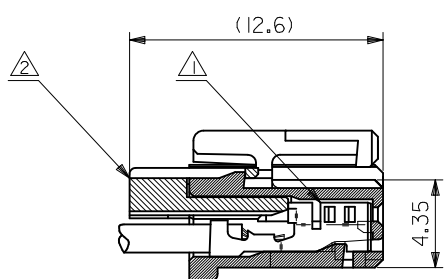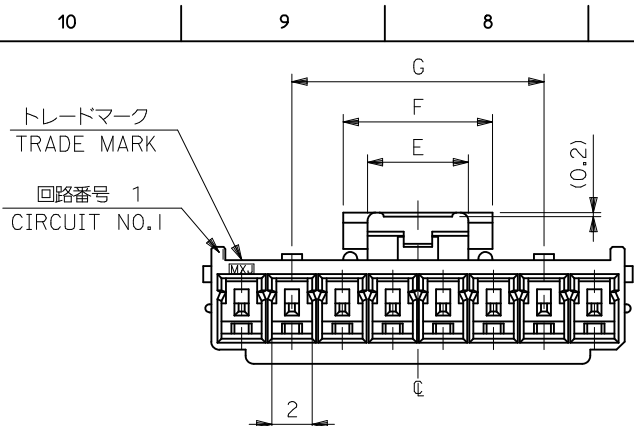


ターミナル及びリテーナー装着状態図
TERMINAL AND RETAINER ASSEMBLY DRAWING

注記 NOTES

- △1 適合ターミナル : 50752-8*00
APPLICABLE TERMINAL : 50752-8*00
- △2 適合リテーナー : 51164-**05
APPLICABLE RETAINER : 51164-**05
- 3. 嵌合相手 : 53375,53376,53388,53389,53426 シリーズ
MATE WITH : 53375,53376,53388,53389,53426 SERIES
- △4 偶数極の製品に適用。
APPLY EVEN CIRCUIT PRODUCTS.

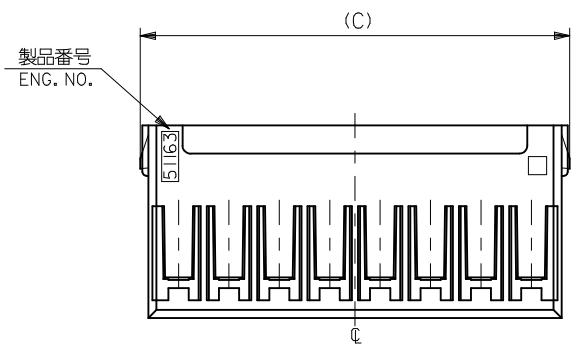

3-15 極に適用
FOR 3-15 CKTS.

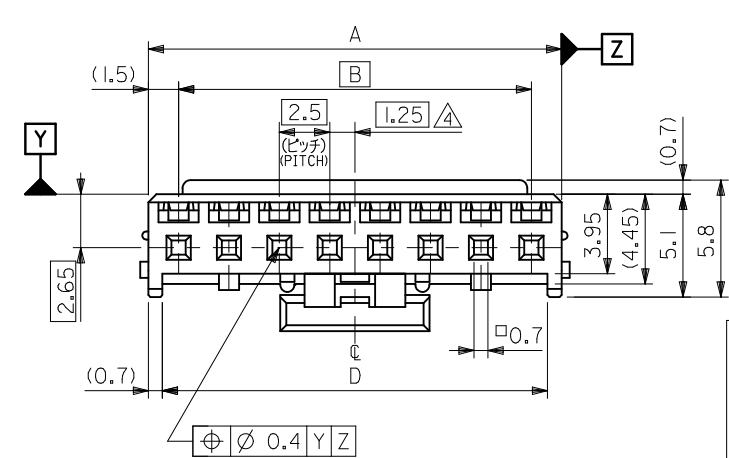

							青 BLUE	赤 RED	黒 BLACK	白 NATURAL	COLOR	
12.5	7.4	5	36.6	38.8	35	38	51163-1504	51163-1502	51163-1501	51163-1500	15	
12.5	↑	↑	34.1	36.3	32.5	35.5	↑ -1404	↑ -1402	↑ -1401	↑ -1400	14	
12.5	↑		31.6	33.8	30	33	↑ -1304	↑ -1302	↑ -1301	↑ -1300	13	
12.5			29.1	31.3	27.5	30.5	-1204	-1202	-1201	-1200	12	
12.5			26.6	28.8	25	28	-1104	-1102	-1101	-1100	11	
12.5			24.1	26.3	22.5	25.5	-1004	-1002	-1001	-1000	10	
12.5			21.6	23.8	20	23	-0904	-0902	-0901	-0900	9	
12.5			19.1	21.3	17.5	20.5	-0804	-0802	-0801	-0800	8	
			16.6	18.8	15	18	-0704	-0702	-0701	-0700	7	
			14.1	16.3	12.5	15.5	-0604	-0602	-0601	-0600	6	
		↓	↓	11.6	13.8	10	13	-0504	-0502	-0501	-0500	5
		7.4	5	9.1	11.3	7.5	10.5	↓ -0404	↓ -0402	↓ -0401	↓ -0400	4
		5	3	6.6	8.8	5	8	51163-0304	51163-0302	51163-0301	51163-0300	3
G	F	E	D	(C)	B	A	MATERIAL NO.	MATERIAL NO.	MATERIAL NO.	MATERIAL NO.	NO. OF CKT	

REVISED EC NO: J2005-1394 DRWN: JSASAMOR CHKDK: TOJO APPR: NUKITA 2004/11/09 2004/11/10 2004/11/18	DESCRIPTION A	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER ±0.2		DRAWN BY J. SASAMO		DATE 2004/8/31		2.5 WIRE TO BORAD CONN. HOUSING (POSITIVE LOCK) WITH RETAINER MOLEX INCORPORATED	
		10 OVER 30 UNDER ±0.25		CHECKED BY K. TOJO		DATE 2004/8/31			
		30 OVER ±0.3		APPROVED BY N. UKITA		DATE 2004/8/31			
ANGULAR ±3 °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. 51163-**0*		DOCUMENT NO. SD-51163-001		SHEET NO. 1 OF 2	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

MATERIAL
PBTP, UL94V-0
SEE CHART

