



For ON Semiconductor NCP1200 Controller

Coilcraft can also custom engineer a transformer to meet your specific requirements. For free evaluation samples, contact Coilcraft or visit **www.coilcraft.com**.





1. Inductance is for the primary, measured at 10 kHz, 0.1 Vrms, 0 Adc
2. Leakage inductance tested at 100 kHz, 0.1 Vrms
3. Isolation tested between primary and secondary on all parts and between primary and auxiliary on Z9260-AL.

4. Primary to secondary turns ratio specified with secondary windings connected in parallel.
5. Operating temperature range -40°C to $+85^{\circ}\text{C}$.
6. Electrical specifications at 25°C .


Z9007-BL, Z9260-AL



Bottom view

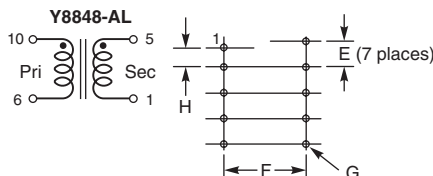

Bottom view

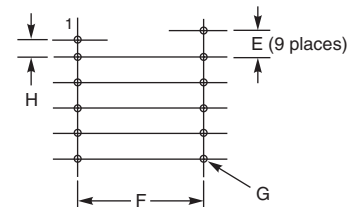

Packaged 25 per tray

Terminations: Tin-silver over tin over copper

Coilcraft®

Document 245 Revised 01/31/05

1102 Silver Lake Road Cary, Illinois 60013 **Phone** 847/639-6400 **Fax** 847/639-1469

E-mail info@coilcraft.com **Web** <http://www.coilcraft.com>