

Preliminary Technical Data (Rev. 0.1, June 22, 2000)

HITACHI

TRM7953AN

STM-16 1.5 μ m Optical Transmitter (for 200 GHz Spacing DWDM)


Preliminary Product Disclaimer

This preliminary data sheet is provided to assist you in the evaluation of functional samples of the products that are under development and for which a reliability test has not been completed. Until Hitachi, Ltd. releases these products for general sales, Hitachi, Ltd. reserves the right to change prices, features, functions, specifications, capabilities and release schedule.


FEATURES

- **Data rates up to 2.5 Gbit/s**
- **Long-haul Transmission Length (400 km)**
- **Wavelength range, 1531.90 nm – 1562.23 nm**
- **ITU-Grid Channel (200 GHz Spacing)**
- **Compact size (51 x 73.4 x 12.7 mm³)**
- **Laser bias monitor output**
- **Laser back-facet monitor output**
- **Laser Temperature Deviation Alarm**
- **Support Single Channel Application**

Block Diagram

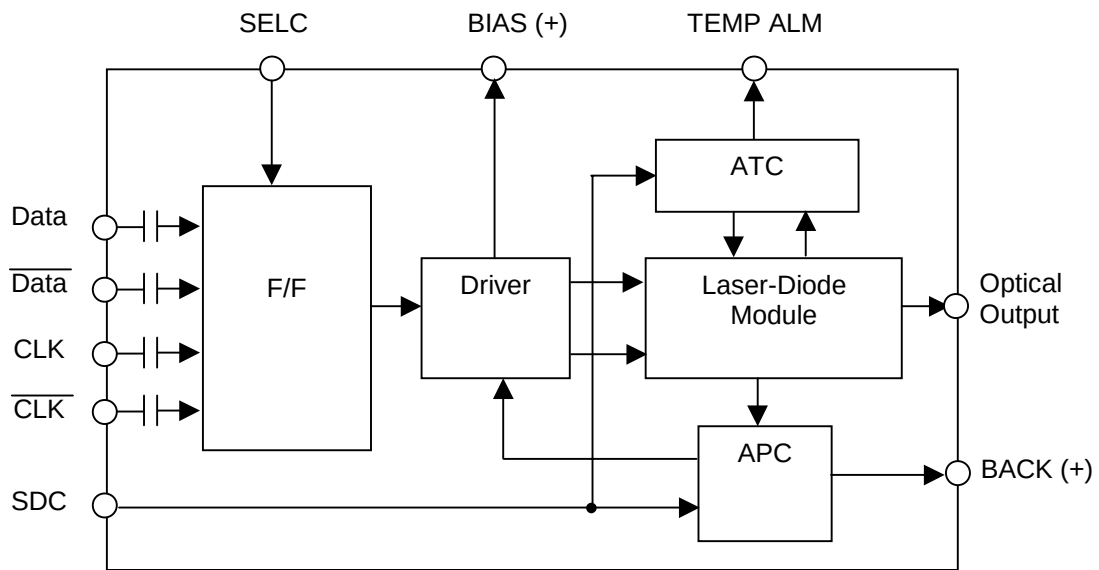

Recommended Circuit

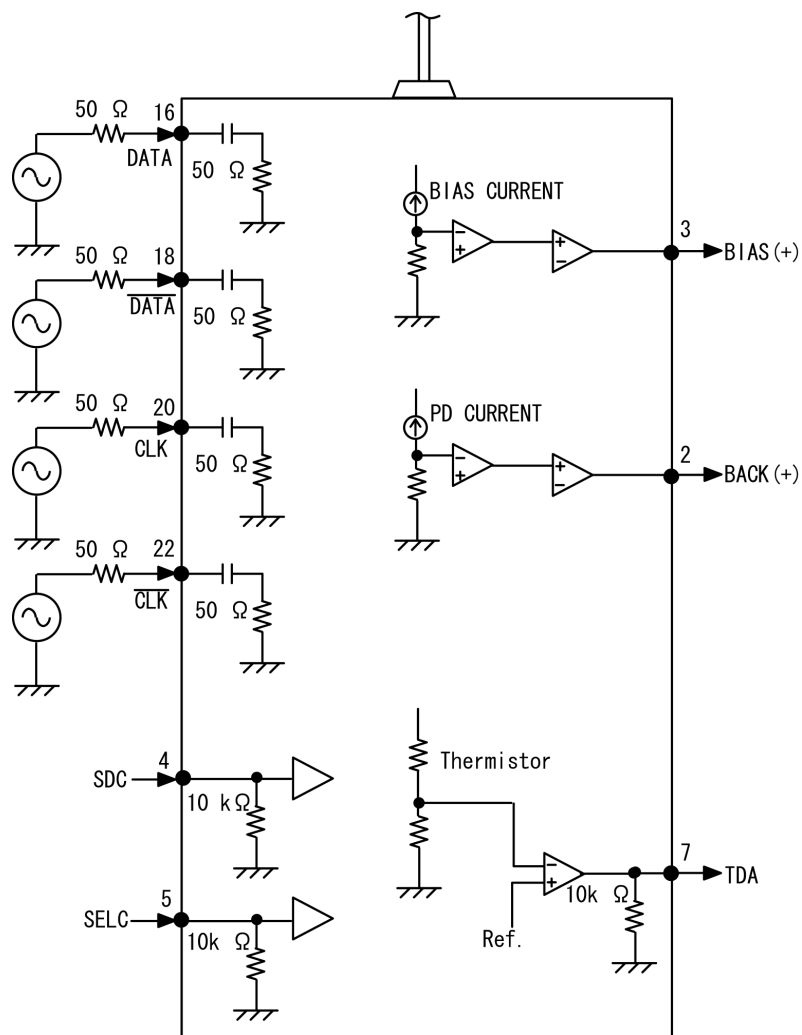

PERFORMANCE SPECIFICATIONS

Table 1. Absolute Maximum Ratings

No.	Item	Symbol	Rated Value	Unit	Note
1	DC Power Supply (+5.0 V)	-	-0.3 to +6.0	V	V _{CC}
2	DC Power Supply (-5.2 V)	-	-6.0 to +0.3	V	V _{EE}
3	DC Power Supply (+3.3 V)	-	-0.3 to +4.0	V	V _{TT}
4	Operating Case Temperature	Topr.	0 to +70	°C	
5	Storage Case Temperature	Tstg.	-20 to +75	°C	
6	Lead Soldering Temperature	-	≤250	°C	
7	Lead Soldering Time	-	≤10	s	

Table 2. Operating Environment

Electrical and optical characteristics below are defined under this operating environment, unless otherwise specified.

No.	Parameter	Symbol	Min.	Typ.	Max.	Unit	Remarks
1	Supply Voltage	V _{CC}	4.75	5.0	5.25	V	
2	Supply Voltage	V _{DD}	3.13	3.3	3.47	V	
3	Supply Voltage	V _{EE}	-4.94	-5.2	-5.45	V	
4	Supply Current	I _{CC}	-	-	0.8	A	+5 V
5	Supply Current	I _{DD}	-	-	2.0	A	+3.3 V
6	Supply Current	I _{EE}	-	-	1.8	A	-5.2 V
7	Power Consumption	P _{DS}	-	-	14	W	
8	Operating Temperature	T _C	(Note)	25	(Note)	°C	Case

Note: Target specification is minimum of 0 and maximum of 65.

Table 3. DC Power Supply

No.	Item	Symbol	Min.	Typ.	Max.	Unit
1	Positive Supply Voltage	V _{CC}	+4.75	+5.00	+5.25	V
2	Negative Supply Voltage	V _{EE}	-4.94	-5.20	-5.46	V
3	TEC Supply Voltage	V _{TT}	+3.15	+3.30	+3.45	V
4	Positive Supply Current	I _{CC}	-	-	400	mA
5	Negative Supply Current	I _{EE}	-	-	250	mA
6	TEC Supply Current	I _{TT}	-	-	1300	mA
7	Total Power Consumption	P _C	-	-	6.5	W

Table 4. Optical Characteristics

No.	Item	Symbol	Min.	Typ.	Max.	Unit	Remarks (Note 1)
1	Average Power Output	Pf	-3.5 -4.5	- -	+2.0 +2.0	dBm	Point S, Beginning of life Point S, End of life
2	Extinction Ratio	ER	10	-	-	dB	
3	Optical Waveform	-	Satisfying the Mask			-	Note 2
4	Optical Output at Shutdown	-	-	-	-40	dBm	
5	Center Wavelength	λ_c	1531.9	-	1562.23	nm	200 GHz Spacing
6	Variation in Center Wavelength	$\Delta\lambda$	-0.25		+0.25	nm	End of Life, TBD
7	Spectral Width (-20 dB)	$\Delta\lambda_{20}$	-	-	0.5	nm	
8	Side-mode Suppression Ratio	Sr	30	-	-	dB	

Note 1. Transmit Data: NRZ at 2.488320 Gbit/s, Mark 50%, PRBS=2²³-1,
Power Supply Voltage: Vcc = 5.0^{+0.25} V, Vee = -5.2^{+0.26} V, Vtt = 3.3^{+0.16}
Tc = 0 to 75°C

Note 2.

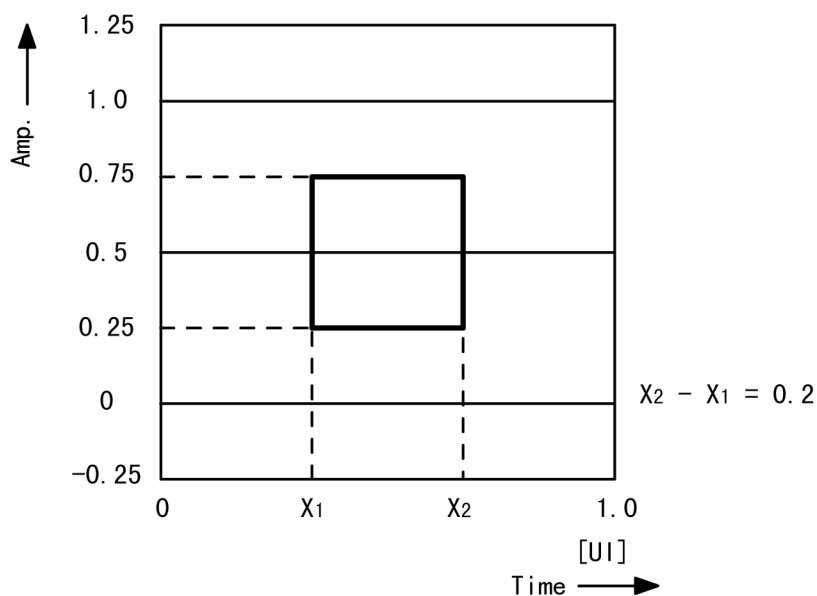


Fig. 4.1 Mask of Eye Diagram for the Optical Waveform through the 4th-order Bessel Filter According to ITU-T G957

Note 3.

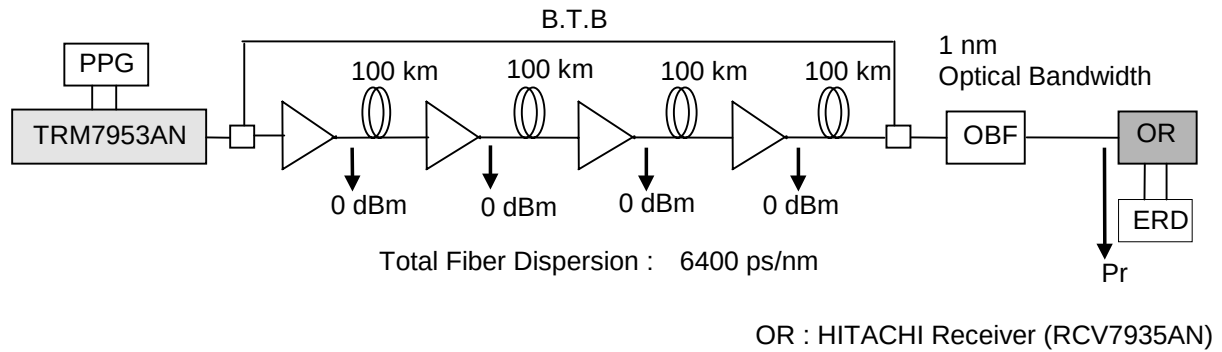


Fig 4.2 Optical Path Penalty Measurement Setup

Table 5 Input/Output Signal Interface

No.	Item	Min.	Typ.	Max.	Unit	Remarks (Note 1)
1	Optical Connector	FC-PC			-	
2	Data Input Impedance	50			Ω	AC-coupled
3	Input Data Voltage	Single	500	-	1000	mV peak to peak
		Differential	300	-	1000	
4	Clock Input Impedance	50			Ω	AC-coupled
5	Input Clock Voltage	Single	500	-	1000	mV peak to peak
		Differential	300	-	1000	
6	Input Clock Duty Cycle	40	50	60	%	
7	Setup time	-	-	75	ps	Note 2
8	Hold time	-	-	75	ps	Note 2
9	Shutdown Command Interface	TTL Level Active High			-	Note 3
10	Shutdown activation time	-	-	5	ms	
11	Shutdown deactivation time	-	-	250	ms	
12	Clock Mode Select Interface	High: Non-clocked mode Low: Clocked mode			-	Note 4
13	Temperature Deviation Alarm	TTL Level Active High			-	Note 5
14	Monitoring for LD bias current (BIAS(+))	-	20	-	mV/mA	
15	Monitoring for back facet PD current (BACK(+))	450	500	550	mV	Note 6

Note 1. Transmit Data: NRZ at 2.488320 Gbit/s, Mark 50%, PRBS=2²³-1,
 Power Supply Voltage: Vcc = 5.0^{+0.25} V, Vee = -5.2^{+0.26} V, Vtt = 3.3^{+0.16}
 Tc = 0 to 75°C

Note 2.

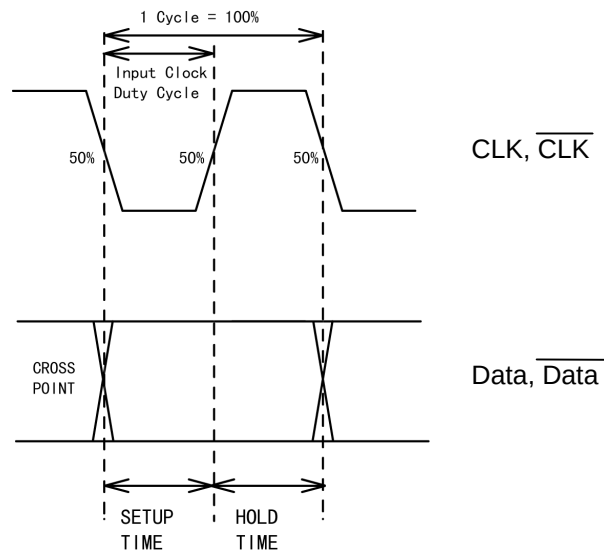


Fig. 5.1 Setup Time and Hold Time

Note 3.

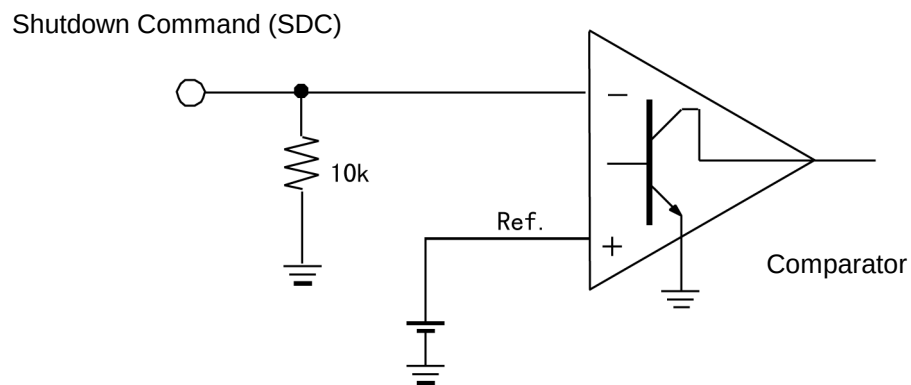


Fig. 5.2 Shutdown Command Interface

Note 4.

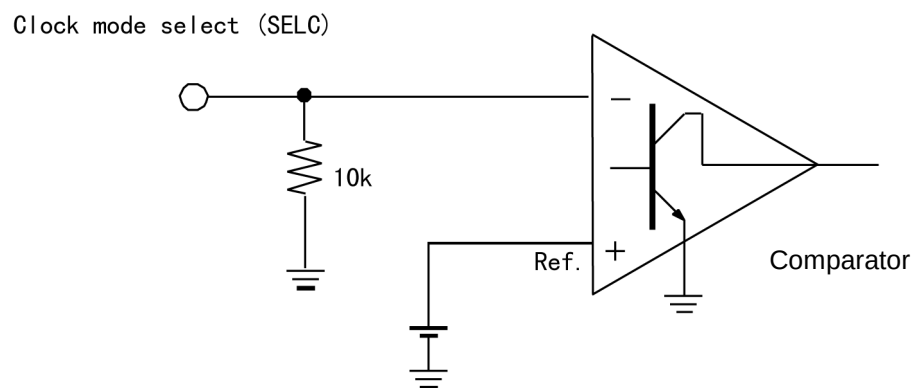


Fig. 5.3 Clock Mode Select Interface

Note 5.

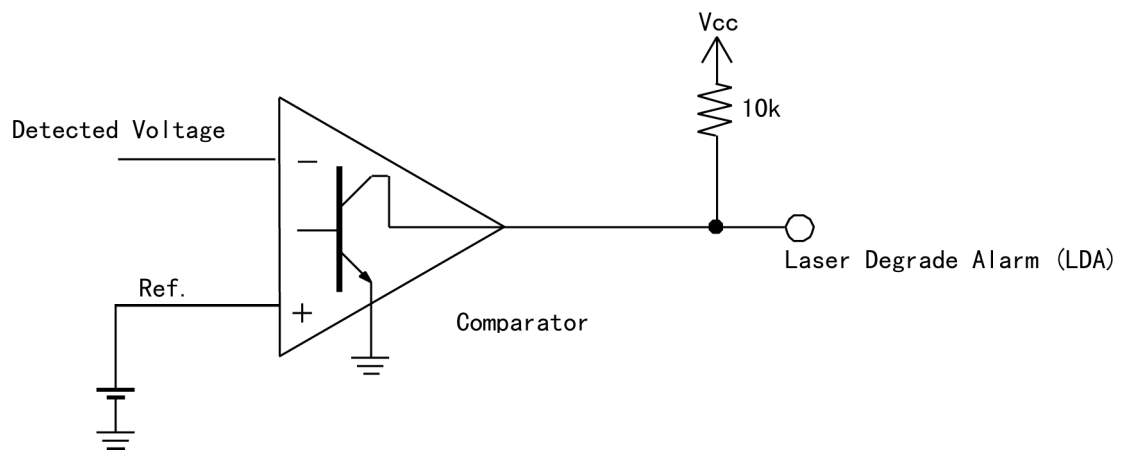


Fig. 5.4 Temperature Deviation Alarm Interface

Note 6.

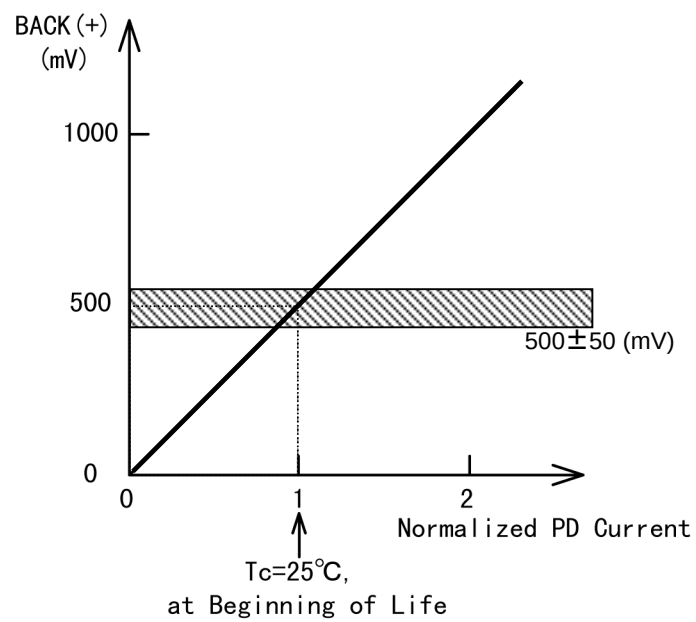


Fig. 5.5 Monitoring for Back Facet PD Activation


Table 6. Pin Configuration

Pin #	Symbol	I/O	Logic	Description	Remarks
1	GND			Ground	
2	BACK(+)			Monitoring for back facet PD current	
3	BIAS(+)			Monitoring for LD bias current	
4	SDC			Shutdown Command	
5	SELC			Clock mode select	
6	GND			Ground	
7	TDA			Temperature Deviation Alarm	
8	NUC			No User Connection	
9	NUC			No User Connection	
10	NUC			No User Connection	
11	GND			Ground	
12	Vee			Negative power supply	
13	Vcc			Positive power supply	
14	Vtt			TEC power supply	
15	GND			Ground	
16	DATA			True data input	
17	GND			Ground	
18	$\overline{\text{DATA}}$			False data input	
19	GND			Ground	
20	CLK			True clock input	
21	GND			Ground	
22	$\overline{\text{CLK}}$			False clock input	
23	GND			Ground	
24	Vcc			Positive power supply	
				Metal Case is at GND.	


Mechanical Dimensions

Dimensions: mm
Tolerance : ± 0.5 mm

■ Top view

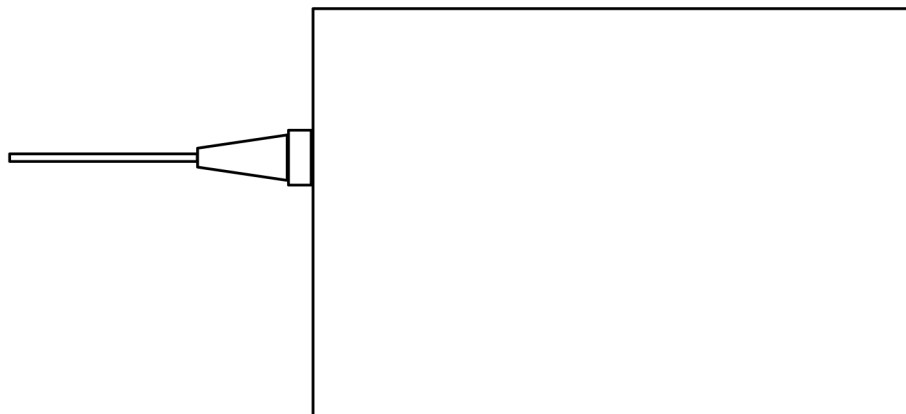

■ Side view

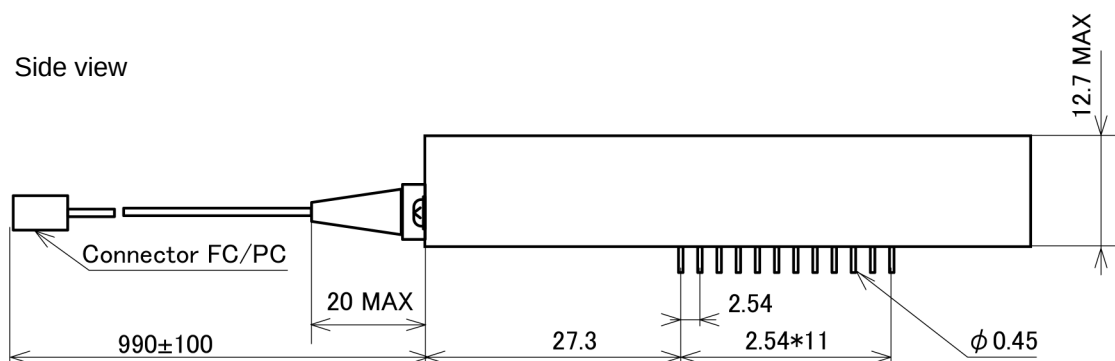

■ Bottom view

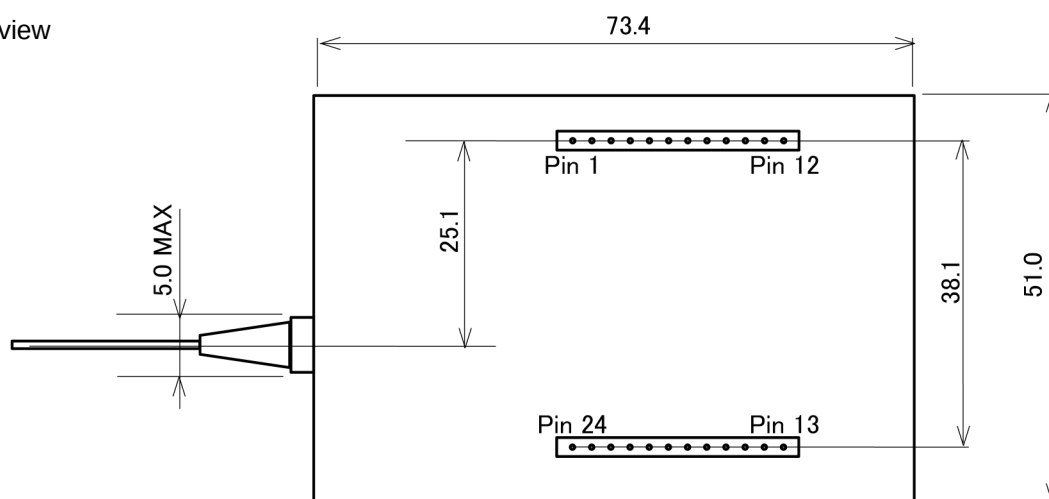


Table 6. Optical Fiber

No.	Item	Specifications	Unit
1	Type	SMF	-
2	Mode Field Diameter	9.5 ± 1	μm
3	Cladding Diameter	125 ± 3	μm
4	Minimum Bending Radius	30	mm
5	Fiber Tensile Strength	9.8	N
5	Outer Diameter of Secondary Coating	0.9 ± 0.1	mm

Table 7. Ordering Information

No.	Production Code	Center Wavelength (nm)	No.	Production Code	Center Wavelength (nm)
00	TRM7953AN	No Order	11	TRM7953AN4772	1547.72
01	TRM7953AN3190	1531.90	12	TRM7953AN4932	1549.32
02	TRM7953AN3347	1533.47	13	TRM7953AN5092	1550.92
03	TRM7953AN3504	1535.04	14	TRM7953AN5252	1552.52
04	TRM7953AN3661	1536.61	15	TRM7953AN5413	1554.13
05	TRM7953AN3819	1538.19	16	TRM7953AN5575	1555.75
06	TRM7953AN3977	1539.77	17	TRM7953AN5736	1557.63
07	TRM7953AN4135	1541.35	18	TRM7953AN5898	1558.98
08	TRM7953AN4294	1542.94	19	TRM7953AN6061	1560.61
09	TRM7953AN4453	1544.53	20	TRM7953AN6223	1562.23
10	TRM7953AN4612	1546.12			

USER INFORMATION

Handling Precautions

CAUTION: Take proper electrostatic-discharge (ESD) precautions while handling these devices. These devices are sensitive to ESD.

Laser Safety

This product complies with IEC 60825-1 Class 1.

HITACHIDocument number: **FOD-DS-00057**

Document Category: Product Specifications (Data Sheet)

Revision: 0.1 (June 2000)

Product Name: TRM7953AN

STM-16 1.5 μ m Optical Transmitter (for 200 GHz Spacing DWDM)
TRM7953AN

Revision History

Rev.	Date	Page/Line/Fig/Table	Modification	Note
0.1	June 22, 2000	-	-	