



FCIconnect.com

Copyright FCI

PRODUCT NUMBER BPS8B96ACD-00-----

WITH "LF" SUFFIX	LEAD FREE OR RoHS COMPATIBLE PRODUCT
WITHOUT SUFFIX	LEADED PRODUCT

WIRE ACCOMODATION		
PRODUCT NUMBER	WIRE SIZE	CONTACT IDENTIFICATION
BPS8B96ACD000---	AWG28/30	0
BPS8B96ACD200---	AWG24/26	2

CONTACT PLATING	
PLATING CODE	PERFORMANCE LEVEL PER DIN41612
Z0	CLASS 3
Z1	CLASS 2
E9	CLASS 1






NOTES:-
1. THE "LF" PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
2. LEAD FREE OR RoHS DIRECTIVE LABELING TO BE PROVIDED AS PER GS-14-920 FOR RoHS COMPATIBLE VERSION.


PERFORMANCES CHARACTERISTICS
VOLTAGE RATING : 250 VAC (rms)
CURRENT RATING : 1,5 A AT 25 °C, 1 A AT 70 °C.
INSULATION RESISTANCE : 1000 MΩ INITIAL, 100 MΩ MIN. AFTER TEST
DIELECTRIC WITH-
STANDING VOLTAGE : 1000 VAC (rms).
CONTACT RESISTANCE : 15 mΩ MAX. INITIAL, 5 mΩ MAX. RISE OF INITIAL VALUE AFTER TEST.
OPERATING TEMPERATURE*: -40 °C TO +125 °C.
INSERTION FORCE : 1 N MAX./CONTACT.
WITHDRAWAL FORCE : 0,2 N MIN./CONTACT.
*DEPENDING ON THE CABLE, THE MAX. TEMPERATURE CAN BE LOWER.
FOR STANDARD PVC INSULATED CABLE : 105 °C MAX.

CONSTRUCTION
BODY MATERIAL : GLASS-REINFORCED THERMOPLASTIC (UL94V-0).
CONTACT MATERIAL : PHOSPHOR BRONZE.
CONTACT FINISH : Au OVER Ni IN CONTACT AREA
SnPb ON I.D.C. TERMINAL FOR LEADED PRODUCTS.
Sn (MATTE TIN) ON I.D.C. TERMINAL FOR LEAD FREE PRODUCTS.
Z0 : PERFORMANCE LEVEL PER DIN41612 CLASS 3
Z1 : PERFORMANCE LEVEL PER DIN41612 CLASS 2
E9 : PERFORMANCE LEVEL PER DIN41612 CLASS 1
OTHERS : CONSULT FCI

PART NUMBERS
BPS8B96ACD000--- CONNECTOR FOR WIRE SIZE AWG28, AWG30.
(CONTACT IDENTIFICATION : 0).
BPS8B96ACD200--- CONNECTOR FOR WIRE SIZE AWG24, AWG26
(CONTACT IDENTIFICATION : 2).
AWG WIRE SIZE MARKING
BPS8B96ACD000--- : 28/30.
BPS8B96ACD000---LF : 28/30.
BPS8B96ACD200--- : 24/26.
BPS8B96ACD200---LF : 24/26.

DATECODE MARKING
A + YEAR & WEEKCODE, EXAMPLE : A9950.

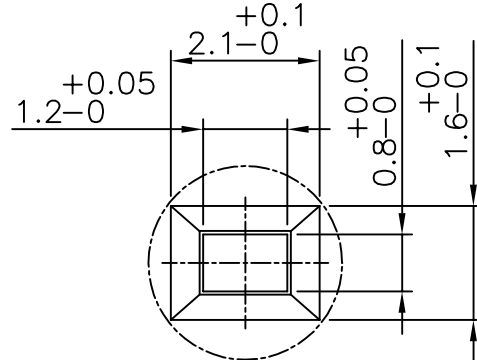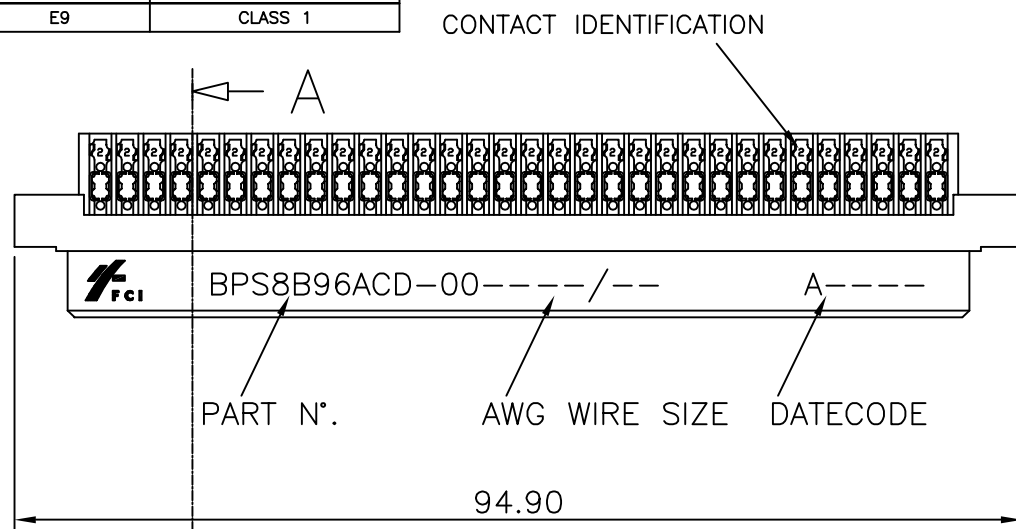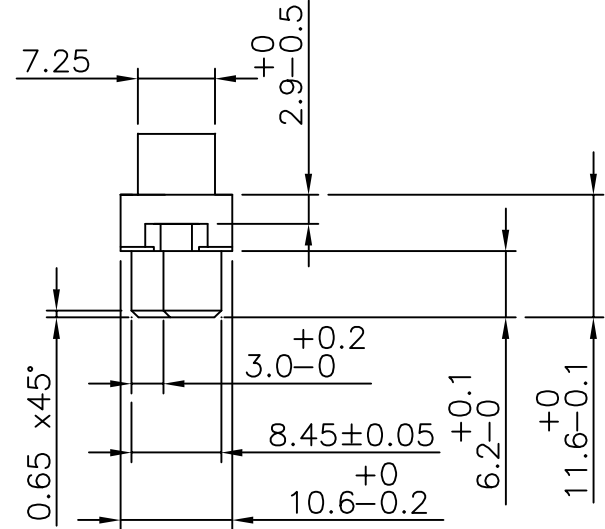

mat'l. code SEE NOTE				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family BPS8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
ltr	ecn no	dr	date	tolerances unless otherwise specified						title ASSY BPS8 96 POS. A,C LOADED																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
A	F00819	DLE	2000-10-20	angles	linear	0.1±0.2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
B	I05-0123	MINI	2005-07-27			0.01±0.1																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
C	I06-0067	MINI	2006-06-01	±1°				scale —																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				dr	D.LEGRAND		2000-10-20				dwg no						sheet 1 of 6		size																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
				engr	J.F.NOTTEAU		2000-10-20				55359								A3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
				chr	RAKHEE GEORGE		2006-06-01																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
				appd	RAKHEE GEORGE		2006-06-01																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
sheet index		revision sheet		C	C	C	C	C	C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				



FCIconnect.com

Copyright FCI




PRODUCT NUMBER BPS8B96ACD100L9

LEADED PRODUCT

PRODUCT NUMBER BPS8B96ACD100L9LF

LEAD FREE OR RoHS COMPATIBLE PRODUCT

NOTES:-
1. THE "LF" PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
2. LEAD FREE OR RoHS DIRECTIVE LABELING TO BE PROVIDED AS PER GS-14-920 FOR RoHS COMPATIBLE VERSION.

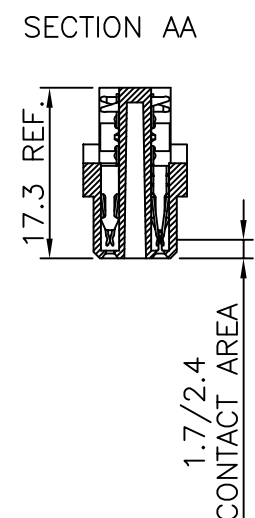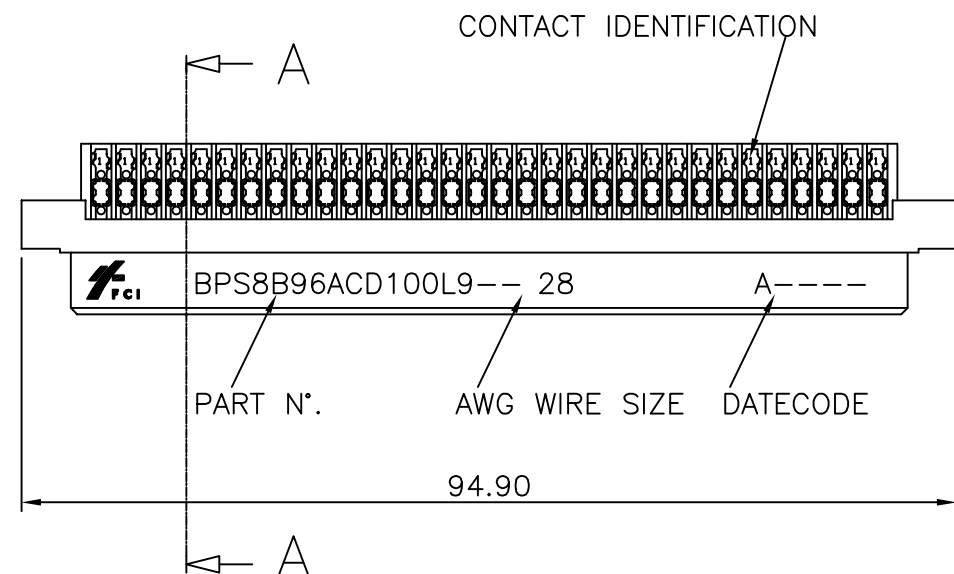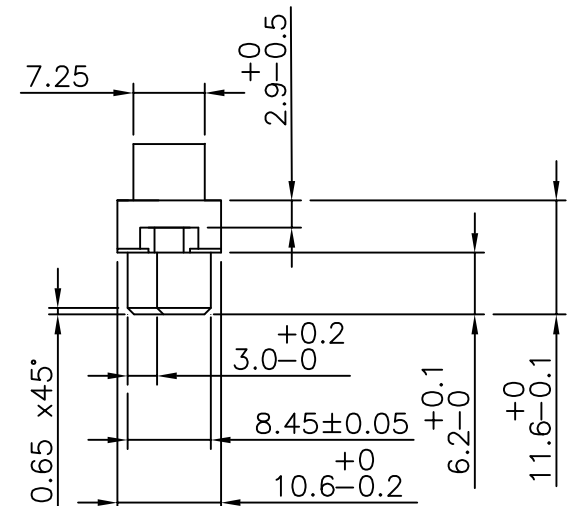

PERFORMANCES CHARACTERISTICS

- VOLTAGE RATING : 250 VAC (rms)
- CURRENT RATING : 1,5 A AT 25 °C, 1 A AT 70 °C.
- INSULATION RESISTANCE : 1000MΩINITIAL, 100MΩMIN. AFTER TEST
- DIELECTRIC WITH-
 - STANDING VOLTAGE : 1000 VAC (rms).
 - CONTACT RESISTANCE : 15mΩMAX.INITIAL, 5mΩMAX. RISE OF INITIAL VALUE AFTER TEST.
- OPERATING TEMPERATURE*: -40 °C TO +125 °C.
- INSERTION FORCE : 1 N MAX./CONTACT.
- WITHDRAWAL FORCE : 0,2 N MIN./CONTACT.

*DEPENDING ON THE CABLE, THE MAX. TEMPERATURE CAN BE LOWER.
FOR STANDARD PVC INSULATED CABLE : 105 °C MAX.

CONSTRUCTION

- BODY MATERIAL : GLASS-REINFORCED THERMOPLASTIC (UL94V-0).
- CONTACT MATERIAL : PHOSPHOR BRONZE.
- CONTACT FINISH : 1.25 μm Au MIN. OVER 2 μm Ni MIN. IN CONTACT AREA
 - SnPb ON I.D.C. TERMINAL FOR LEADED PRODUCTS
 - Sn (MATTE TIN) ON I.D.C. TERMINAL FOR LEAD FREE PRODUCTS

CABLE : 3M FLEXIBLE TWISTED PAIR CABLE (WIRES & CABLE) TYPE 3782 PER UL STYLE/20488 OR TYPE 3783 PER UL STYLE/2935.

PART NUMBERS


BPS8B96ACD100L9-----CONNECTOR FOR WIRE SIZE AWG28
(CONTACT IDENTIFICATION : 1).

AWG WIRE SIZE MARKING


BPS8B96ACD100L9 : 28
BPS8B96ACD100L9LF : 28


DATECODE MARKING

A + YEAR & WEEKCODE, EXAMPLE : A9950.






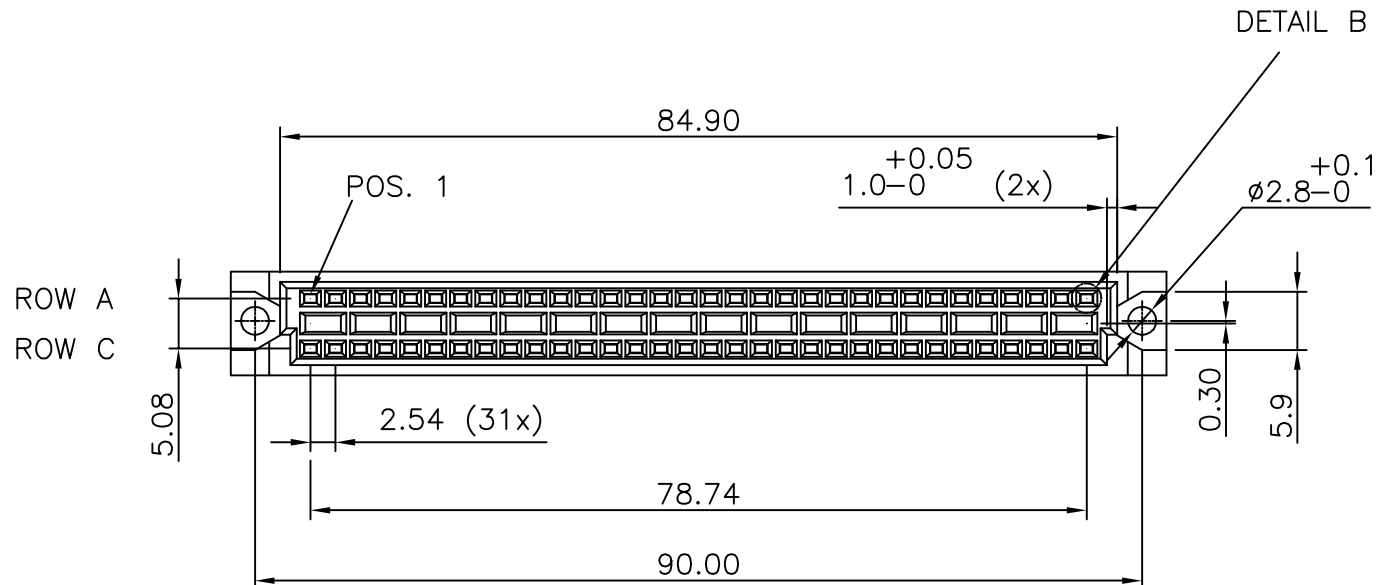


DETAIL B

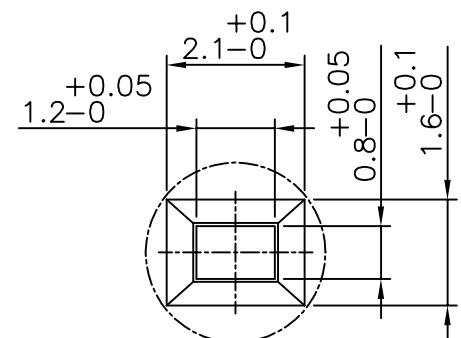

mat'l. code SEE NOTE				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family BPS8										
ltr	ecn no	dr	date	tolerances unless		otherwise specified				title ASSY BPS8 96 POS. A,C LOADED										
A	F00819	DLE	2000-10-20	angles	linear	0.1±0.2														
B	I05-0123	MINI	2005-07-27			0.01±0.1														
C	I06-0067	MINI	2006-06-01	±1°				scale —												
				dr	D.LEGRAND		2000-10-20				dwg no				sheet 3 of 6				size	
				engr	J.F.NOTTEAU		2000-10-20				55359				A3					
				chr	RAKHEE GEORGE		2006-06-01													
				appd	RAKHEE GEORGE		2006-06-01													
sheet index		revision sheet																		

form: A3

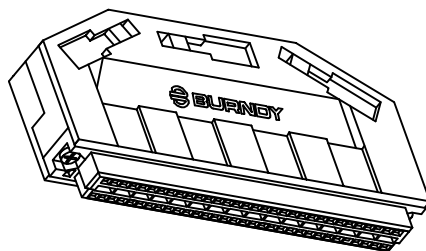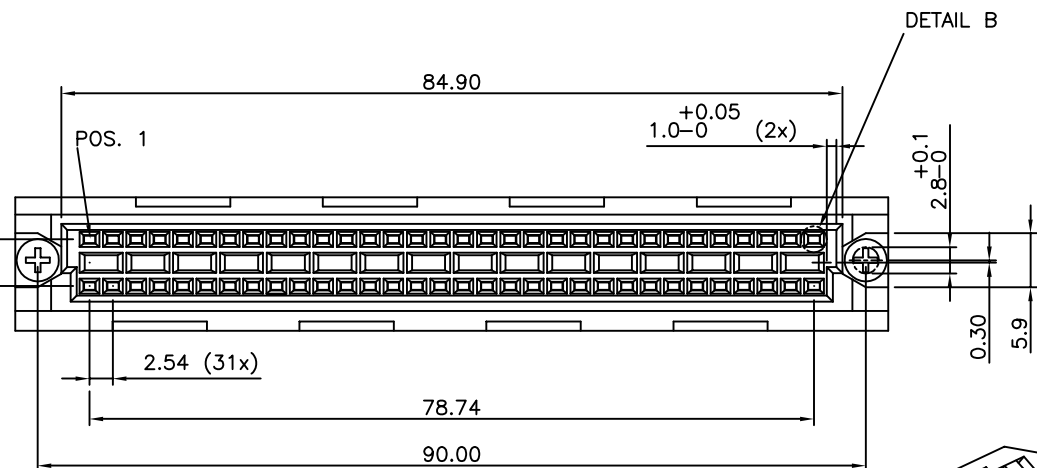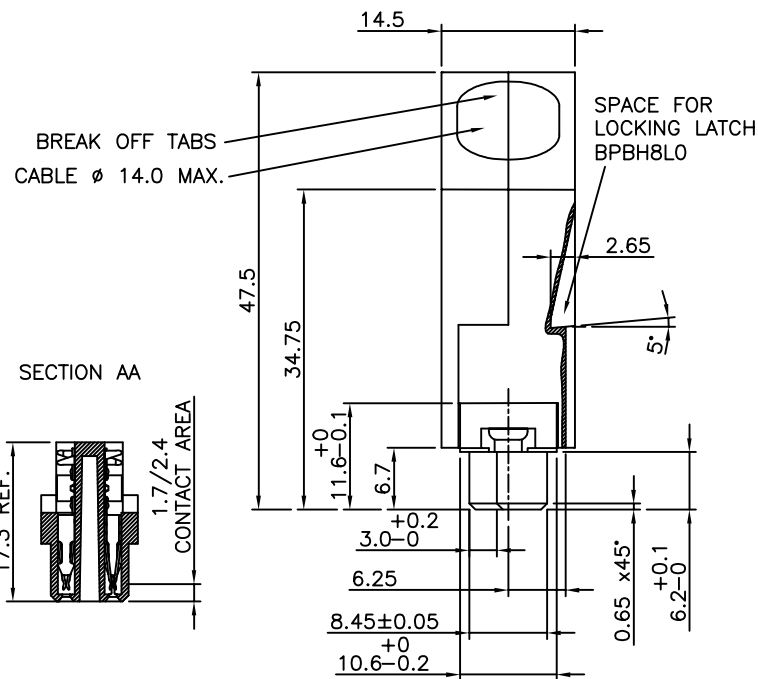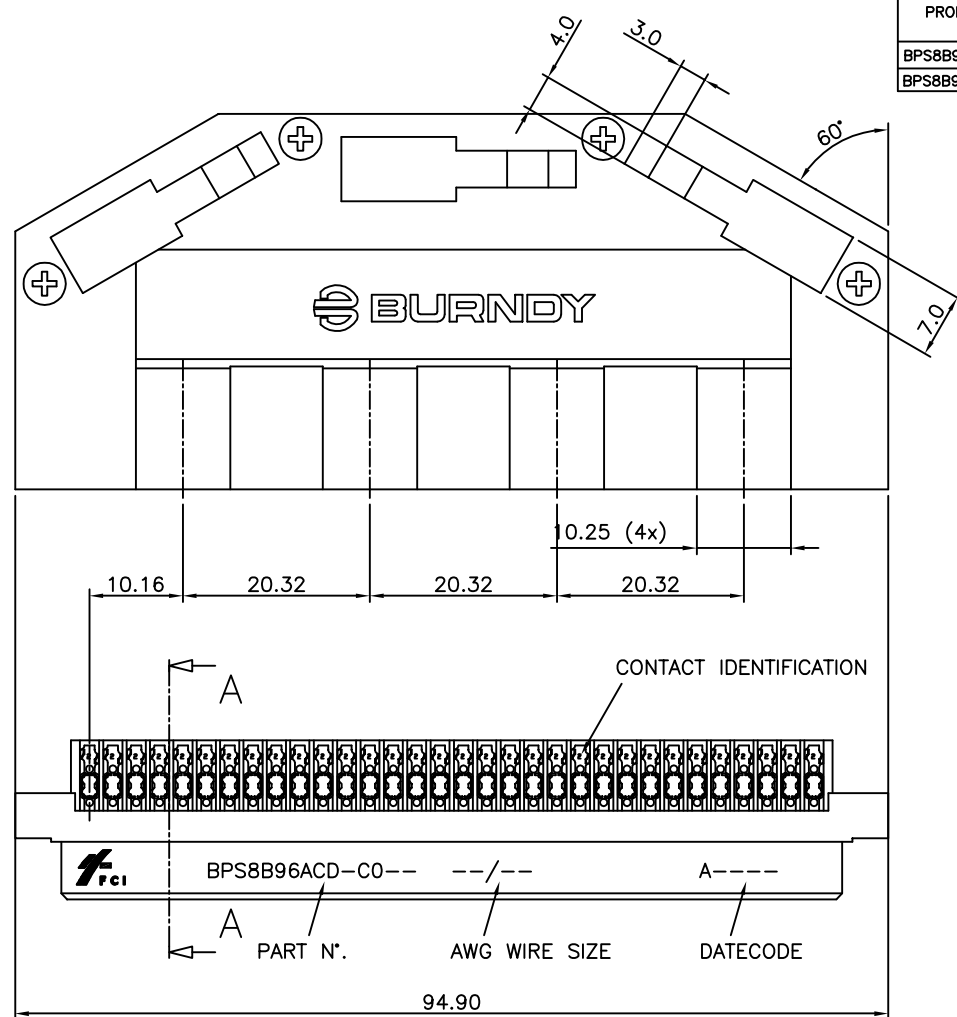

PRODUCT NUMBER		BPS8B96ACD-C0----
WITH "LF" SUFFIX		LEAD FREE OR RoHS COMPATIBLE PRODUCT
WITHOUT SUFFIX		LEADED PRODUCT

WIRE ACCOMODATION		
PRODUCT NUMBER	WIRE SIZE	CONTACT IDENTIFICATION
BPS8B96ACD0C0--	AWG28/30	0
BPS8B96ACD2C0--	AWG24/26	2

CONTACT PLATING	
PLATING CODE	PERFORMANCE LEVEL PER DIN41612
Z0	CLASS 3
Z1	CLASS 2
E9	CLASS 1

NOTES:-
 1. THE "LF" PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 2. LEAD FREE OR RoHS DIRECTIVE LABELING TO BE PROVIDED AS PER GS-14-920 FOR RoHS COMPATIBLE VERSION.

PERFORMANCES CHARACTERISTICS

VOLTAGE RATING : 250 VAC (rms)
 CURRENT RATING : 1,5 A AT 25 °C, 1 A AT 70 °C.
 INSULATION RESISTANCE : 1000MΩINITIAL, 100MΩMIN. AFTER TEST
 DIELECTRIC WITH-
 STANDING VOLTAGE : 1000 VAC (rms).
 CONTACT RESISTANCE : 15mΩMAX. INITIAL, 5mΩMAX. RISE OF INITIAL VALUE AFTER TEST.
 OPERATING TEMPERATURE*: -40 °C TO +125 °C.
 INSERTION FORCE : 1 N MAX./CONTACT.
 WITHDRAWAL FORCE : 0,2 N MIN./CONTACT.
 *DEPENDING ON THE CABLE, THE MAX. TEMPERATURE CAN BE LOWER.
 FOR STANDARD PVC INSULATED CABLE : 105 °C MAX.

CONSTRUCTION

BODY MATERIAL : GLASS-REINFORCED THERMOPLASTIC (UL94V-0).
 COVER MATERIAL : POLYPHENYLENE (PPO), COLOUR : BLACK.
 CONTACT MATERIAL : PHOSPHOR BRONZE.
 CONTACT FINISH : Au OVER Ni IN CONTACT AREA
 SnPb ON I.D.C. TERMINAL FOR LEADED PRODUCTS.
 Sn (MATTE TIN) ON I.D.C. TERMINAL FOR LEAD FREE PRODUCTS.
 Z0 : PERFORMANCE LEVEL PER DIN41612 CLASS 3
 Z1 : PERFORMANCE LEVEL PER DIN41612 CLASS 2
 E9 : PERFORMANCE LEVEL PER DIN41612 CLASS 1
 OTHERS : CONSULT FCI
 TIE-WRAP : OPTIONAL (PART N°. TF4)

PART NUMBERS


BPS8B96ACD0C0---- CONNECTOR FOR WIRE SIZE AWG28, AWG30.
 (CONTACT IDENTIFICATION : 0).
 BPS8B96ACD2C0---- CONNECTOR FOR WIRE SIZE AWG24, AWG26
 (CONTACT IDENTIFICATION : 2).


AWG WIRE SIZE MARKING

BPS8B96ACD0C0-- : 28/30.
 BPS8B96ACD0C0--LF : 28/30.
 BPS8B96ACD2C0-- : 24/26.
 BPS8B96ACD2C0--LF : 24/26.





DATECODE MARKING

A + YEAR & WEEKCODE, EXAMPLE : A9950.

mat'l. code SEE NOTE				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family BPS8										
ltr		ecn no		dr	date	tolerances unless otherwise specified				title ASSY BPS8 96 POS. A,C LOADED										
A	F00819	DLE	2000-10-23	angles	linear	0.1±0.2														
B	I05-0123	MINI	2005-07-27			0.01±0.1														
C	I06-0067	MINI	2006-06-01			±1°														
						dr	D.LEGRAND	2000-10-23			dwg no				sheet 4 of 6				size	
						enr	J.F.NOTTEAU	2000-10-23			55359				A3					
						chr	RAKHEE GEORGE	2006-06-01			type Product Customer Drawing									
						appd	RAKHEE GEORGE	2006-06-01												
sheet index		revision sheet																		

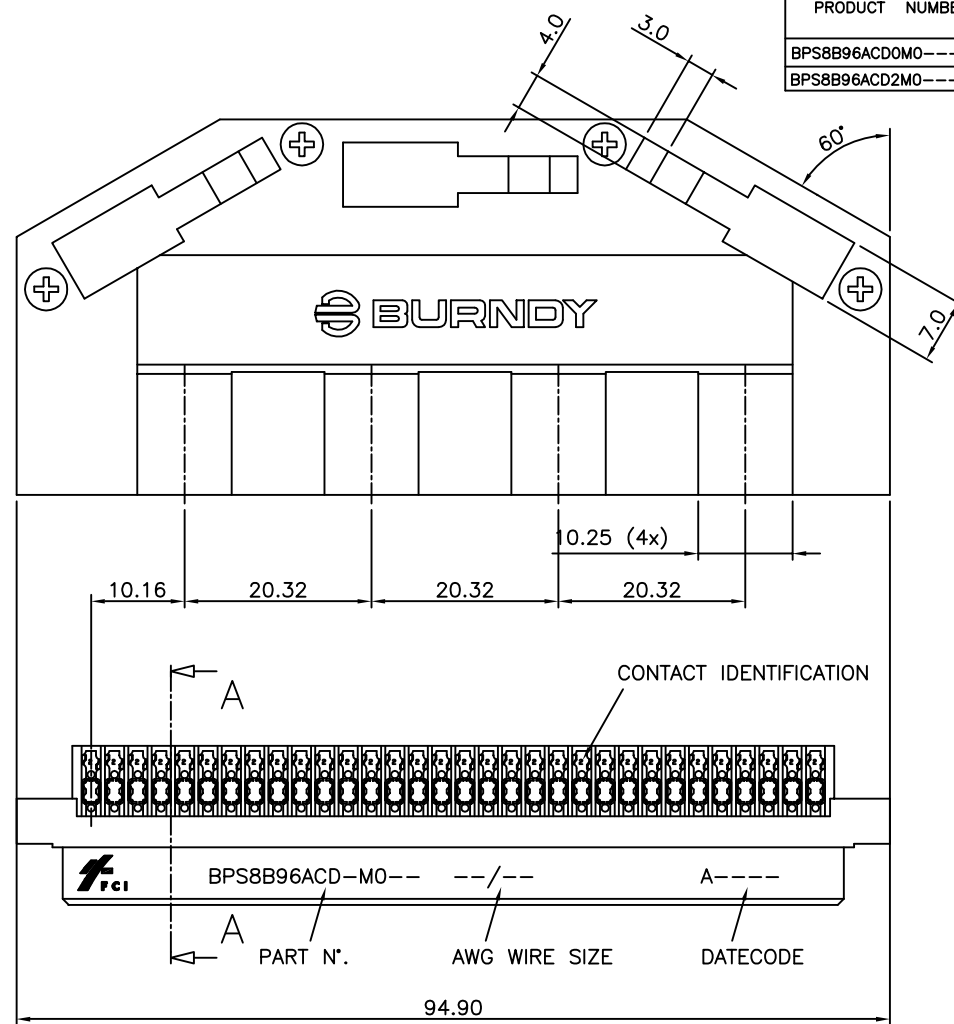

CABLE Ø 14.0 MAX.
BREAK OFF TABS

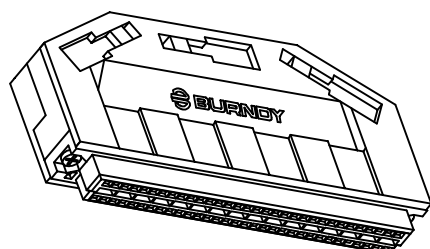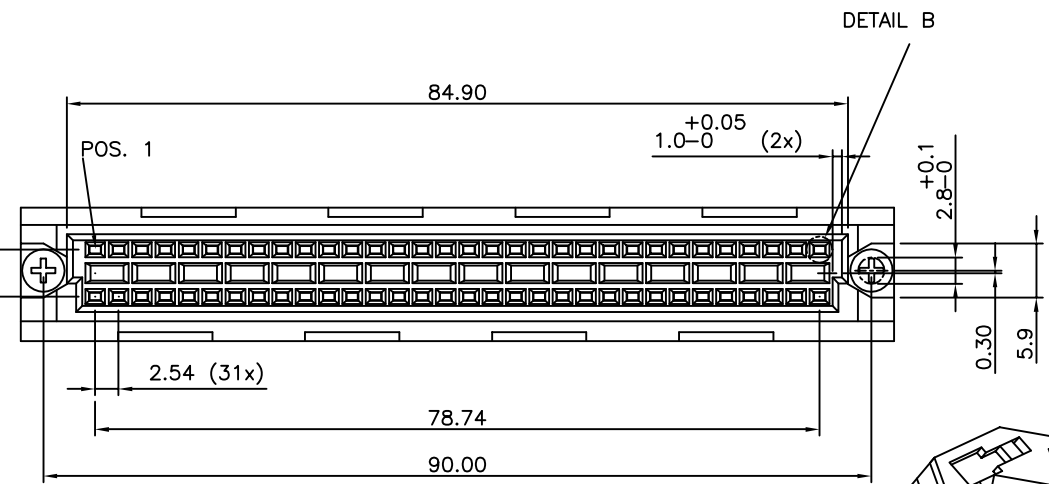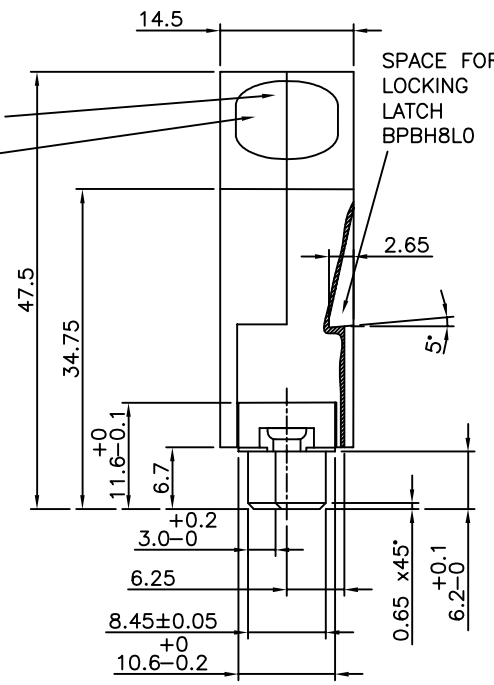

PRODUCT NUMBER		
BPS8B96ACD-M0----		
WIRE ACCOMODATION		
PRODUCT NUMBER	WIRE SIZE	CONTACT IDENTIFICATION
BPS8B96ACD0M0----	AWG28/30	0
BPS8B96ACD2M0----	AWG24/26	2

WITH "LF" SUFFIX	LEAD FREE OR RoHS COMPATIBLE PRODUCT
WITHOUT SUFFIX	LEADED PRODUCT

CONTACT PLATING	
PLATING CODE	PERFORMANCE LEVEL PER DIN41612
Z0	CLASS 3
Z1	CLASS 2
E9	CLASS 1

NOTES:-
 1. THE "LF" PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 2. LEAD FREE OR RoHS DIRECTIVE LABELING TO BE PROVIDED AS PER GS-14-920 FOR RoHS COMPATIBLE VERSION.

PERFORMANCES CHARACTERISTICS

VOLTAGE RATING : 250 VAC (rms)
 CURRENT RATING : 1,5 A AT 25 °C, 1 A AT 70 °C.
 INSULATION RESISTANCE : 1000 MΩ INITIAL, 100 MΩ MIN. AFTER TEST DIELECTRIC WITH-
 STANDING VOLTAGE : 1000 VAC (rms).
 CONTACT RESISTANCE : 15 mΩ MAX. INITIAL, 5 mΩ MAX. RISE OF INITIAL VALUE AFTER TEST.
 OPERATING TEMPERATURE*: -40 °C TO +125 °C.
 INSERTION FORCE : 1 N MAX./CONTACT.
 WITHDRAWAL FORCE : 0,2 N MIN./CONTACT.
 *DEPENDING ON THE CABLE, THE MAX. TEMPERATURE CAN BE LOWER.
 FOR STANDARD PVC INSULATED CABLE : 105 °C MAX.

CONSTRUCTION

BODY MATERIAL : GLASS-REINFORCED THERMOPLASTIC (UL94V-0).
 COVER MATERIAL : Ni PLATED ABS MATERIAL.
 CONTACT MATERIAL : PHOSPHOR BRONZE.
 CONTACT FINISH : Au OVER Ni IN CONTACT AREA
 SnPb ON I.D.C. TERMINAL FOR LEADED PRODUCTS.
 Sn (MATTE TIN) ON I.D.C. TERMINAL FOR LEAD FREE PRODUCTS.

Z0 : PERFORMANCE LEVEL PER DIN41612 CLASS 3
 Z1 : PERFORMANCE LEVEL PER DIN41612 CLASS 2
 E9 : PERFORMANCE LEVEL PER DIN41612 CLASS 1
 OTHERS : CONSULT FCI

TIE-WRAP : OPTIONAL (PART N°. TF4)

PART NUMBERS



BPS8B96ACD0M0----- CONNECTOR FOR WIRE SIZE AWG28, AWG30.
 (CONTACT IDENTIFICATION : 0).
 BPS8B96ACD2M0----- CONNECTOR FOR WIRE SIZE AWG24, AWG26
 (CONTACT IDENTIFICATION : 2).


AWG WIRE SIZE MARKING

BPS8B96ACD0M0-- : 28/30.
 BPS8B96ACD0M0--LF : 28/30.
 BPS8B96ACD2M0-- : 24/26.
 BPS8B96ACD2M0--LF : 24/26.

DATECODE MARKING

A + YEAR & WEEKCODE, EXAMPLE : A9950.

mat'l. code SEE NOTE				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family BPS8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
ltr	ecn no		dr	date		tolerances unless otherwise specified				title ASSY BPS8 96 POS. A,C LOADED																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
A	F00819		DLE	2000-10-23		angles														linear		0.1±0.2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
B	I05-0123		MINI	2005-07-27		±1°		linear		0.01±0.1		scale —		dwg no 55359																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
C	I06-0067		MINI	2006-06-01																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
						dr	D.LEGRAND			2000-10-23		sheet 5 of 6																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
						engr	J.F.NOTTEAU			2000-10-23																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
						chr	RAKHEE GEORGE			2006-06-01		size A3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
						appd	RAKHEE GEORGE			2006-06-01																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
sheet index		revision sheet																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												

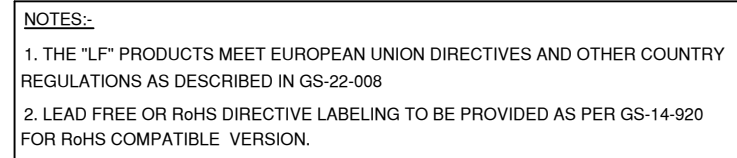

VOLTAGE RATING : 250 VAC (rms)
CURRENT RATING : 1,5 A AT 25 °C, 1 A AT 70 °C.
INSULATION RESISTANCE : 1000MΩINITIAL, 100MΩ MIN. AFTER TEST
DIELECTRIC WITH—
STANDING VOLTAGE : 1000 VAC (rms).
CONTACT RESISTANCE : 15mΩMAX. INITIAL, 5mΩMAX. RISE
OF INITIAL VALUE AFTER TEST.

*DEPENDING ON THE CABLE, THE MAX. TEMPERATURE CAN BE LOWER.
FOR STANDARD PVC INSULATED CABLE : 105 °C MAX.

BODY MATERIAL : GLASS-REINFORCED THERMOPLASTIC (UL94V-0).
COVER MATERIAL : POLYPHENYLENE (PPO), COLOUR : BLACK.
CONTACT MATERIAL : PHOSPHOR BRONZE.

CONTACT FINISH : 1.25 μ m Au MIN. OVER 2 μ m Ni MIN. IN CONTACT AREA

SnPb ON I.D.C. TERMINAL FOR LEADED PRODUCTS

Sn (MATTE TIN) ON I.D.C. TERMINAL FOR LEAD FREE PRODUCTS

CABLE : AWG24 & AWG26 (CONTACT IDENTIFICATION = 2).
TIE-WRAP : OPTIONAL (PART N°. TF4)

PART NUMBERS

BPS8B96ACD2C5L9-- CONNECTOR FOR WIRE SIZE AWG24, AWG26

(CONTACT IDENTIFICATION : 2).



AWG WIRE SIZE MARKING

BPS8B96ACD2C5L9 : 24/26

BPS8B96ACD2C5L9LF : 24/26

DATECODE MARKING

A + YEAR & WEEKCODE, EXAMPLE : A9950.

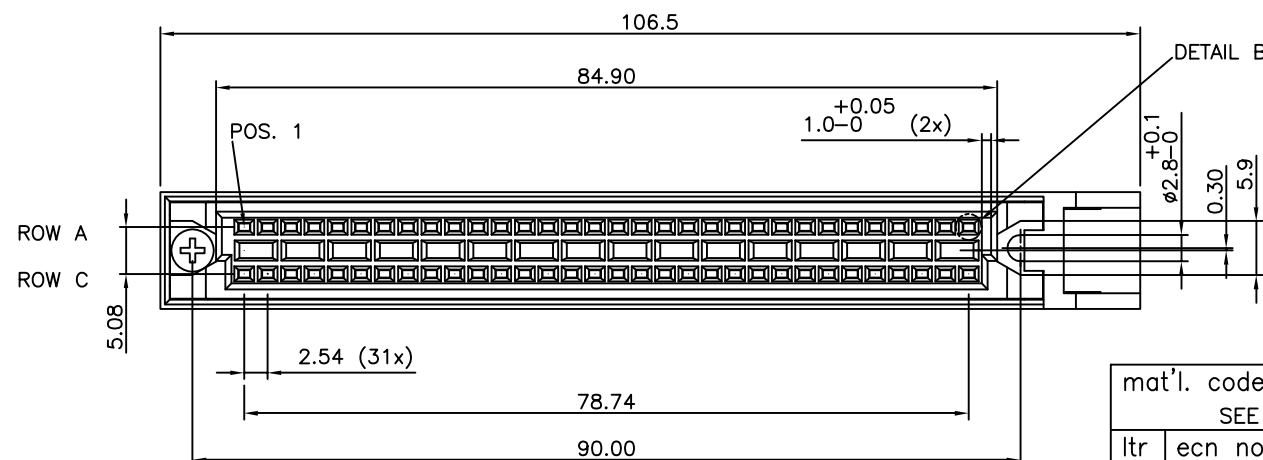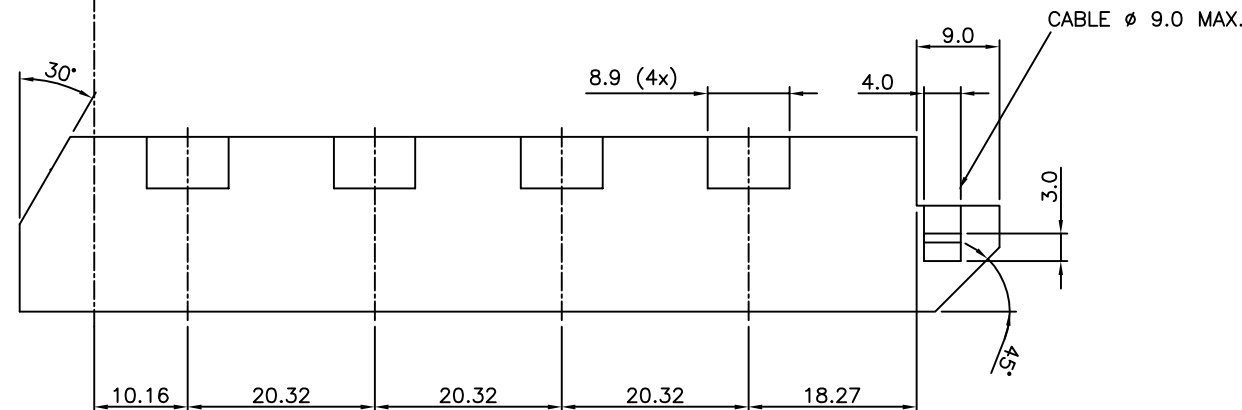[illegible]