

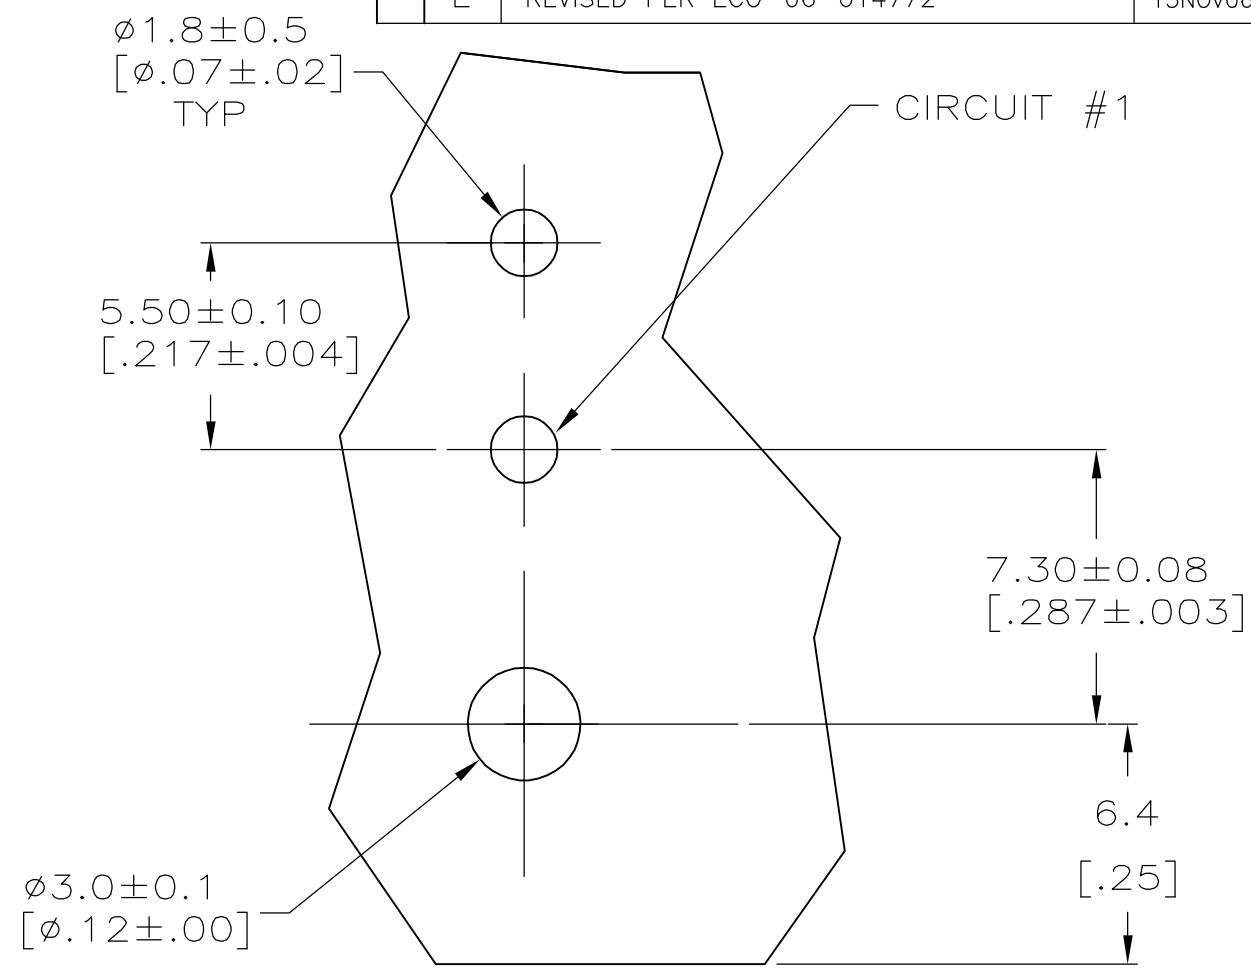
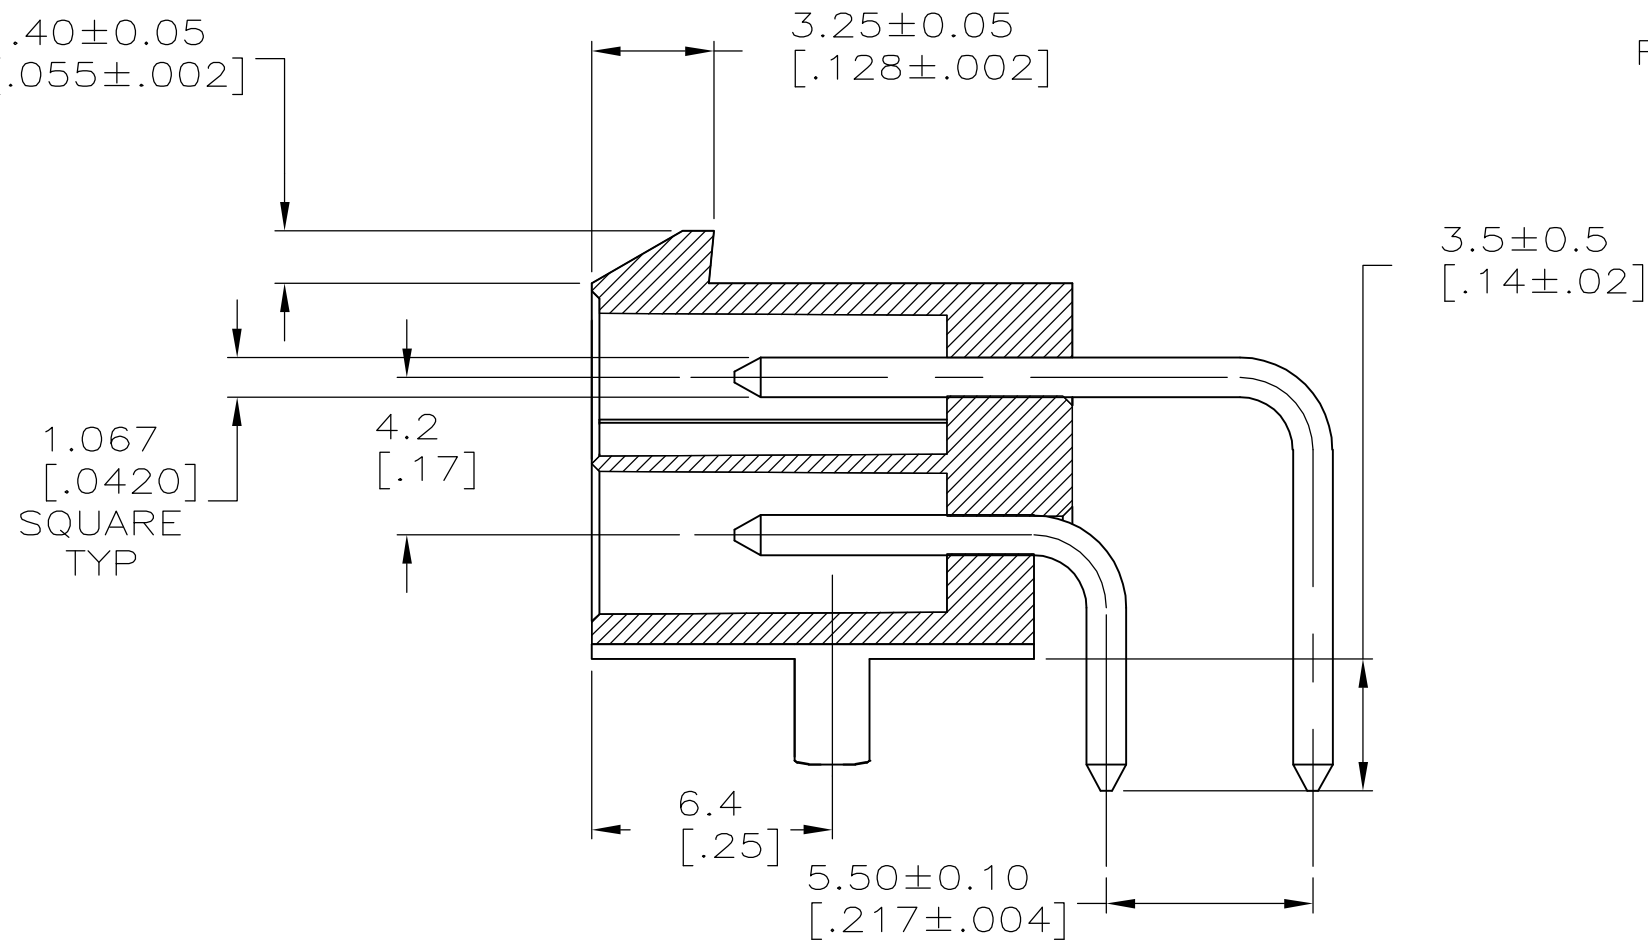


LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			E	REVISED PER ECO-06-014772	13NOV06	KW	DC

- 1 MATERIAL: HOUSING — NYLON, UL94V-0 (COLOR-WHITE).
PIN — 1.067mm² [.0017in²] COPPER ALLOY.
- 2 PINS TO COMPLY WITH SOLDERABILITY SPEC 109-11-3.
- 3 0.00381 [.000150] MINIMUM TIN LEAD OVER 0.00127 [.000050] MINIMUM NICKEL, ENTIRE LENGTH OF PIN.
- 4 NOTE DELETED.
- 5 0.00381 [.000150] MINIMUM TIN OVER 0.00127 [.000050] MINIMUM NICKEL, ENTIRE LENGTH OF PIN.

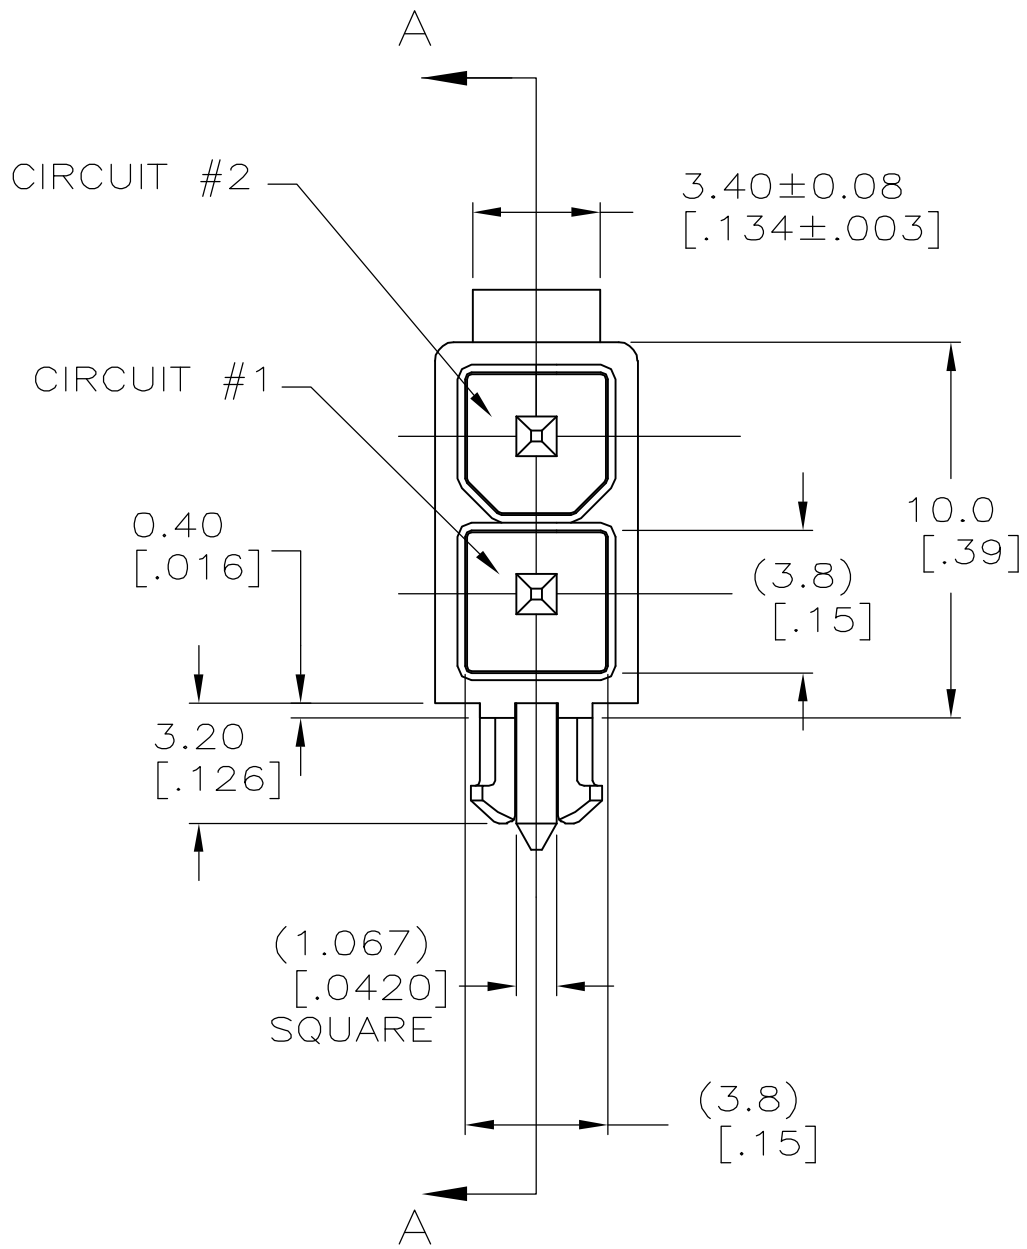

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.78 [.070] MAX THICK P.C. BOARD
COMPONENT SIDE SHOWN

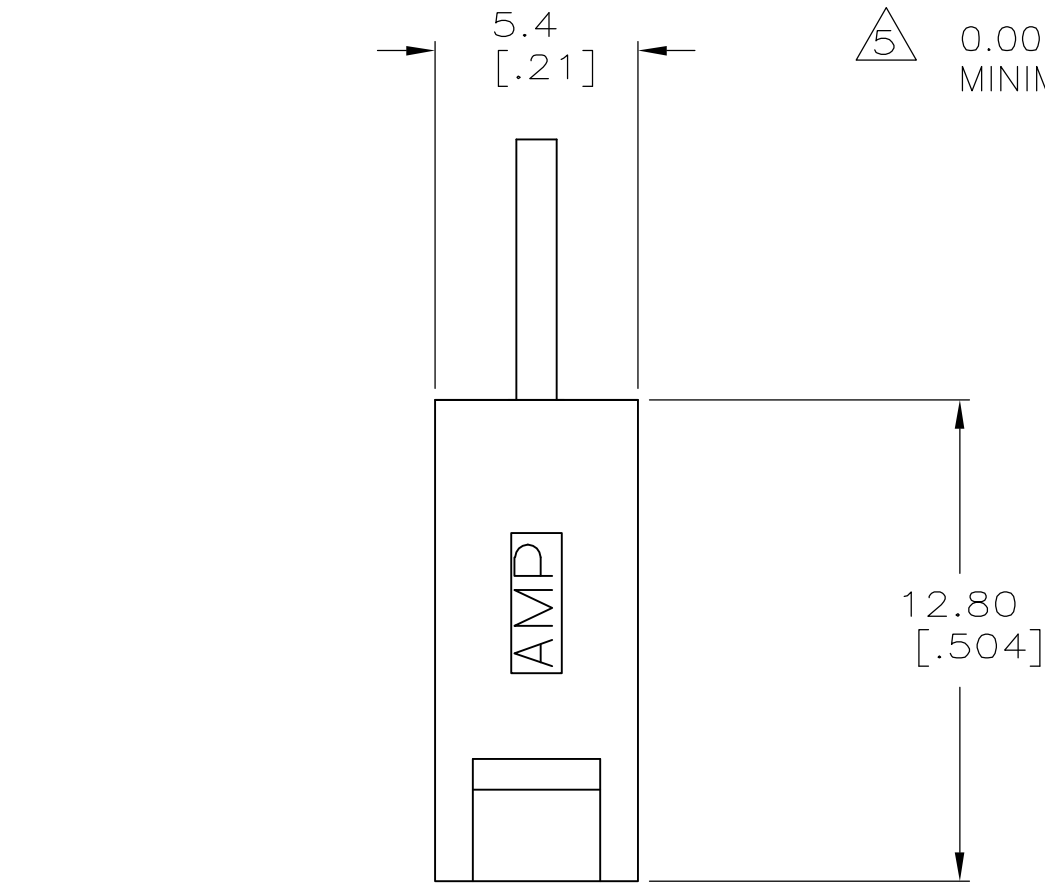

SECTION A-A

SUPERSEDED BY 1-794526-1

1	5	1	1	1-794526-1
1	3	1	1	794526-1
MATERIAL		FINISH	MATERIAL	COLOR
PIN		HOUSING		ASSEMBLY

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN S. HOOVER 02-MAR-2005		tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105-3608					
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK D. COLEY 02-MAR-2005		NAME ASSEMBLY, HEADER, RIGHT ANGLE, 2 POSITION, W/PEGS, 94V-0, AMP-DUAC(TM) POWER CONNECTOR					
		APVD D. COLEY 02-MAR-2005		PRODUCT SPEC 108-1646							
		APPLICATION SPEC 114-6067		SIZE							
		WEIGHT		CAGE CODE							
MATERIAL SEE CHART		FINISH SEE CHART		CUSTOMER DRAWING		DRAWING NO A2 00779		RESTRICTED TO C=794526			
						SCALE 5:1		SHEET 1 OF 1		REV E	