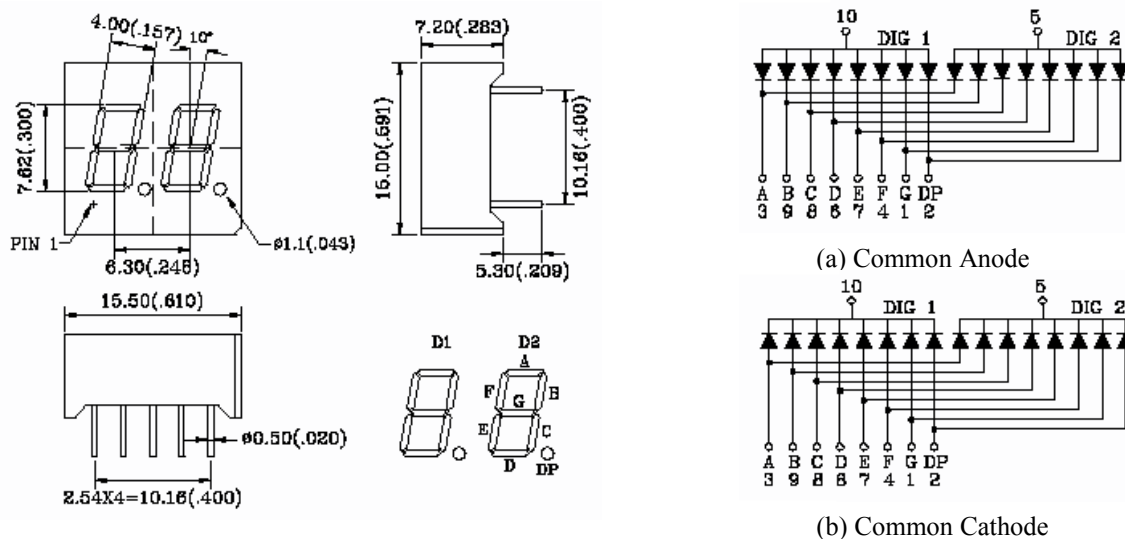


SEVEN SEGMENT DISPLAY – 7.6 mm (0.3 INCH), Dual

DATA SHEET 3555 REV.

Notes: All dimensions are in mm, tolerance is ± 0.25 mm (0.01") unless otherwise specified**Absolute Maximum Ratings $T_a=25^\circ\text{C}$**

Parameter	Green	Unit
Power dissipation per segment	60	mw
Peak forward current per segment*	80	mA
Continuous forward current per segment	15	mA
Reverse voltage per segment	5	V
Operating temperature range	-35~85	$^\circ\text{C}$
Storage temperature range	-35~85	$^\circ\text{C}$
Solder temperature 1/16 inch below seating plane for 3 seconds at 260°C		

* 1/10 duty cycle 10 ms pulse width

Electro-optical Characteristic: ($T_a=25^\circ\text{C}$)

Part No.		Chip Material	Color	Wavelength	Iv (mcd)	Note
Common Anode	Common Cathode			(nm)	Typ. 20mA	
LN2003-G-AG	LN2003-G-CG	GaP	Green	572	5	
LN2003-RE-AG	LN2003-RE-CG	GaAsP	Red	635	5	
LN2003-RS-AG	LN2003-RS-CG	GaAlAs	Red	660	10	

Features

- 0.3 inch digit height, Gray surface
- Uniformly illuminated segments
- Wide viewing angle
- Easy mounting on PCB or socket

Description

LN2003 series display is fully compatible with industry standard 0.3" package with options of low current (-xxL), common anode (-Axx) and common cathode (-Cxx).