



Micro Commercial Components  
21201 Itasca Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

## 1N5400GP THRU 1N5408GP

### Features

- Low Current Leakage
- Metalurgically Bonded Construction
- Low Forward Voltage
- High Current Capability
- Glass Passivated Junction


### Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 30°C/W Junction To Lead

| MCC Catalog Number | Device Marking | Maximum Recurrent Peak Reverse Voltage | Maximum RMS Voltage | Maximum DC Blocking Voltage |
|--------------------|----------------|----------------------------------------|---------------------|-----------------------------|
| 1N5400GP           | ---            | 50V                                    | 35V                 | 50V                         |
| 1N5401GP           | ---            | 100V                                   | 70V                 | 100V                        |
| 1N5402GP           | ---            | 200V                                   | 140V                | 200V                        |
| 1N5404GP           | ---            | 400V                                   | 280V                | 400V                        |
| 1N5406GP           | ---            | 600V                                   | 420V                | 600V                        |
| 1N5407GP           | ---            | 800V                                   | 560V                | 800V                        |
| 1N5408GP           | ---            | 1000V                                  | 700V                | 1000V                       |

## 3 Amp Glass Passivated Rectifier 50 - 1000 Volts

### DO-201AD

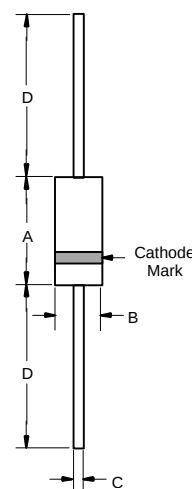


### Electrical Characteristics @ 25°C Unless Otherwise Specified

|                                                         |             |                                       |                                                       |
|---------------------------------------------------------|-------------|---------------------------------------|-------------------------------------------------------|
| Average Forward Current                                 | $I_{F(AV)}$ | 3.0A                                  | $T_A = 105^\circ\text{C}$                             |
| Peak Forward Surge Current                              | $I_{FSM}$   | 200A                                  | 8.3ms, half sine                                      |
| Maximum Instantaneous Forward Voltage                   | $V_F$       | 1.1V                                  | $I_{FM} = 3.0A$ ;<br>$T_J = 25^\circ\text{C}^*$       |
| Maximum DC Reverse Current At Rated DC Blocking Voltage | $I_R$       | 5.0 $\mu\text{A}$<br>50 $\mu\text{A}$ | $T_J = 25^\circ\text{C}$<br>$T_J = 125^\circ\text{C}$ |
| Typical Junction Capacitance                            | $C_J$       | 40pF                                  | Measured at<br>1.0MHz, $V_R=4.0V$                     |

\*Pulse test: Pulse width 300  $\mu\text{sec}$ , Duty cycle 1%


| DIMENSIONS |        |      |       |      |      |
|------------|--------|------|-------|------|------|
| DIM        | INCHES |      | MM    |      | NOTE |
|            | MIN    | MAX  | MIN   | MAX  |      |
| A          | ---    | .370 | ---   | 9.50 |      |
| B          | ---    | .250 | ---   | 6.40 |      |
| C          | .048   | .052 | 1.20  | 1.30 |      |
| D          | 1.000  | ---  | 25.40 | ---  |      |

Figure 1  
Typical Forward Characteristics

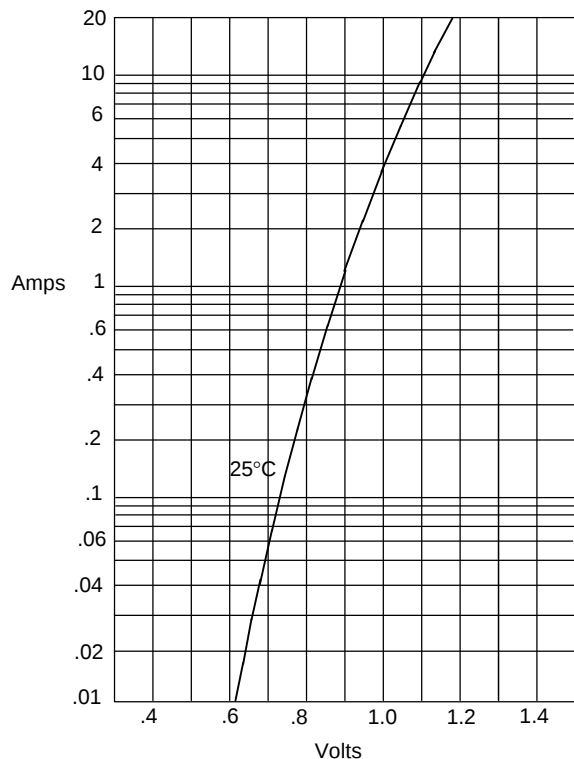


Instantaneous Forward Current - Amperes versus  
Instantaneous Forward Voltage - Volts

Figure 2  
Forward Derating Curve

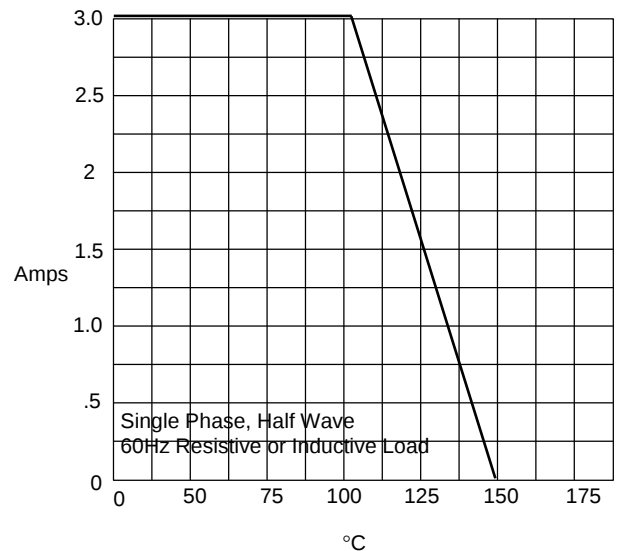


Average Forward Rectified Current - Amperes versus  
Ambient Temperature - °C

Figure 3  
Junction Capacitance

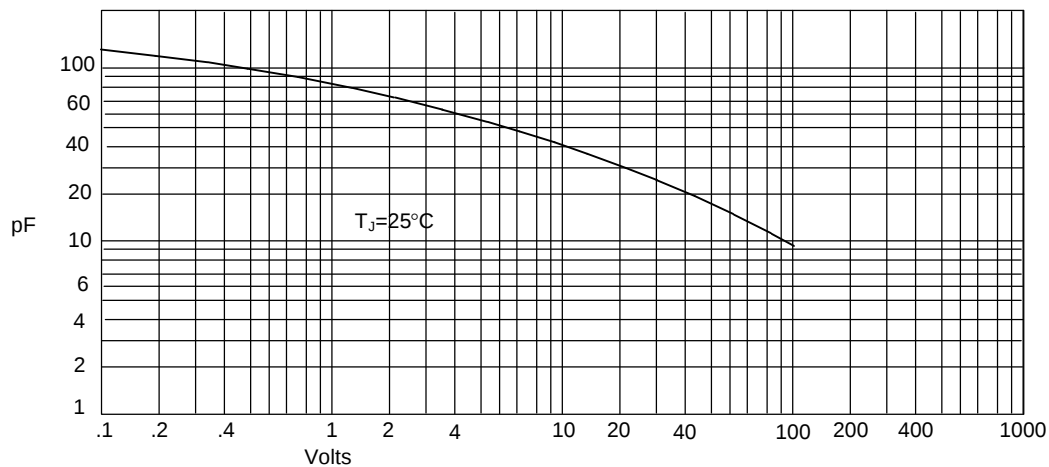


Junction Capacitance - pF versus  
Reverse Voltage - Volts

Figure 4  
Typical Reverse Characteristics

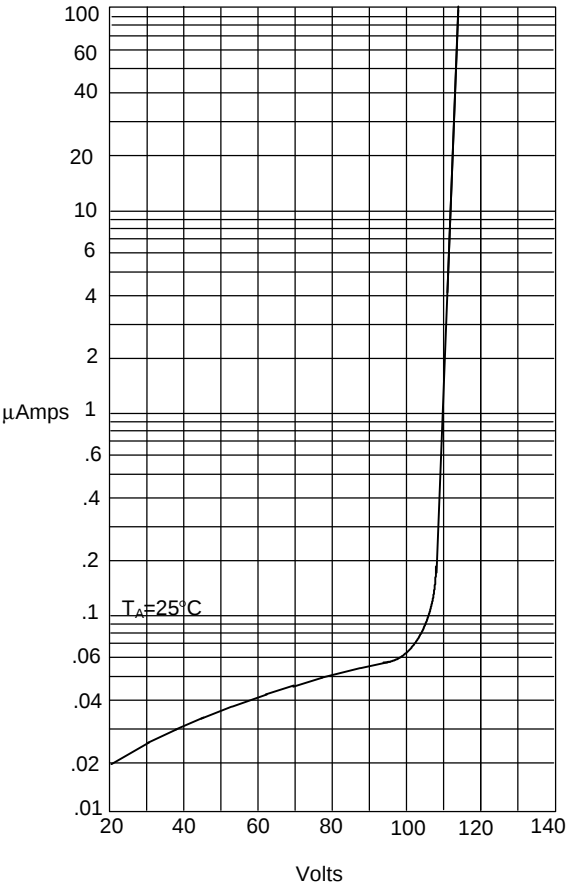

Instantaneous Reverse Leakage Current - MicroAmpere*versus*  
Percent Of Rated Peak Reverse Voltage - Volts

Figure 5  
Peak Forward Surge Current

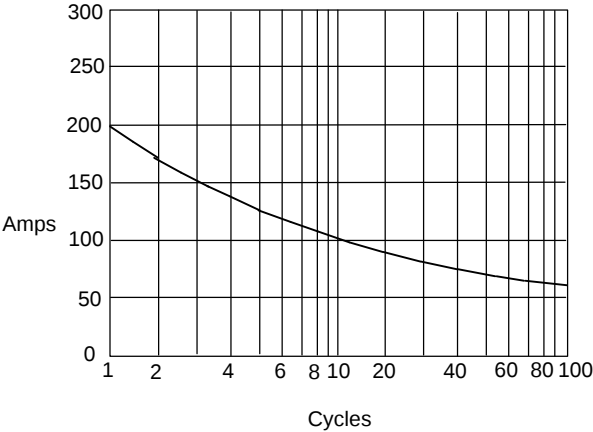

Peak Forward Surge Current - Amperes*versus*  
Number Of Cycles At 60Hz - Cycles