




REVISIONS			
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE	

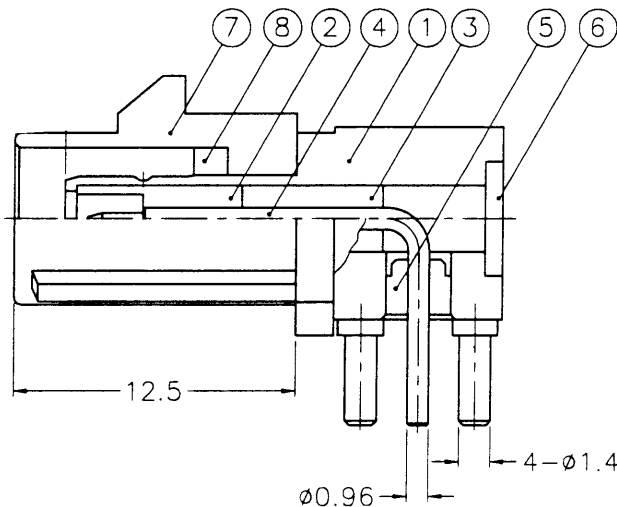

PCB MOUNTING HOLE

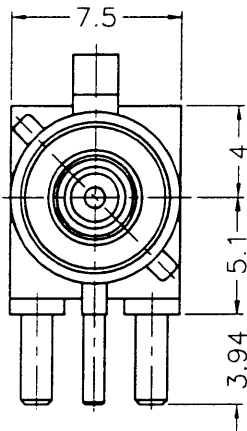

* HEATING STAGE: RECOMMEND SOLDERING TEMPERATURE 225°C WITHIN 40 SECONDS.

8	RING	NOTE 1	NOTE 2	1	FKLR00101A	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				PART NO.		Amphenol – Kai Jack TAINAN TAIWAN		
7	LOCK COVER	NOTE 7		1	SEE TABLE					APPROVED <i>Lead, 2/</i> DATE 10-23-02'				
6	COVER	NOTE 8	NOTE 2	1	CV-523X06-T-B					CHECKED <i>Lead, 2/</i> DATE 10-23-02'				
5	INSULATOR	NOTE 5	NATURAL	1	FKNS01501A					DRAWN <i>LILY</i> DATE 10-23-02'				
4	CONTACT PIN	NOTE 1	NOTE 3	1	FKCP01203A									
3	INSULATOR	NOTE 5	NATURAL	1	FKNS00906A									
2	INSULATOR	NOTE 5	NATURAL	1	FKNS00401A									
1	BODY	NOTE 6	NOTE 4	1	FKBD03501A					TITLE				FAKRA SMB R/A PCB MOUNT PLUG
											DRAWING NO.		FK1252XX-005-NT30G-50	
											ITEM NO.		FK1252AEX02NC5F	
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	1	FILE NO.	F:\DWG\FK\1252XX\005\50\NT30G			